# BEFORE THE NEW MEXICO OIL CONSERVATION DIVISION

APPLICATION OF TROVE ENERGY AND WATER, LLC FOR APPROVAL OF A SALT WATER DISPOSAL WELL, LEA COUNTY, NEW MEXICO.

Case No.	
----------	--

#### **APPLICATION**

Trove Energy and Water, LLC applies for an order approving a salt water disposal well, and in support thereof, states:

- 1. Applicant proposes to drill the WLC Mid Fed. SWD Well No. 3, located 2075 feet from the south line and 2 feet from the west line of Section 10, Township 25 South, Range 33 East, N.M.P.M., Lea County, New Mexico.
- 2. Applicant proposes to dispose produced water into the Devonian formation in the well at depths of 16990 18900 feet subsurface.
  - 3. A Form C-108 for the subject well is attached hereto as Exhibit A.
  - 4. The granting of this application will prevent waste and protect correlative rights.

**WHEREFORE**, applicant requests that, after notice and hearing, the Division enter its order approving this application.

Respectfully submitted,

James Bruce

Post Office Box 1056

Santa Fe, New Mexico 87504

(505) 982-2043

Attorney for Trove Energy and Water, LLC

				Revised March 23, 2017
RECEIVED:	REVIEWER:	TYPE:	APP NO:	
	- Geologic 1220 South St. Fr	ABOVÉTHISTABLE FOR OCCIDIVE  CO OIL CONSERVA  Cal & Engineering  ancis Drive, Santa	<b>TION DIVISIO</b> Bureau – Fe, NM 8750	5
THIS C	HECKLIST IS MAND ATORY FOR AL	ATIVE APPLICATION  L ADMINISTRATIVE APPLICATION  QUIRE PROCESSING AT THE D	ONS FOR EXCEPTION	JS TO DIVISION RULES AND
ell Name: WLC-	nergy and Water, LLC M Federal SWD No.3			RID Number: 372488 :30-025-xxxxx
Proposed: SWD	; Devonian-Silurian			Ol Code: 97869
A. Location -	CATION: Check those to Spacing Unit – Simult	Which apply for [A] aneous Dedication	V	S THE TYPE OF APPLICATION
[	SL NSP <sub>(PRI</sub> ne only for [1] or [11]  ningling – Storage – Mi  DHC CTB PL  ion – Disposal – Pressu  WFX PMX SV	easurement .C	S DOLM	
A. Offset of B. Royalty C. Application D. Notification E. Surface G. For all of	REQUIRED TO: Check to perators or lease hold of overriding royalty over ation requires published ation and/or concurred to the above, proof of the above, proof of ice required	ders vners, revenue own ed notice ent approval by SLO ent approval by BLM		POR OCD ONLY  Notice Complete  Application Content Complete  ched, and/or,
CERTIFICATION: administrative of understand the	I hereby certify that the approval is accurate of	and <b>complete</b> to the en on this application	hest of my kr	s application for nowledge. I also quired information and
Note	e: Statement must be complete	ed by an individual with m	anagerial and/or su	pervisory capacity.
en Stone			3/26/2019 Date	

Print or Type Name EXHIBIT Signature

903-488-9850 Phone Number ben@sosconsulting.us e-mail Address





March 26, 2019

New Mexico Oil Conservation Division 1220 South St. Francis Drive Santa Fe, New Mexico 87505

Attn: Mr. Gabriel Wade Acting Director

Re: Application of Trove Energy and Water, LLC to permit for salt water disposal the proposed WLC Mid Federal SWD No.3, to be located in Section 10, Township 25 South, Range 33 East, NMPM, Lea County, New Mexico.

Dear Mr. Wade,

Please find the enclosed form C-108 Application for Authority to Inject, supporting the above-referenced request for salt water disposal. The well will be operated as a commercial endeavor offering operators in the area additional options for produced water disposal.

Trove Energy and Water is a developing salt water disposal services to operators in southeast New Mexico and seeks to optimize efficiency, both economically and operationally, of all its operations. Approval of this application is consistent with that goal as well as the NMOCD's mission of preventing waste and protection of correlative rights.

This application for a proposed Devonian SWD interval includes the currently mandated increased One-Mile Area of Review including pertinent and available seismic information for the area and region. Published legal notice ran March 14, 2018 in the Hobbs News-Sun and all offset operators and other interested parties have been notified individually. The legal notice affidavit is included with this application. The application also includes a wellbore schematic, area of review maps, affected party plat and other required information for a complete Form C-108. The well is located on federal surface and minerals and the Bureau of Land Management CFO and offset operators have been notified of this application. State minerals offset as well and the Oil and Gas Division of the State land Office were noticed.

I respectfully request that the approval of this salt water disposal well proceed swiftly and if you or your staff requires additional information or has any questions, please do not hesitate to call or email me.

Best regards,

Ben Stone, Partner SOS Consulting, LLC

Agent for Trove Energy and Water, LLC

Cc: Application attachment and file

STATE OF NEW MEXICO ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT

#### Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, New Mexico 87505

FORM C-108 Revised June 10, 2003

#### **APPLICATION FOR AUTHORIZATION TO INJECT**

			APPLIC	SATION FOR A	AUTHORIZAT	ION TO INJECT	io.		
I.	PURPOSE:	Salt Wa	iter Disposal	and the applic	ation QUALIFIE	ES for administrati	ive approval.		
II.	OPERATOR: ADDRESS:	Trove E 1919 No	nergy and Worth Turner, I	Vater, LLC Hobbs, NM 882	240				
	CONTACT PARTY:	Agent:	SOS Consul	ting, LLC – Be	n Stone (903)	488-9850			
III.	WELL DATA: All we	ell data a	nd applicabl	le wellbore dia	grams are AT	TACHED.			
IV.	This is not an expan	nsion of	an existing p	oroject.					
V.	A map is attached to drawn around each p	hat identi proposed	fies all wells a injection well	and leases with	in two miles of entifies the well	any proposed inje	ection well wi	th a <i>ONE-Mil</i> e radi	us circle
*VI.	A tabulation is attach There are NO (0) We of each well's type, o NO P&A Wells pend	onstruction	e subject AU	PR which Pene	trate the prop	osed Devonian in	nterval The	data includos a da	corintian
VII.	The following data	is ATTA	CHED on the	proposed opera	ation, including				
	<ol> <li>Proposed averag</li> <li>Whether the syst</li> <li>Proposed averag</li> <li>Sources and an a produced water;</li> <li>If injection is for a chemical analysis wells, etc.).</li> </ol>	em is ope e and ma appropria and, disposal p	en or closed; aximum injecti te analysis of ourposes into	tion pressure; f injection fluid a	and compatibilit	y with the receivin	ne mile of the		A
*VIII.	Appropriate geolog thickness, and dept containing waters w well as any such so	ith total	ne geologic i dissolved sol	name, and dep lids concentrat	oth to bottom of	of all underground	d courses of	daimlein a t - /	
IX.	Stimulation program	n – a con	ventional ac	id job may be	performed to	clean and open t	he formatio	n.	
*X.	Attach appropriate resubmitted). Well	ogging a Logs wil	nd test data I be filed with	on the well. (I	f well logs hav	e been filed with	the Division	n, they need not be	e
*XI.	There are NO water ATTACHED.	wells/P	ODs within o	one mile of the	proposed sal	t water disposal	well. Repre	esentative analyse	s are
XII.	An affirmative state was found of open f water.	ement is aults or a	ATTACHED to any other hydrony	that available g rologic connecti	geologic and e on between the	engineering data e disposal zone ar	has been eand any under	xamined and no erground sources of	<i>vidence</i> drinking
XIII.	"Proof of Notice" se and/or mineral own	ection or ers withi	the next pagin 1 mile and	ge of this form I federal and st	has been cor ate minerals -	npleted and ATT. all have been no	ACHED. Th	nere are 4 offset les location is Federa	ssees al.
XIV.	Certification: I hereby belief.								
	NAME: Ben St	one	TITLE:	SOS Consultin	g, LLC agent	for Trove Energy	and Water	LLC	
	SIGNATURE:	X.	5		-	3,	DATE:	2/26/2040	

\* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be resubmitted. Please show the date and circumstances of the earlier submittal:

 $\hbox{E-MAIL ADDRESS: } \textit{ben@sosconsulting.us}$ 

#### FORM C-108 - APPLICATION FOR AUTHORIZATION TO INJECT (cont.)

- III. WELL DATA The following information and data is included (See ATTACHED Wellbore Schematic):
- A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:
  - (1) Lease name; Well No., Location by Section, Township and Range; and footage location within the section.
  - (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
  - (3) A description of the tubing to be used including its size, lining material, and setting depth.
  - (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District Offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

- B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.
  - (1) The name of the injection formation and, if applicable, the field or pool name.
  - (2) The injection interval and whether it is perforated or open-hole.
  - (3) State if the well was drilled for injection or, if not, the original purpose of the well.
  - (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
  - (5) Give the depth to and the name of the next higher and next lower oil or gas zone in the area of the well, if any.
- XIV. PROOF OF NOTICE pursuant to the following criteria is ATTACHED.

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) The intended purpose of the injection well; with the exact location of single wells or the Section, Township, and Range location of multiple wells;
- (3) The formation name and depth with expected maximum injection rates and pressures; and,
- (4) A notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

# C-108 - Items III, IV, V

Item III - Subject Well Data

Wellbore Diagram - PROPOSED

## Item IV - Tabulation of AOR Wells

NO wells penetrate the proposed injection interval.

# Item V - Area of Review Maps

- 1. Two Mile AOR Map with One-Mile Fresh Water Well Radius
  - 2. One-Half Mile AOR Map

All Above Exhibits follow this page.


# WELL SCHEMATIC - PROPOSED WLC Mid Federal SWD Well No.3



#### API 30-025-xxxxx

2075' FSL & 2' FWL, SEC. 10-T25S-R33E LEA COUNTY, NEW MEXICO SWD; Devonian-Silurian (97869)

Spud Date: 11/01/2019 SWD Config Dt: 12/15/2019

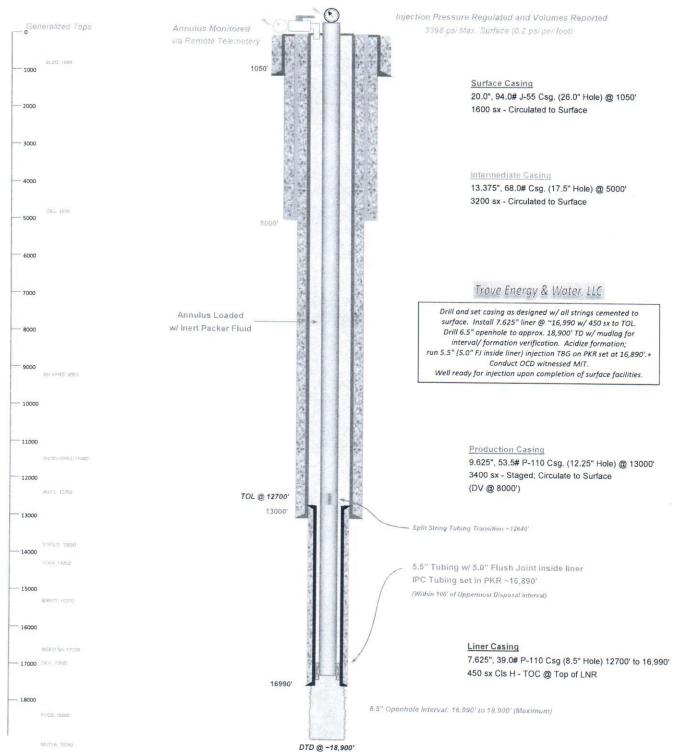

Drawn by: Ben Stone, 3/25/2019




WLC Mid Federal SWD No.3 - Area of Review / 2 Miles

located within one mile. NO Water Wells (Attachment to NMOCD Form C-108 - Item V) S CK & Notice Radius Water Well N.M. 181 101 191 2075' FSL & 2' FWL Sec. 10, Twp 25S, Rng 33E 32.143497, Long. -103.568759 WLC Mid Federal SWD No.3 E. 12 St API No. 30-025-xxxx TROVE ENERGY and WATER 101 0 Lat. 15 13

# WLC Mid Federal SWD Well No.3 - One Mile Area of Review / Overview Map

(Attachment to NMOCD Form C-108, Application for Authority to Inject.)

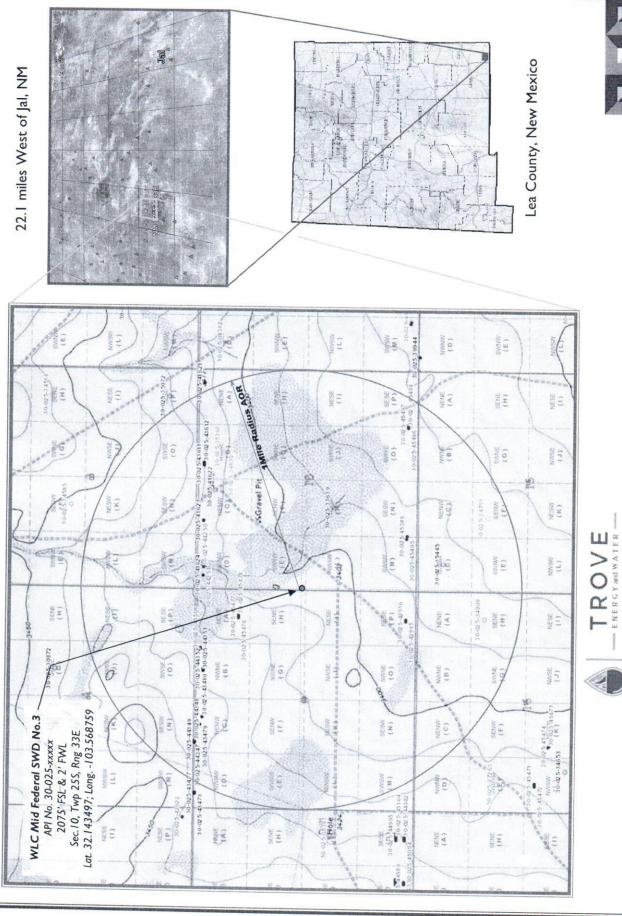



Area of Review Well Data

# THERE ARE NO WELLS WHICH PENETRATE THE PROPOSED DEVONIAN FORMATION IN THE ONE-HALF MILE AREA of REVIEW

# **C-108 ITEM X**

# LOGS and AVAILABLE TEST DATA

A Standard Suite of Logs will be run after drilling the well and submitted to the Division.

# C-108 ITEM VII - PROPOSED OPERATION

#### Trove WLC Mid Federal SWD #3

#### Commercial SWD Facility

Upon approval of all permits for SWD, operations would begin within 30 days. Completion of the well operations will take approximately 6-8 weeks. Facility construction including installation of the tank battery, berms, plumbing and other and associated equipment would be occurring during the same interval but at a different location from the well. In any event, it is not expected for the construction phase of the project to last more than 60 days, depending on availability of contractors and equipment.

#### Configure for Salt Water Disposal

Prior to commencing any work, an NOI sundry(ies) will be submitted to configure the well for SWD and will detail the completion workover including all work otherwise described above, any change to the procedure noted herein and to perform mechanical integrity pressure test per OCD test procedures. (Notify NMOCD 24 hours prior.) The casing/tubing annulus will be monitored for communication with injection fluid or loss of casing integrity.

#### **Operational Summary**

The SWD facility will not be fenced so that trucks may access for load disposal 24/7.

Future plans would include tying the SWD into a pipeline so the well and injection equipment will be a closed system and equipped with pressure limiting devices and volume meters. The annulus, loaded with an inert, anti-corrosion packer fluid, will be monitored for pressure.

The facility and tanks will be equipped with telemetry devices and visual alarms to alert the operator and customers of full tanks or an overflow situation.

Anticipated daily maximum volume is 30,000 bpd and an average of 17,500 bpd at a maximum surface injection pressure of 3398 psi (.2 psi/ft gradient – maximum pressure will be adjusted If the top of interval is modified after well logs are run).

Potential releases will be contained and cleaned up immediately. The operator shall repair or otherwise correct the situation within 48 hours before resuming operations. OCD will be notified within 24 hours of any release greater than 5 bbls. If required, remediation will start as soon as practicable. Operator shall comply with 19.15.29 NMAC and 19.15.30 NMAC; as necessary and appropriate and OCD form C-141 will be submitted promptly.

# C-108 ITEM VII - PRODUCED WATER ANAYLSES

Item VII.4 - Water Analysis of Source Zone Water

Delaware Bone Spring Wolfcamp

Item VII.5 - Water Analysis of Disposal Zone Water

Devonian

Water Analyses follow this page.

# C-108 Item VII.5 - Produced Water Data Trove Energy & Water, LLC - WLC Mid Federal Project Area

#### SOURCE ZONE

DE	LA	W	Δ	R	F

Lab ID

API No 3001510181 Sample ID

5532

**Well Name** 

SUPERIOR STATE

002

Sample No

Location ULSTR 08 25 S 30 E

Lat / Long 32.14281

-103.89616

1980 660 E

County Eddy

Operator (when sampled)

Field

CORRAL CANYON

Unit I

Sample Date

Analysis Date

Sample Source SWAB

Depth (if known)

Water Typ

ph

alkalinity\_as\_caco3\_mgL

ph\_temp\_F

hardness\_as\_caco3\_mgL

specificgravity

hardness\_mgL

specificgravity\_temp\_F

resistivity\_ohm\_cm

tds\_mgL

155173

resistivity\_ohm\_cm\_temp\_

tds\_mgL\_180C chloride\_mgL

92820

conductivity

conductivity\_temp\_F

sodium\_mgL calcium\_mgL

carbonate\_mgL

iron\_mgL

bicarbonate\_mgL

sulfate\_mgL

barium\_mgL

hydroxide\_mgL

magnesium\_mgL

h2s\_mgL

potassium\_mgL

co2\_mgL

strontium\_mgL

o2\_mgL

manganese\_mgL

anionremarks

Remarks

(Produced water data courtesy of NMT Octane NM WAIDS database.)



122

133

# C-108 Item VII.5 - Produced Water Data Trove Energy & Water, LLC - WLC Mid Federal Project Area

#### SOURCE ZONE

BON	NE SPRING	3										
DOI	IL OI KIIK	•							Lab ID			
	API No	3002533	529						Sample		6681	
	Well Name	THYME	APY FE	DERA	AL.	002			Sample	: No		
	Location	Location ULSTR 01 23 S 32 E					Lat / Long	at / Long 32.33657 -103.62470				
		1	650	N	1650	E			County	Lea		
	Operator	(when sa	mpled)									
			Field	F	RED TA	NK			Unit G			
	Sar	mple Date		11/	27/200	1	Analysis Date					
			Samp	ام جما	irco			D45 (	· · · · · · · · · · · · · · · · · · ·			
			Water		urce			Depth (i	if known)			
	nh			. , , ,								
	ph	-				6.1		y_as_caco3_				
	ph_ter							ss_as_caco3	_mgL			
		icgravity				1.15	hardnes	ss_mgL				
	specif	icgravity_te	emp_F				resistivi	ty_ohm_cm				
	tds_m	gL				172896	resistivi	ty_ohm_cm_	temp			
	tds_m	gL_180C					conduct	tivity				
	chloric	le_mgL				104976	conduct	ivity_temp_F	ž.			
	sodiun	n_mgL					carbona	ite_mgL				
	calciur	m_mgL				0	bicarbo	nate_mgL			781	
	iron_m	ngL				0	sulfate_	mgL		1	150	
	barium	n_mgL				0	hydroxid	de_mgL				
	magne	esium_mgl	_			2025	h2s_mg	L			0	
	potass	ium_mgL					co2_mg	L				
	stronti	um_mgL					o2_mgL					
	manga	nese_mgl					anionrer	marks				

(Produced water data courtesy of NMT Octane NM WAIDS database.)

Remarks



# C-108 Item VII.5 - Produced Water Data Trove Energy & Water, LLC - WLC Mid Federal Project Area

#### SOURCE ZONE

WO	LFC	AMP
----	-----	-----

Lab ID

API No 3002501678

Sample ID Sample No

5096

**Well Name** LAGUNA PLATA FEDERAL UNIT 001

Location ULSTR 22 19 S 33 E 1980

Lat / Long 32.64341

-103.64461

Lea

County

S Operator (when sampled)

> Field TONTO

710

Unit I

Sample Date

Analysis Date

Sample Source DST

Water Typ

Depth (if known)

ph

alkalinity\_as\_caco3\_mgL

46915

E

hardness\_as\_caco3\_mgL

ph\_temp\_F specificgravity

hardness\_mgL

specificgravity\_temp\_F

resistivity\_ohm\_cm

tds\_mgL

resistivity\_ohm\_cm\_temp

tds\_mgL\_180C

conductivity

chloride\_mgL

27270

sodium\_mgL

conductivity\_temp\_F

calcium\_mgL

carbonate\_mgL bicarbonate\_mgL

714

iron\_mgL

sulfate\_mgL

1116

barium\_mgL

hydroxide\_mgL

magnesium\_mgL

h2s\_mgL

potassium\_mgL

co2\_mgL

strontium\_mgL

o2\_mgL anionremarks

manganese\_mgL Remarks

(Produced water data courtesy of NMT Octane NM WAIDS database.)



# C-108 Item VII.5 - Produced Water Data Trove Energy Water, LLC - WLC Mid Federal Project Area

#### **DISPOSAL ZONE**

DEV	ONIAN										Lab ID			
	API No	300252	1082								Sample	) ID		5720
	Well Name	ANTEL		IDGE	LINII	т	003				Sample			3720
											2004 (MARIN 1 2020)			
	Location		34 1980	23	S	34	E		Lat / Long	32.25922	-103	3.46068		
			1980	S	1	650	W				County	Lea		
	Operator	(when sa	ampled	)										
			Fiel	d	AN	TELC	PE RIDG	E			Unit K			
	San	nple Date		1	11/14	/1967		Analys	is Date					
			San	nnla S	OUTO	o LINII	KNOWN							
				ter Typ		UNI	KNOVVN			Depth (if	known)			
	ph						6.9		alkalinity	_as_caco3_n	ngL			
	ph_ten	np_F							hardness	s_as_caco3_	mgL			
	specifi	cgravity							hardness	s_mgL				
	specifi	cgravity_t	temp_F						resistivit	y_ohm_cm				
	tds_mg	gL					80187			y_ohm_cm_te	emn			
	tds_mg	L 180C							conducti		3/11P_			
	chloride	e mal					47900							
	sodium						47900			vity_temp_F				
									carbonat					
	calcium								bicarbon	ate_mgL			476	
	iron_m	gL							sulfate_n	ngL			900	
	barium	_mgL							hydroxide	e_mgL				
	magnes	sium_mgL							h2s_mgL					
	potassi	um_mgL							co2_mgL	<u> </u>				

(Produced water data courtesy of NMT Octane NM WAIDS database.)

o2\_mgL

anionremarks

strontium\_mgL

manganese\_mgL

Remarks



#### **Geologic Information**

The Devonian and Silurian consist of carbonates including light colored dolomite and chert intervals interspersed with some tight limestone intervals. Several thick sections of porous dolomite capable of taking water are believed present within the subject formations in the area. Depth control data was inferred from deep wells to the south and east. If the base of Devonian and top of Silurian rocks come in as expected the well will only be drilled deep enough for adequate logging rathole.

At a proposed depth of 18,900' BGL (Below Ground Level) the well will TD approximately 1,910' below the estimated top of the Devonian. Mud logging through the interval will ensure the target interval remains in Devonian and Silurian. Once Devonian is determined, the casing shoe depth will be set at an approximate maximum upper depth of 16,990' BGL. Injection will occur through the resulting openhole interval. Should mud or other logs indicate depth adjustment is required to exploit the desired formation as described; sundries with appropriate data will be filed with the OCD.

The Devonian is overlain by the Woodford Shale and Mississippian Lime and underlain by the Middle and Lower Ordovician; Simpson, McKee and Ellenburger.


Fresh water in the area is generally available from the Rustler and Santa Rosa formations. State Engineer's records show water wells in the area with a depth to groundwater of 90 to 185 feet and an average depth of 142 feet.

There are NO water wells located within one mile of the proposed SWD however; a representative analysis of area fresh water is included in this application.

Geological Data

# EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT

Map Source: <u>State of stress in the Permian Basin, Texas and New Mexico</u>: <u>Implications for induced seismicity (Figure 1)</u>; Jens-Erik Lund Snee/ Mark Zoback, February 2018

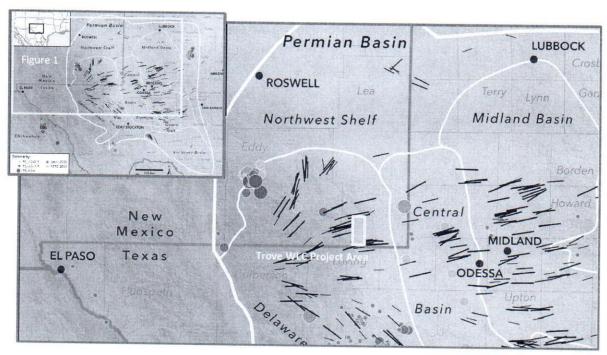

TROVE PSE PROJECT VICINITY

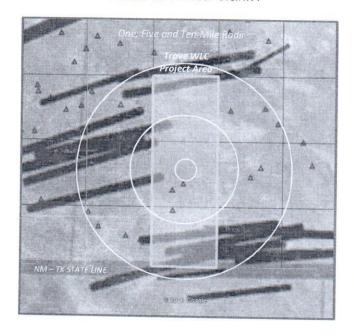


Figure 1. State of stress in the Permian Basin, Texas and New Mexico. Black lines are the measured orientations of the maximum horizontal stress (SHmax), with line length scaled by data quality. The colored background is an interpolation of measured relative principal stress magnitudes (faulting regime) expressed using the Aφ parameter (see text for details) of Simpson (1997). Blue lines are fault traces known to have experienced normalsense offset within the past 1.6 Ma, from the USGS Quaternary Faults and Folds Database (Crone and Wheeler, 2000). The boundary between the Shawnee and Mazatzal basement domains is from Lund et al. (2015), and the Precambrian Grenville Front is from Thomas (2006). The Permian Basin boundary is from the U.S. Energy Information Administration, and the subbasin boundaries are from the Texas Bureau of Economic Geology Permian Basin Geological Synthesis Project. Earthquakes are from the USGS National Earthquake Information Center, the TexNet Seismic Monitoring Program, and Gan and Frohlich (2013). Focal mechanisms are from Saint Louis University (Herrmann et al., 2011).


Geological Data

## EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

In the following map, a layer with USGS historical earthquake data is overlaid and, a layer showing lines to represent Precambrian faults as documented by Ruppel, et al. (2005). Finally, a layer showing all currently permitted SWDs completed or proposed to be completed in the Devonian (Silurian) formation.

The USGS earthquakes shown are well known to the area. The 2012 quake located approximately 13 miles due east of Loving is also shown (22.4 miles). This was perhaps the most significant of the area in recent years but was determined to not be related to oil and gas activity. The best known and largest in recent history was the 1992, 4.6 magnitude quake centered south of Eunice, NM (29.5 miles).

The Precambrian faults and existing Devonian SWDs are discussed in more detail on the next page.

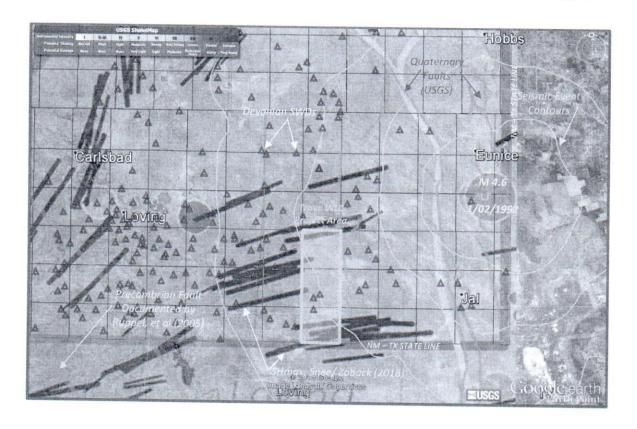


REGIONAL VIEW - DEVONIAN SWD LOCATIONS, PRECAMBRIAN FAULTS, SHMAX, USGS MAGNITUDE

Geological Data

# EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

The primary Precambrian faults in the area as documented by Ruppel, et al. (2005) is represented on this map by the thick, pink colored lines. The most significant of these is the fault associated with the Rio Grande Rift, running southeast to northwest and, runs adjacent to a portion of Hwy 285 however; only a small portion the associated fault which runs parallel approximately 15 miles northeast is depicted below. The Trove WLC Project SWD Area is located some 30 miles from the fault. Other documented faults (USGS, 2000) are shown for eastern Lea County and extending into west Texas. Other Devonian SWDs in the area are also shown (small purple triangles) completed or proposed to be completed in the Devonian (Silurian) formation.


The previously referenced study by Snee and Zoback (shown on previous exhibits) evaluated the strike-slip probability using probabilistic FSP (Fault Slip Potential) analysis of known faults in the Permian Basin. The study predicts that the Precambrian fault shown here has less than a 10% probability of being critically stressed to the point of creating an induced seismicity event. The main reason for the low probability is due to the relationship of the strike of the fault to the regional S<sub>Hmax</sub> orientation; the proposed SWD being well removed from the area.

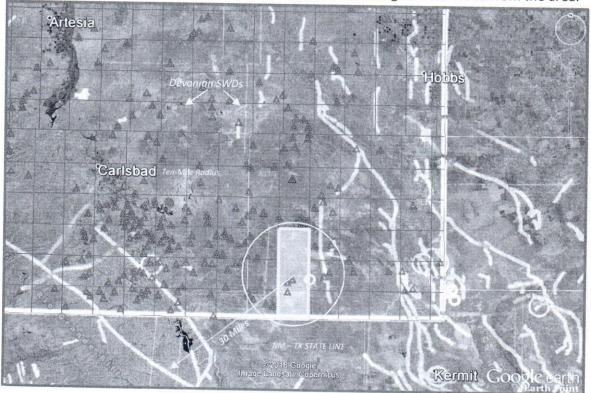


VICINITY - PERMITTED DEVONIAN SWDs, COMPOSITE FAULTS

Geological Data

# EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

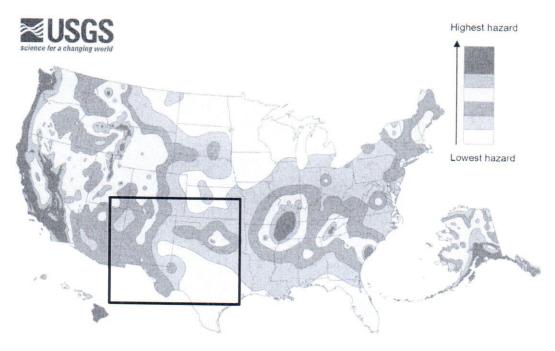


**2014 map data:** The USGS notes in its report that <u>fracking</u> may be to blame for a sizeable uptick in earthquakes in places like <u>Oklahoma</u>. "Some states have experienced increased seismicity in the past few years that may be associated with human activities such as the disposal of wastewater in deep wells," the report says. USGS hopes to use that data in future maps but it isn't included in this one. "Injection-induced earthquakes are challenging to incorporate into hazard models because they may not behave like natural earthquakes and their rates change based on man-made activities," the report says.

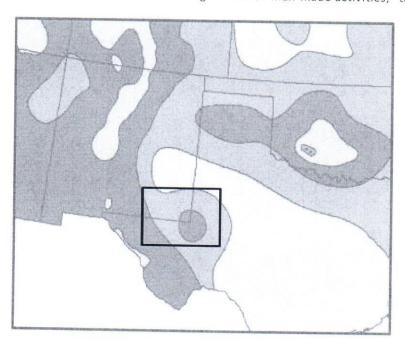

Geological Data

EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

USGS 2014 REGIONAL MAP DATA OVERLAY IN GOOGLE EARTH W/ HISTORICAL EARTHQUAKES

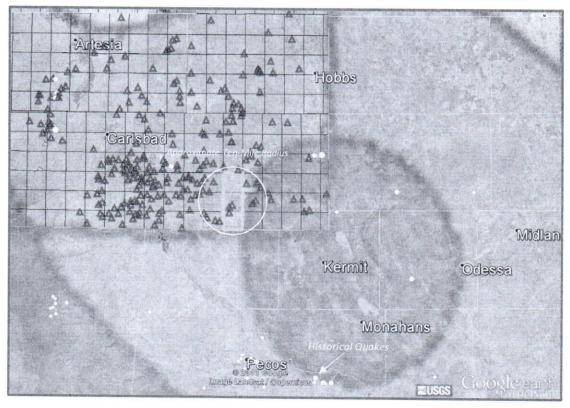


An updated USGS map for 2018 is on the next page. While methodology remained essentially the same according to USGS, the interpreted results and color-coding did have some modification. However, the subject area in southeast New Mexico on both maps remains very low and on the 2018 map, the area is assigned a value of <1% of "potentially minor-damage ground shaking".

Geological Data

# EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

#### USGS 2018 ONE-YEAR MODEL

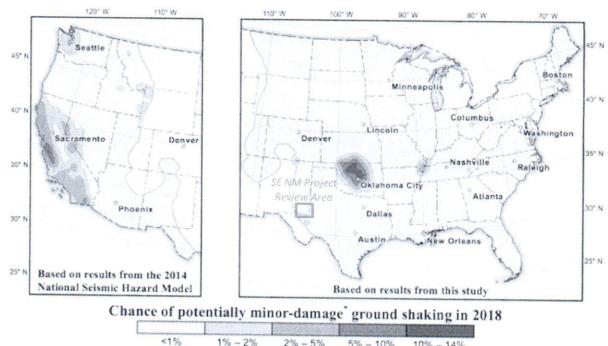

<1% 1% 2% 2% 5% 5% 10% 10% -14%</p>
equivalent to Modified Mercalli Intensity VI, which is defined as: "Felt by all, many frightened. Some heavy furniture moved, a few instances of fallen plaster. Damage slight."


Map showing chance of damage from an earthquake in the Central and Eastern United States during 2018. Percent chances are represented as follows: pale yellow, less than 1 percent; dark yellow, 1 to 2 percent; orange, 2 to 5 percent; red, 5 to 10 percent; dark red, 10 to 12 percent. See Hazard from the western United States from the 2014 National Seismic Hazard Maps (Petersen et al., 2014) for comparison.

The USGS has produced the 2018 one-year probabilistic seismic hazard forecast for the central and eastern United States from induced and natural earthquakes. For consistency, the updated 2018 forecast is developed using the same probabilistic seismicity-based methodology as applied in the two previous forecasts.

Based on publicly available data for the subject area, it is reasonable to believe the risk of induced seismic activity due to disposal injection into this well is extremely low.

#### C-108 - Item XI

Groundwater Basins - Water Column / Depth to Groundwater

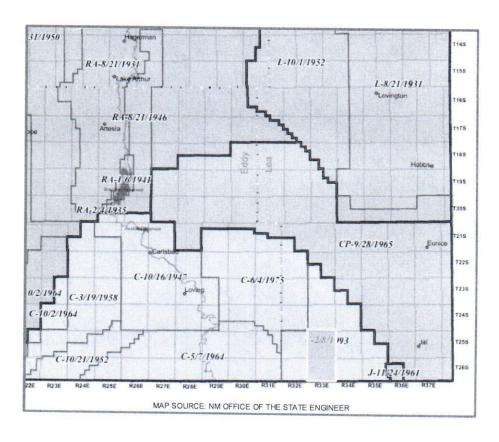

The subject well is located within the Carlsbad Basin.

Fresh water in the area is generally available from the Rustler and Santa Rosa formations. State Engineer's records show water wells in the area with a depth to groundwater of 90 to 185 feet and an average depth of 142 feet.

There are NO water wells located within one mile of the proposed SWD.




# C-108 Item XI

#### Water Wells Within One Mile

# WLC Mid Federal SWD No.3 - Water Well Locator Map

There are NO water wells/ PODs within a one-mile radius of the proposed SWD.

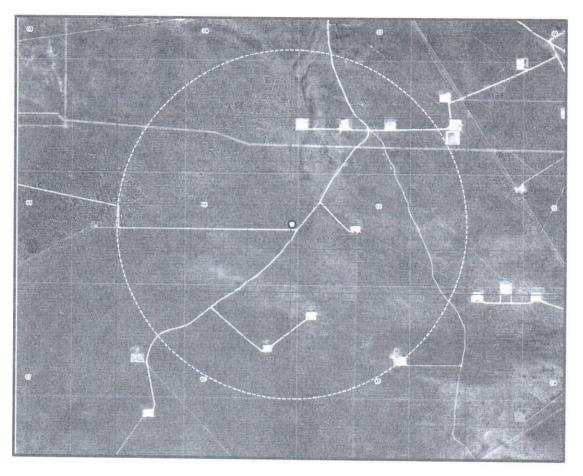

Data from NM Office of the State Engineer displayed in OSE-GIS System.



# C-108 ITEM XII

# Geologic Affirmation

We have examined available geologic and engineering data and have found no evidence of open faults or other hydrologic connection between the disposal interval and any underground sources of drinking water.

Ben Stone, Partner SOS Consulting, LLC

Project:

Trove Energy and Water, LLC

WLC Mid Project Area Reviewed 3/5/2019

# C-108 ITEM XIII - PROOF OF NOTIFICATION

# **IDENTIFICATION AND NOTIFICATION OF INTERESTED PARTIES**

## **Exhibits for Section**

Affected Parties Map

List of Interested Parties


Notification Letter to Interested Parties

**Proof of Certified Mailing** 

**Published Legal Notice** 

# WLC Mid Federal SWD Well No.3 - Affected Parties Plat

(Attachment to NMOCD Form C-108, Application for Authority to Inject.)

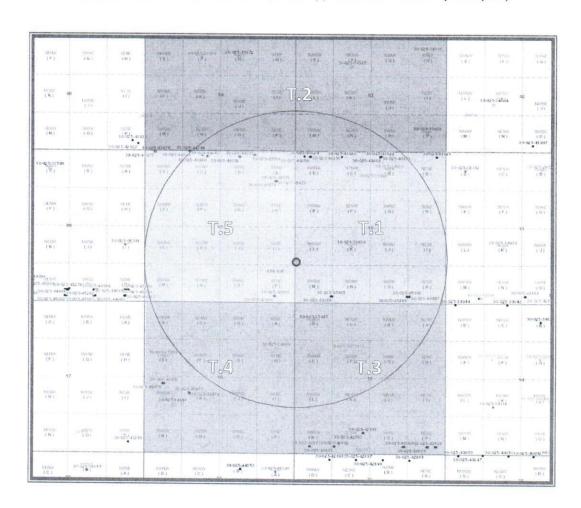



#### LEGEND

- T.1 NMNM-097153 BTA Oil Producers, Inc.
- T.2 NMNM-019859 ConocoPhillips Company
- T.3 NMNM-026079 XTO Holdings, Inc.
- T.4 VB-4422-0002 Energen Resources, Corp.
- T.5 NMNM-118726 EOG Resources, Inc.



# C-108 ITEM XIII – PROOF OF NOTIFICATION AFFECTED PARTIES LIST

SOS Consulting is providing electronic delivery of C-108 applications.

ALL APPLICABLE AFFECTED PARTIES ARE PROVIDED A LINK IN THE NOTICE LETTER

TO A SECURE SOS/ CITRIX SHAREFILE® SITE TO VIEW AND DOWNLOAD

A FULL COPY OF THE SUBJECT C-108 APPLICATION IN PDF FORMAT.

"AFFECTED PERSON" MEANS THE DIVISION DESIGNATED OPERATOR; IN THE ABSENCE OF AN OPERATOR, A LESSEE WHOSE INTEREST IS EVIDENCE BY A WRITTEN CONVEYANCE DOCUMENT EITHER OF RECORD OR KNOWN TO THE APPLICANT AS OF THE DATE THE APPLICANT FILES THE APPLICATION; OR IN THE ABSENCE OF AN OPERATOR OR LESSEE, A MINERAL INTEREST OWNER WHOSE INTEREST IS EVIDENCED BY A WRITTEN CONVEYANCE DOCUMENT EITHER OF RECORD OR KNOWN TO THE APPLICANT AS OF THE DATE THE APPLICANT FILED THE APPLICATION FOR PERMIT TO INJECT.; PER OCD RULES NMAC 19.15.26.7, A. AND 19.15.26.8, B.2.

#### SURFACE OWNER

U.S. DEPARTMENT OF INTERIOR
Bureau of Land Management
Oil & Gas Division
620 E. Greene St.
Carlsbad, NM 88220
Certified: 7018 0360 0001 8569 6989

OFFSET MINERALS LESSEES and OPERATORS (All Notified via USPS Certified Mail)

#### BLM Lease NMNM-097153 (T.1 on Map)

Lessee & Operator

BTA OIL PRODUCERS, INC.
 104 S. Pecos St.
 Midland, TX 79701
 Certified: 7018 0360 0001 8569 6972

#### BLM Lease NMNM-019859 (T.2 on Map)

CONOCOPHILLIPS COMPANY P.O. Box 2197 Houston, TX 77252-2197

#### Operator

COG OPERATING, LLC
Attn: Brian Collins
2208 W. Main Street
Artesia, New Mexico 88210-3720
Certified: 7018 0360 0001 8569 6965

#### BLM Lease NMNM-026079 (T.3 on Map)

Lessee XTO HOLDINGS, LLC 810 Houston Street Fort Worth, TX 76012-620;

#### Operator

EOG RESOURCES, INC. 105 S. 4th St. Artesia, NM 88210 Certified: 7018 0360 0001 8569 6985

# C-108 ITEM XIII - PROOF OF NOTIFICATION AFFECTED PARTIES LIST (cont.)

#### State Lease VB-4422-0002 (T.4 on Map)

Lessee
DIAMONDBACK ENERGY, INC.
ENERGEN RESOURCES. INC.
500 West Texas Ave, Suite 1200
Midland, TX 79701

Operator EOG RESOURCES, INC. 105 S. 4th St. Artesia, NM 88210

#### OFFSET MINERALS OWNERS (Notified via USPS Certified Mail)

U.S. DEPARTMENT OF INTERIOR Bureau of Land Management Oil & Gas Division 620 E. Greene St. Carlsbad, NM 88220

5 STATE OF NEW MEXICO
Oil, Gas and Minerals Division
310 Old Santa Fe Trail
Santa Fe, NM 87504
Certified: 7018 0360 0001 8569 6941


#### REGULATORY

NEW MEXICO OIL CONSERVATION DIVISION (FedEx'ed original and copy) 1220 S. St. Francis Dr. Santa Fe, NM 87505

NEW MEXICO OIL CONSERVATION DIVISION (FedEx'ed copy) 1625 N. French Drive Hobbs, NM 88240

# C-108 - Item XIV

Proof of Notice (Certified Mail Receipts)

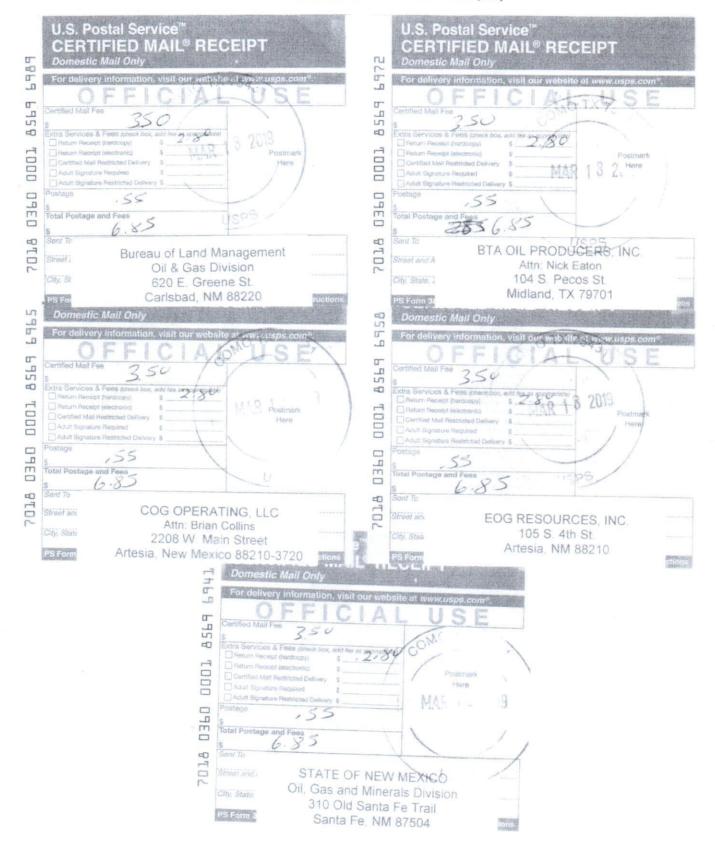

# Affidavit of Publication

STATE OF NEW MEXICO COUNTY OF LEA

I, Daniel Russell, Publisher of the Hobbs News-Sun, a newspaper published at Hobbs, New Mexico, solemnly swear that the clipping attached hereto was published in the regular and entire issue of said newspaper, and not a supplement thereof for a period of 1 issue(s).

> Beginning with the issue dated March 14, 2019 and ending with the issue dated March 14, 2019.

Publisher

Sworn and subscribed to before me this 14th day of March 2019.

Business Manager

My commission expires

January 29, 2023 (Seal)

OFFICIAL SEAL GUSSIE BLACK Notary Public

State of New Mexico
My Commission Expires - 29 - 2

This newspaper is duly qualified to publish legal notices or advertisements within the meaning of Section 3, Chapter 167, Laws of 1937 and payment of fees for said

#### LEGAL NOTICE MARCH 14, 2019

Trove Energy and Water LLC. 1919 North Turner, Hobbs, NM 88240, is filing Form C-108 (Application for Authority to Inject) with the New Mexico Oll Conservation Division seeking administrative approval for a sall water disposal well. The proposed well, the WLC Mid Federal SWD Well No.3 will be located 2075 FSL & 2 FWL Section 10, Township 25 South, Range 33 East, Lea County, New Mexico approximately 22.1 miles west of Jai, NM.

Produced water from area production will be commercially disposed into the Devonian, Silurian and Fusselman formations at a maximum interval depth of 16,990' to 18,900' at a maximum surface pressure of 3398 psi and a rate limited only by such pressure Mudlogging and e-togs will be under the production of the producti

Interested parties wishing to object to the proposed application must file with the N e w Mexico OTI Conservation Division, 1220 St. Francis Dr., Santa Fe, NM 87505, (505)476-3460 within 15 days of the date of this notice. Additional information may be obtained from the applicant's agent. SOS Consulting, LLC (903)488-9850 or, email into 8 sosconsulting us.

67104420

00225806

BEN STONE SOS CONSULTING, LLC. P.O. BOX 300 COMO, TX 75431