


OPERATOR	APACHE CORP		DATE	6-2-2011
LEASE	W A WEIR	WELL NO.	15	LOCATION 990 FSL + 2310 FEL

Sec 26 T19S R36E 30 02S 3400S
LEA County

producing Lower Yeso
6-2011

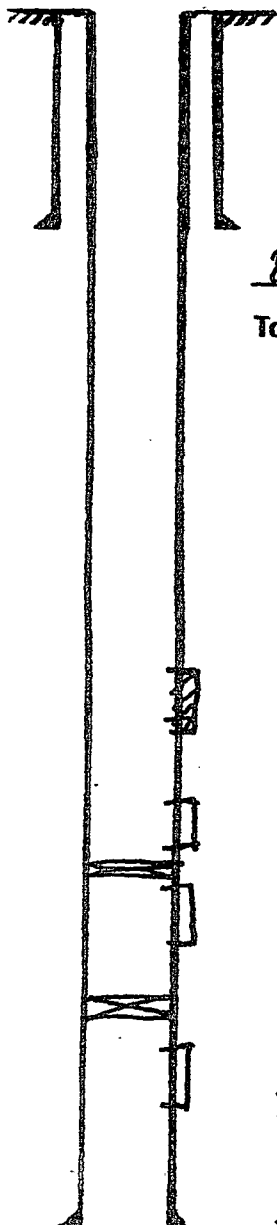

8 5/8" casing set at 1220' with 400 sx of _____ cement
Total Depth 1220' Hole size 11" Circulated

SQZ w/ 100 SX 5854-5924 (5-2003)
perf 5854-5924 (5-2003)

CIBP @ 6637' perf 6592-6616 (5-2003)
Lower Yeso

Perf 6658-6714 (1-2002) Lower Yeso

CIBP @ 7100' (1-2002)

Perf 7130-7378 (7-98) ABO

Perf 7305-25 (7-97) ABO

5 1/2" casing set at 7550' with 1075 sx of _____ cement

Total Depth 7550' Hole size 7 7/8" TOC Calc @

NOTE ECP @ 7123

Cmt 1st w/ 125 SX circ.

Cmt 2nd w/ 1075 SX

5339'
50% efficient

Tasya


Oil Conservation Commission
Case No. 14161
Exhibit 8

OPERATOR	APACHE CORP		DATE	6-2-2011
LEASE	W B MAVEETY	WELL NO.	LOCATION 520FNL + 2310FEL	

Sec 35 T19S1236E
Lea County

30 025 33071

TA'd fill 11/29/11
Monument ABO

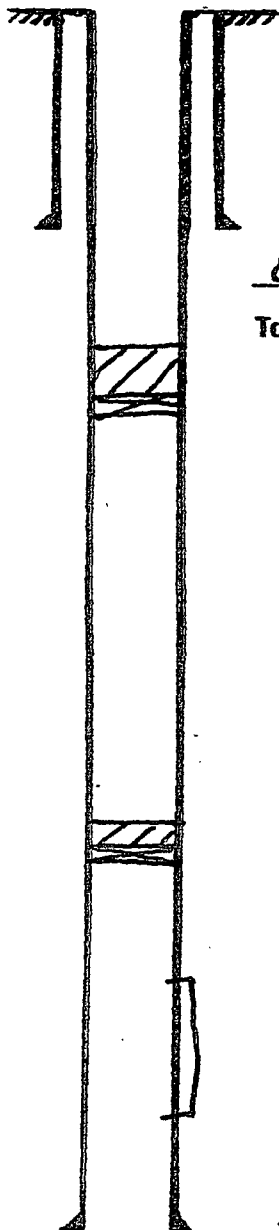

8 5/8" casing set at 1167' with 400 sx of _____ cement
Total Depth 1167' Hole size 11" Circulated

CIBP @ 4207 + 30 SX CMT PBT 3913 (11-2006)
10-1998 CSG LEAK @ 4088-4151
SQZ w/ 300 SX
7-2006 CSG LEAK @ 5520-5595
SQZ w/ 100 SX

CIBP @ 6900' + 35' CMT (11-2006)
perf 6948 - 7372 (7-2006)
perf 7138 - 7207 (10-1998)
perf 7250 - 7372 (6-1997)


5 1/2" casing set at 7610' with 1225 sx of _____ cement
Total Depth 7610' Hole size 7 7/8"

ECF @ 7091'
CMT 1st stage w/ 175 SX Circ
CMT 2nd stage w/ 1050 SX TOC CAL @ 3391
using 50% efficiency

OPERATOR	APACHE CORP		DATE	6-4-2011
LEASE	WB MAVEETY #12	WELL NO.	2310 FNL + 2310 FEL	

Sec 35-19-36 30-025-38406
LA County

Producing Monument ABO
6-2011

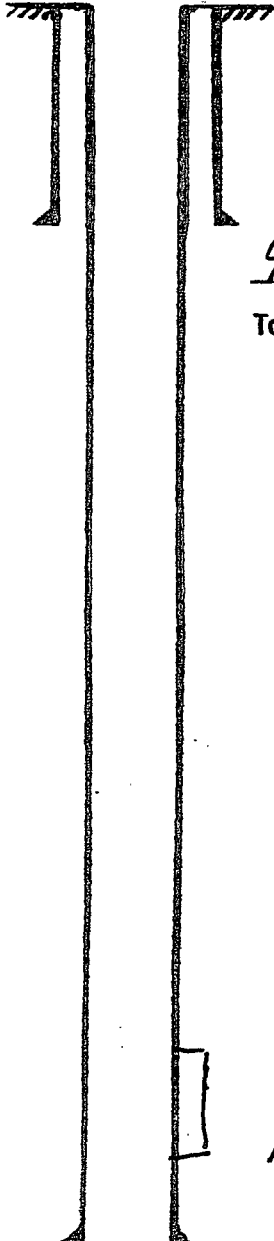

9 5/8" casing set at 1170' with 700 sx of _____ cement
Total Depth 1170' Hole size 12 1/4" Circ

perf 7250 - 7408 ABO 11-2007
perf 7474 - 7578 ABO

7" casing set at 7593' with 1800 sx of _____ cement
Total Depth 7593' Hole size 8 3/4" TOC by CBL
1966

30-025-12482


OPERATOR TARGA MIDSTREAM Services LP	DATE 2-14-2008
LEASE GRAHAM State NET-F	WELL No. 7
LOCATION Unit D 330' FSL & 1650' FEL	

Section 36-T19S-R36E
Lea Co NMA

30-025-12482

SAN ANDRES SWD Well
SWD-561

6-2011

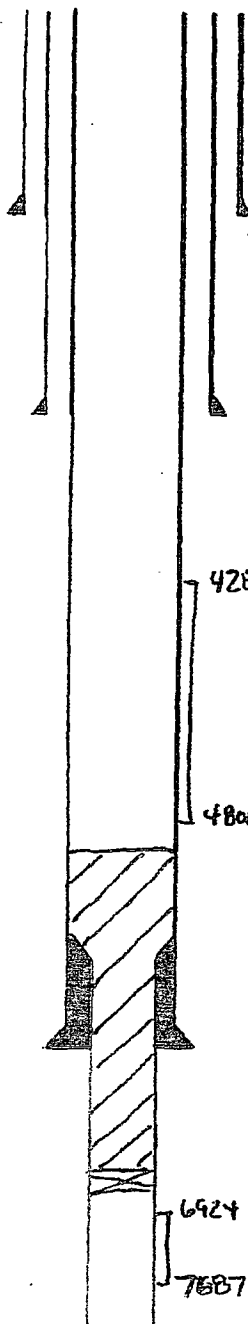

13 3/8 " casing set at 307 ' with 375 sx of _____ cement
Hole size 18 " Circulated

9 5/8 " casing set at 2899 ' with 1750 sx of _____ cement
Hole size 12 1/4 " Circulated

4285 selectively Perf SAN Andres
4285-4800'

4800
Circ Cement inside 5 1/2" CSG 6850-4872'
Tagged TOC inside CSG w/ WL
CIBP @ 6850'
TOC @ 4956

7 " casing set at 5724 ' with 500 sx of _____ cement
Total Depth 5724 ' Hole size 8 3/4 " TOC by CALC
Perf ABO 6924-7319, 7522-7687 @ 3694'
50% efficiency


6924
7687
Liner
4 1/2 " casing set at 7699 ' with 400 sx of _____ cement
Total Depth 7700 ' Hole size 6 1/4 " Circulated

OPERATOR	APACHE CORP		DATE	6-4-2011
LEASE	JR Phillips	WELL NO.	1110 FNL & 1240 FCL	

Sec 1-20-36
Lea County

30-025-39148

producing Monument Padlock
6-2011

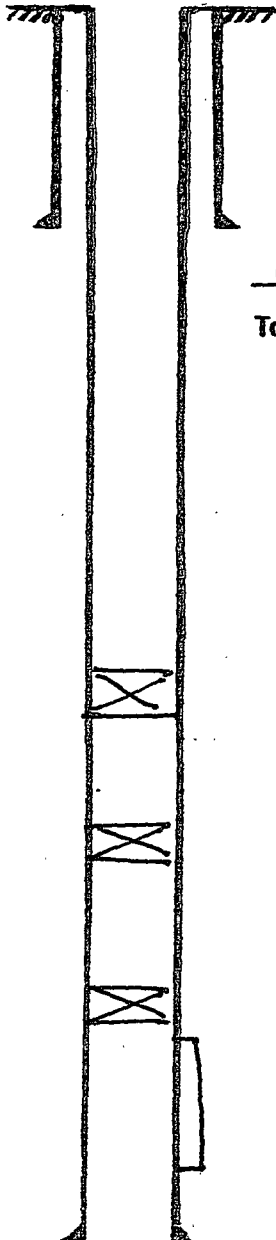

8 7/8" casing set at 1020 ' with 500 sx of _____ cement
Total Depth 1020 ' Hole size 12 1/4 " Circ

Perf 5248-5652 Padlock 2-2010

CIBP 5750

Perf 5820-6070

CIBP 6590

Perf 6708-6881 Drilled

CIBP @ 7000' + 3 SX cmt

Perf 7020-7596 ABO 8-2009

5 1/2" casing set at 7700 ' with 730 sx of _____ cement

Total Depth 7700 ' Hole size 2 7/8 " TOC Calc @

Recon SAY Cmt Circ.


5130'
50% efficiency

OPERATOR	APACHE CORP		DATE	6-4-2011
LEASE	State 0 #6	WELL No.	6	
		LOCATION	1880FNL + 1980FNL	

Sec 1-20-36
Lea County

30-0-25-04144

producing Monument Blinabay
6-2011

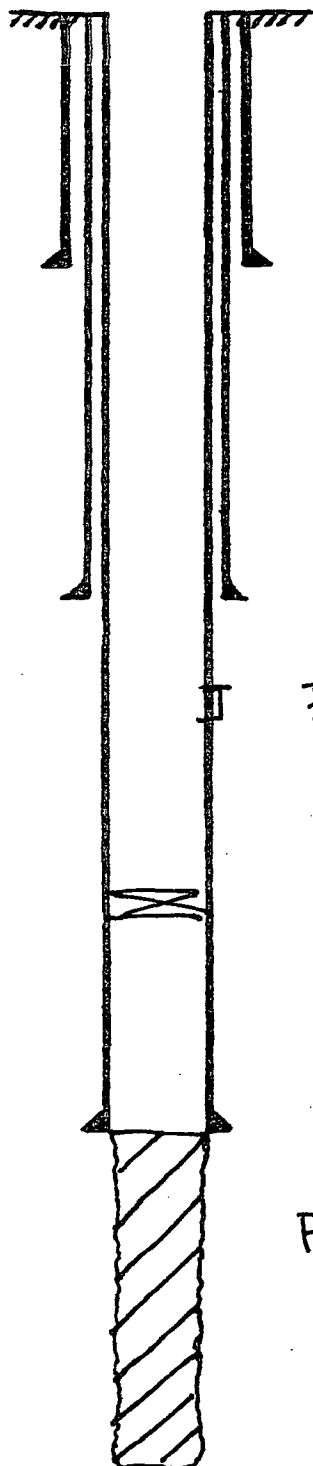

10³/₄ " casing set at 217 ' with 250 sx of _____ ceme
Total Depth 217 ' Hole size 15 " " Circ.

7⁵/₈ " casing set at 2547 ' with 1250 sx of _____ cemen
Hole size 9⁷/₈ "

Perf 5¹/₂ CGG 4430 SQZ w/ 150 SA 2-1949

Perf 5700-5730 12-1952

BP @ 5830

Perf 7170-7205 ABO

5¹/₂ " casing set at 7205 ' with 200 sx of _____ ceme
Total Depth 7877 ' Hole size 6³/₄ " TOC CALC @
5744'

PB OH to 7205
w/ 100 SX CMT


50% efficiency

30-025-12481

OPERATOR	Apache Corp		DATE	3-2-2008
LEASE	NMLSAU	WELL NO.	285	LOCATION F 1B30N + 19B0W

Section 36-19-36
Lea Co New Mexico

Eviee Monument 6B/SA

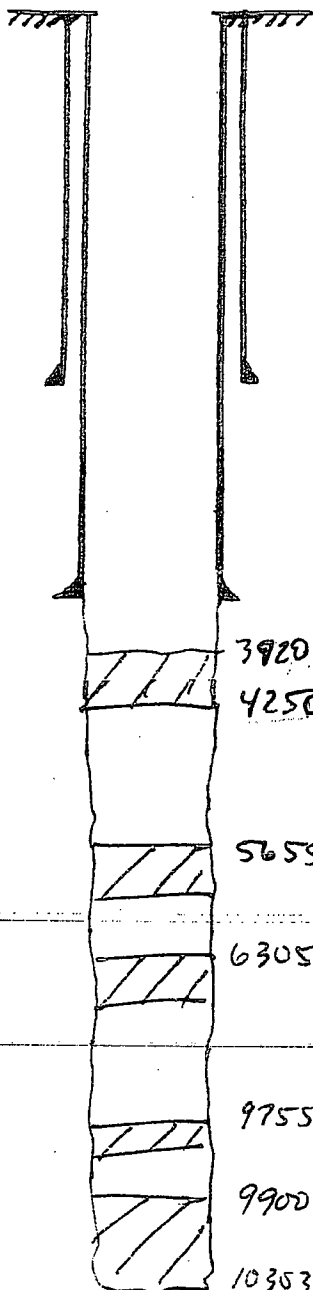

13 3/8" casing set at 1121 ' with 1125 sx of _____ cen
Hole size _____ " Circ

perf 3736 - 3749
OH 3749 - 3930

9 5/8" casing set at 3749 ' with 600 sx of _____ ceme

3920 Hole size 12 1/4 " TOC @ 2580 w/ 50% efficiency

4250

Drill out to 3920 PBTU

175 SX plug @ 3700 - 4250

5655

20 SX plug @ 5655 - 5700

6305

20 SX plug @ 6305 - 6350

9755

20 SX plug @ 9755 - 9800

9900

180 SX plug @ 9900 - 10303

10303

Total Depth 10305 ' Hole size _____ "

PBTU 3920


6-2011

30-025-20517

OPERATOR <u>Apache Corp</u>	DATE <u>3-1-2008</u>
LEASE <u>NM6SAU</u>	WELL No. <u>286</u>
LOCATION <u>6 1980N + 1830E</u>	

Sect 36-19-36
Lea County New Mexico

TA'D NM6SAU well until 4-2013
No perforations

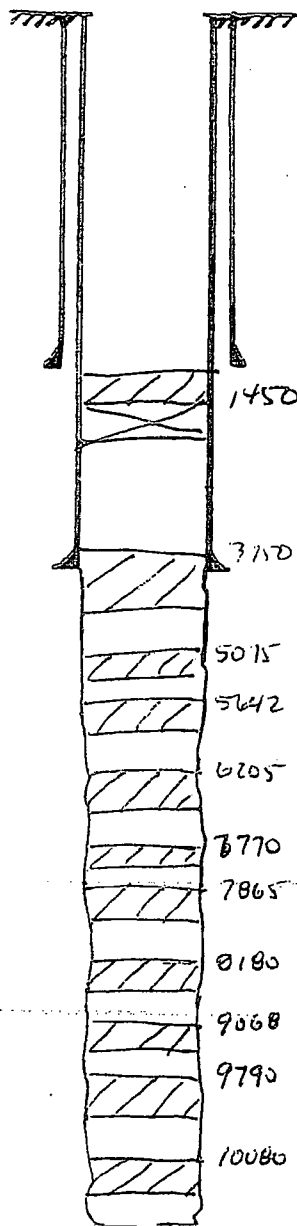

10 3/4" casing set at 1096' with 1050 sx of _____ cement

Cmt Ret @ 1450' + 4 SX cmt
perf 1510' Pump 400 SX5 Circ to Surface

7 5/8" casing set at 3750' with 600 sx of _____ cement

Hole size _____" TOC By Bmd Log @ 1750'

5075	35 SX plug @	3750 - 3840
5642	25 SX plug @	5075 - 5185
6205	25 " " "	5642 - 5752
	25 " " "	6205 - 6315
6770	25 " " "	6770 - 6880
7865	25 " " "	7865 - 7975
8180	25 " " "	8180 - 8290
9068	25 " " "	9068 - 9170
9790	25 " " "	9790 - 9900
10080	25 " " "	10080 - 10190

Total Depth 10306' Hole size _____"


PBTD 1450'

6-2011

Targa Midstream Services, L.P.

Spud: 3/21/2011
Start Injection:
GL: 3571'


Monument AGI Well # 1
Lea, NM
Section 36-T19S-R36E
662' FSL and 2513' FEL
API#: 30-025-43002

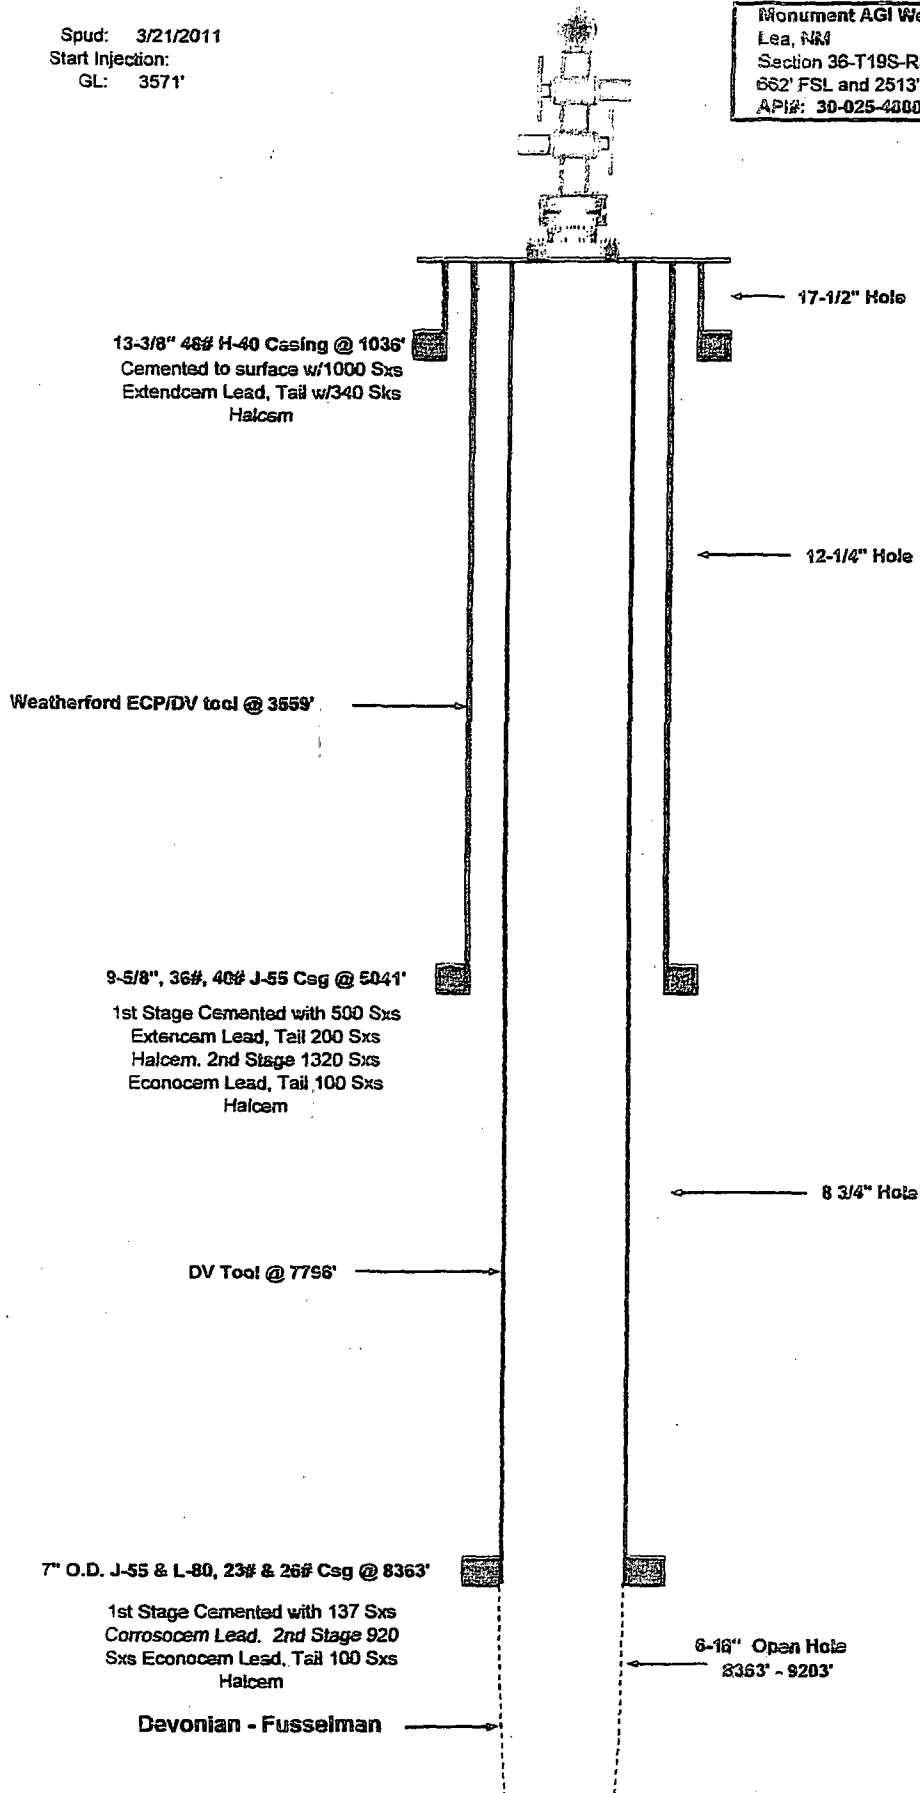

Targa Midstream Services, L.P.

Spud: 3/21/2011
Start Injection:
GL: 3571'

Monument AGI Well # 1
Lea, NM
Section 36-T19S-R36E
662' FSL and 2513' FEL
API#: 30-025-40002

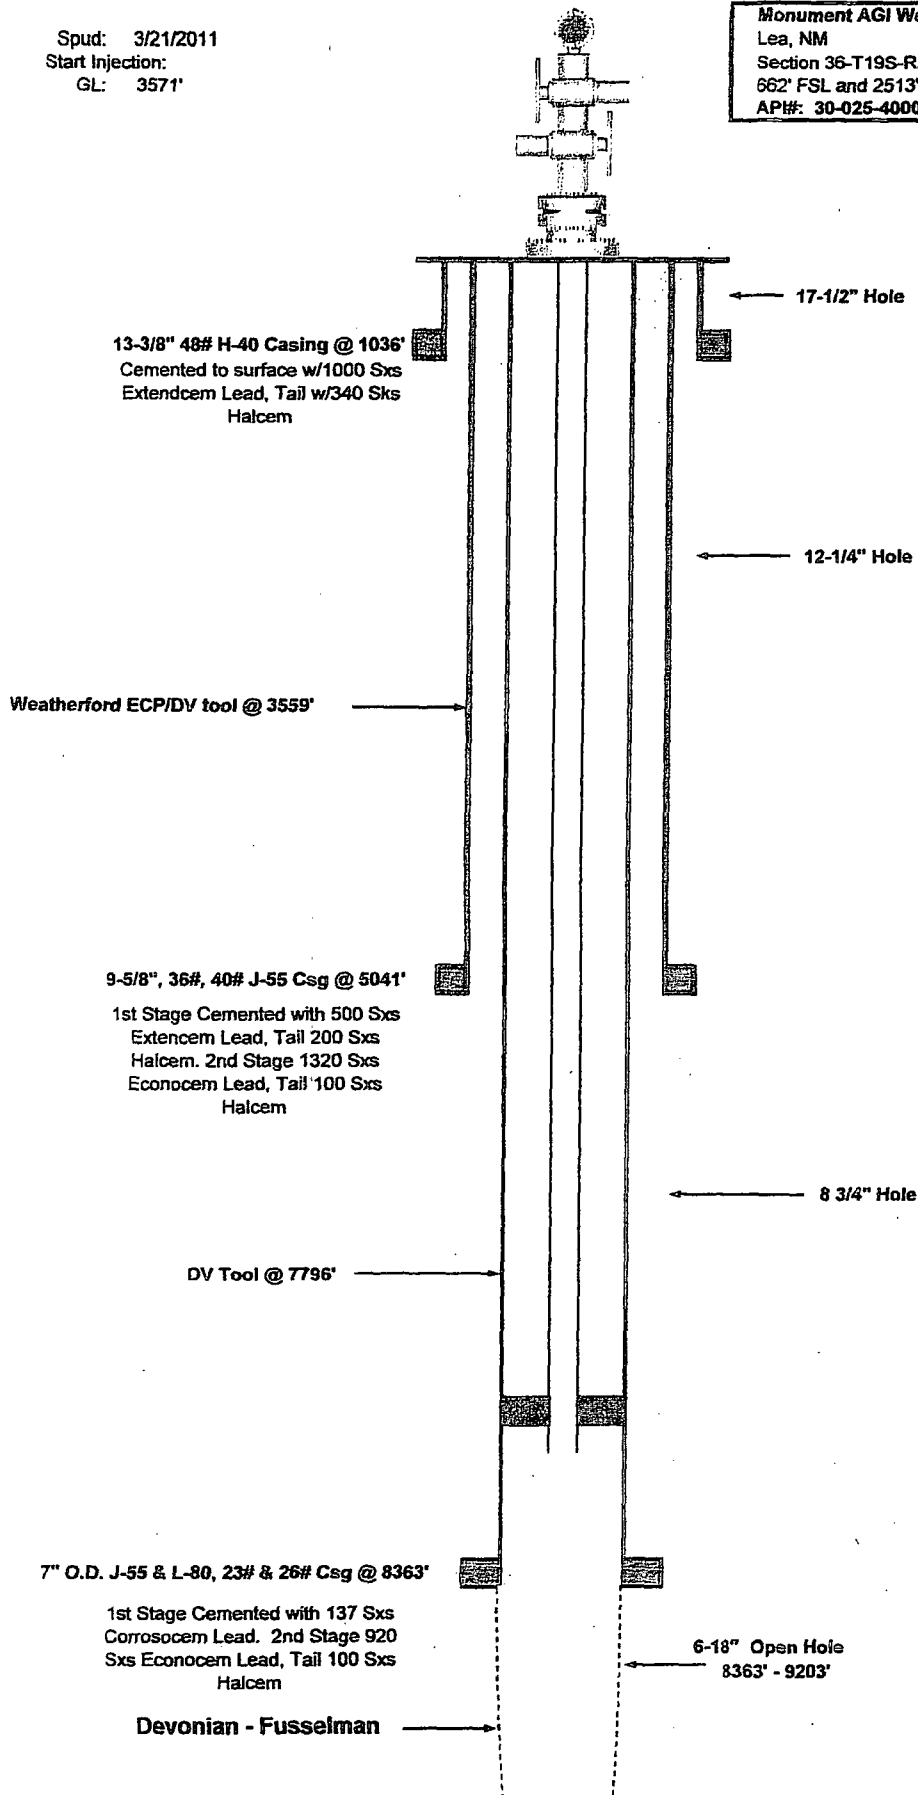


30-025-12473

OPERATOR APACHE CORPORATION	DATE 2-14-2008
LEASE State F Gas Com	WELL NO. S
	LOCATION Unit N 705 FSL + 1980 FWL

SEC 36-7195-R36E
Lea County NM

Active Summit-Yates-SR-Queen

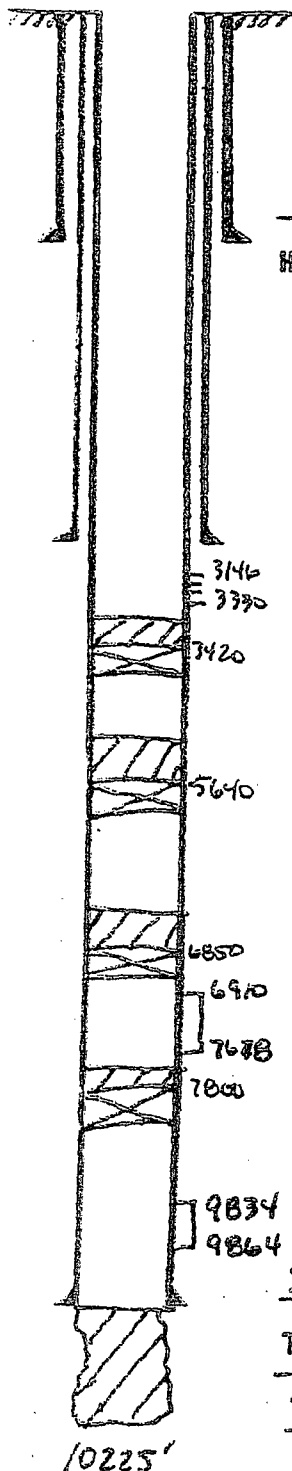

13 3/8" casing set at 187' with 210 sx of _____ cement
Hole size 17 1/2" Circulated

Perf 3146-3330

CIBP @ 3420 + 25 SX cmt PBTD 3400'

8 5/8" casing set at 2400' with 1300 sx of _____ cement
Hole size 11" TOC by TS @ 1226'

Perf 3579-3756 SQZ w/ 100 SX

SQZ CSL LEAK @ 4447-4478 w/ 100 SX

CIBP @ 5640 + 25 SX cmt

Perf 5691-5711 SQZ w/ 125 SX

Perf 5620-5712 SQZ w/ 150 SX

CIBP @ 6850 + 25 SX cmt

Perf 6910-7201, 7562-7678

CIBP @ 7800' + 1 SX cmt

Perf 9834-9864

Perf 9834-9920 SQZ w/ 100 SX

5 1/2" casing set at 9978' with 800 sx of _____ cement

Total Depth 10225' Hole size 7 3/4" TOC by
TS @ 4460. Perf 4460 SQZ w/ 700 SX
TOC by TS 2544'

PBTD 3400'


6-2011

30-025-12478

OPERATOR APACHE CORPORATION		DATE 2-14-2008	
LEASE NMCSAU BIK 14	WELL NO. 32	LOCATION UNIT A	660' FSL + 660' FEL
SOC 36-T195-R36E			

TA'D well 7-12
Monument GB/SA

Spot SO SX 3315 - 3007

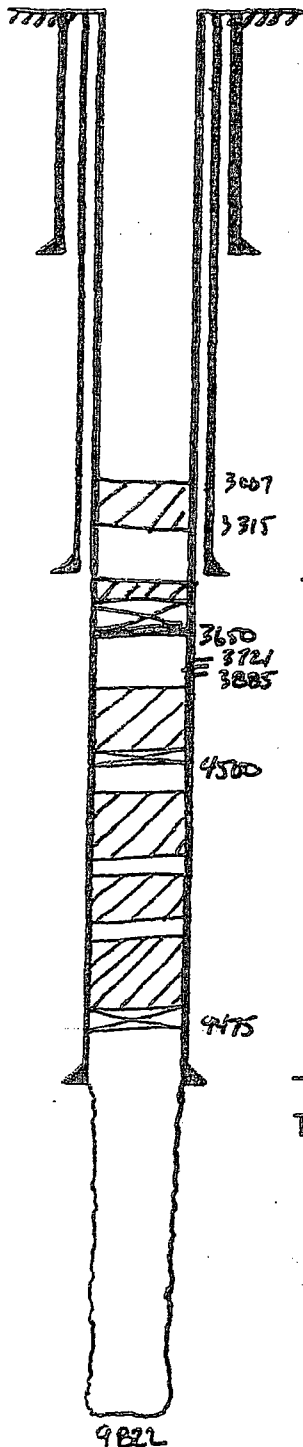

13 3/8" casing set at 302' with 300 sx of _____ ce

Total Depth 302' Hole size 17 1/2" Circulated
4-2001 set CIBP @ 3650' + 14' cmt SQZ CSG
LEAK @ 3488 - 3519 w/ SO SX

Perts 3721 - 3885

CIBP @ 4500' + 35 SX cmt.

9 5/8" casing set at 2787' with 1300 sx of _____ cen

Hole size 12 1/4" TOC by TS @ 1205'

perf 7" @ 4574 w/ 4 SHOTS, cmt w/
365 SXS. TOC by TS @ 2880'

perf 5710 - 5745 SQZD w/ 50 SX

perf 7160 - 7277 SQZD w/ 100 SX

perf 7590 - 7670 SQZD w/ 3 SX

CSG LEAK @ 6308 - 6268 SQZD w/ 186 SX

100' plug @ 6801 - 6901

100' plug @ 5065 - 5165

7" casing set at 9785' with 500 sx of _____ cen

Total Depth 9822' Hole size 8 5/8" TOC by TS @
4630'

CIBP @ 9475 + 35 SX cmt.

perf 9501 - 31

perf 9752 - 54

OH 9785 - 9822'


PBTD 3007
6-2011

30-025-05780

OPERATOR Hess	(ALCO)	DATE 2-14-2008
LEASE J. L. Phillips	WELL NO. 8	LOCATION Unit #1 660' FSL + 942' FSL

Sec 31-T19S-R37E
LEA CO NM

AAA 4-98

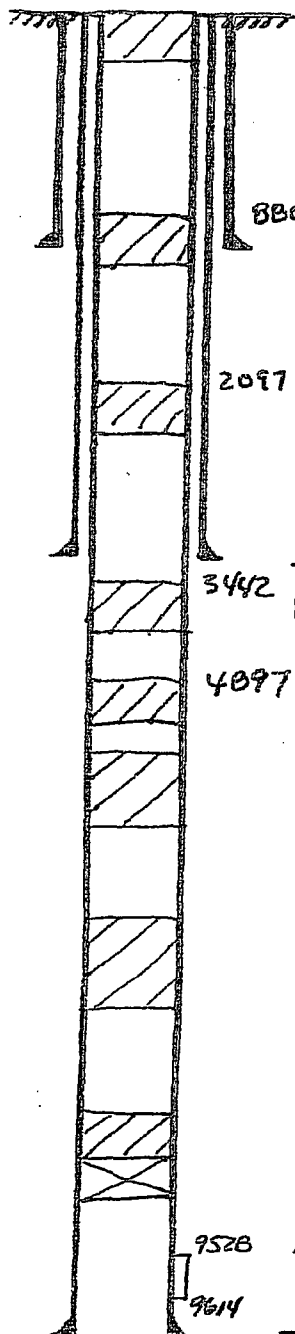

Spot 10 SK @ 81'-0

880 13 7/8 net @ 981' w/ 900 SK
17 1/2" hole size Circulated

Spot 25 SK @ 1003-880
2097 Spot 25 SKS @ 2300-2097
Spot 25 SKS @ 3645-3442
Spot 25 SKS @ 5100-4897

9 5/8" casing set at 2950' with 1500 SK of cement
3442 Hole size 12 1/4" Circulated

4097

CSG Leak @ 5778-6111 582 w/
750 SK
resize w/ 50 SK

35 SK plug @ 5742-6110

35 SK plug @ 7652-8020

CIBP @ 9475' + 25' cement

perf 9528-9614

9528

9614

5 1/2" casing set at 9899' with 972 SK of cement

Total Depth 9899' Hole size 8 3/4" DV @ 5808

DV tool failed perf 5 1/2 @

9818-20 582 w/ 500 SK
TOC 6280' BY TS


1st 570 SK TOC 6280'
2nd 472 SK TOC 300'
BY TS

30-025-04134

OPERATOR APACHE CORPORATION	DATE 2-14-2008
LEASE J. R. Phillips	WELL NO. 5
LOCATION Unit A 660' FNL ± 660' FEL	

SEC 1-T205-R36E
LEA CO NM

Active Monument ABO

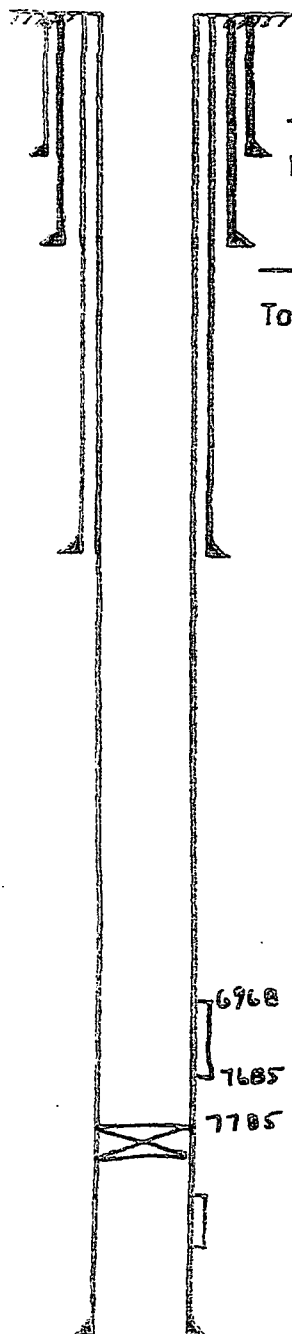

16 " casing set at 169 ' with 300 sx of _____ cement
Hole size 24 " Circulated

11 3/4 casing set at 2419 ' with 2050 sx of _____ cement
Total Depth 2419 ' Hole size 15 " Circulated

SQZ CSG LAK @ 5159-5191 w/ 100 SX 7/98

8 5/8 " casing set at 5121 ' with 1250 sx of _____ cement
Hole size 10 5/8 " TOC by TS @ 2048'

perf	5180-5200	}	SQZ w/ 150 SX
perf	5215-5218		
perf	5595-5600	}	SQZ w/ 50 SX
perf	5600-5610		
perf	5215-5220		SQZ w/ 50 SX
perf	5660-5715		SQZ w/ 75 SX
perf	7070-7110		SQZ w/ 98 SX
perf	7110-7164	}	SQZ w/ 125 SX
perf	7190-7230		
perf	7645-7665	}	SQZ w/ 135 SX
perf	7665-7690		
perf	6968-7685		

CIBP @ 7785

perf 9610-9870

5 1/2 " casing set at 9941 ' with 1500 sx of _____ cement
Total Depth 9941 ' Hole size 7 3/4 " TOC by Calc

@ 4313 w/ 50% Efficiency

PBTD 7785

6-2011