



January 9, 2011

VIA HAND DELIVERY

Mr. Daniel Sanchez
Acting Director
Oil Conservation Division
New Mexico Department of Energy,
Minerals and Natural Resources
1220 South Saint Francis Drive
Santa Fe, New Mexico 87505

RECEIVED OOD
2011 JAN 10 AM 11:08

Re: **Oil Conservation Division Case 14593:** Amended Application of Chevron U.S.A., Inc.
for approval of a salt water disposal well, Eddy County, New Mexico.

Dear Mr. Sanchez:

Enclosed is are schematic Drawings for each plugged and Abandoned well with in the area of review for the Skelly Unit Well No. 902 which is the subject of this application. These Schematic drawings were accidentally omitted from the Amended application filed in this case on January 3, 20011. The hearing on this application will be February 3, 2011.

Your attention to this matter is appreciated.

Very truly yours,

William F. Carr
Ocean Munds-Dry
Attorneys for Chevron U.S.A., Inc.
Enclosures

cc: Oil Conservation Division
District II
1301 W. Grand Avenue
Artesia, New Mexico 88210

Mr. Edgar Acero
Production Engineer
Chevron North America Upstream
Exploration and Production Company
15 Smith Road
Midland, Texas 79705

Well: Foran State #1

Field: Grayburg-Jackson-SR-Q-G-SA

Reservoir: 7RVS Q-G-SA

Location:

2310' FNL & 330' FEL
Section: 16
Township: 17S
Range: 31E Unit: H
County: Eddy State: NM


Elevations:

GL: 3860'
KB:
DF:

Log Formation Tops

Tansill	
Yates	
Seven Rivers	
Queen	
Grayburg	3110'
San Andres	3430'
Glorieta	
Tubb	
Abo	
Wolfcamp	
Strawn	
Atoka	
Morrow	

Current Wellbore Diagram

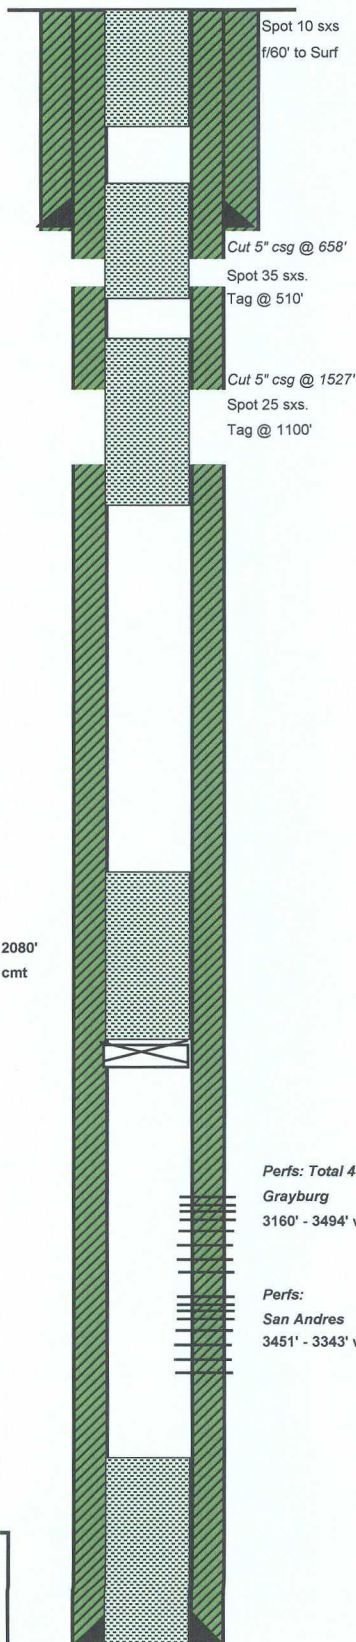

Well ID Info:

Chevno: NA
API No: 30-015-26098
Operator: Marbob Energy Corp
Spud Date: 4-24-89
Rig Released: 7/29/89
Compl. Date: 8/22/89

Surface Csg: 8-5/8", 23#

Set: @ 611' w/ 425 sx cmt
Hole Size: 12-1/4"
Circ: Yes TOC: Surface
TOC By: Circulation (Trace)

Initial Completion:

Perf'd in Grayburg-Jackson-SR-Q-GR-SA formation. 3451'-3494' & 3160'-3343'.
Acidz w/6500 gals, 15% NE, and frac w/60,000 gals gell 2% KCL wtr. & 110,000# sd.
Subsequent Work
6-18-97 CO and RTP, 2-7/8" tbg set @ 3216'
4-12-2000 P&A'd

Prod. Csg: 5" 15#

Set: @ 3796' w/975 sx cmt
Hole Size: 7-7/8" to
Circ: yes TOC: Surface
TOC By: Circulation (25 sxs)

TD: 3844' COTD: PBTD: 3660'

Updated: 1-4-11

By: Chay

Well: Mobil State # 1

Field: Grayburg Jackson

Reservoir: Grayburg - San Andres

Location:

2310' FNL & 990' FEL
Section: 15
Township: 17S
Range: 31E Unit: H
County: Eddy State: NM


Elevations:

GL: 3870'
KB:
DF:

Log Formation Tops

Base/Salt	
Yates	
Seven Rivers	
Queen	
Grayburg	
San Andres	3228'
Glorieta	
Tubb	
Abo	
Wolfcamp	
Strawn	
Atoka	
Morrow	

**Current
Wellbore Diagram**

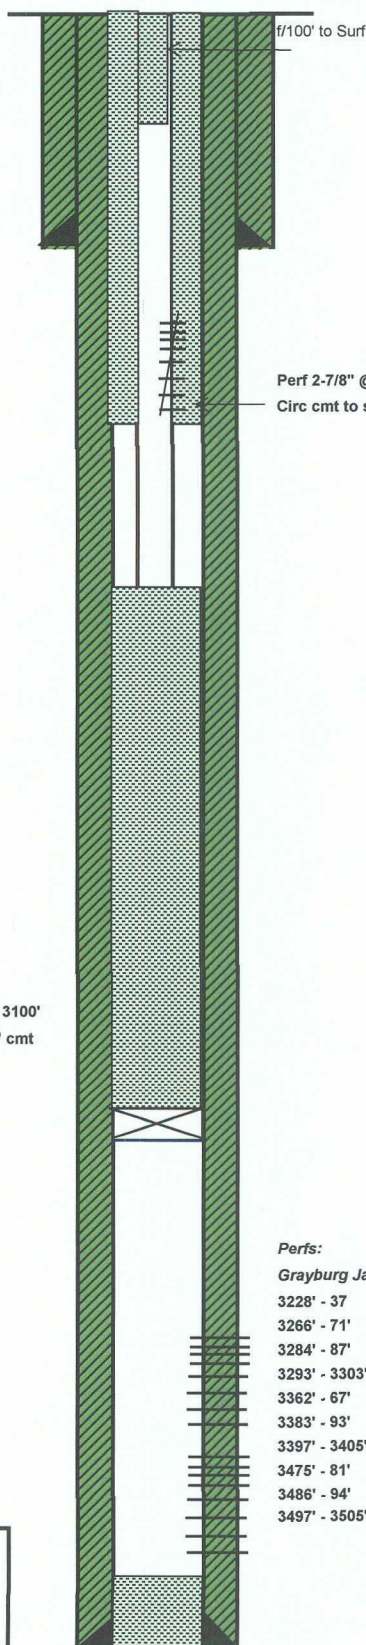

Well ID Info:

Chevno: FC5816
API No: 30-015-05174
Operator: H & W Enterprises
Spud Date: 6-17-37
Rig Released:
Compl. Date: 9-10-37

Surface Csg: 8-5/8", 28#

Set: @ 630' w/ 50 sx cmt
Hole Size: 11" to 630'
Circ: Yes TOC: Surface
TOC By: Circulation

Initial Completion:

Orig drill: 9-10-37. TD: 3290'

Subsequent Work

4-3-50: Mudded hole, Set 5 sx cmt bridge. Cut csg @ 1250' & pull'd, & cut 85/8" csg @ 106', pull'd. Mudded to Surface.

Major W/O: 1960 TD: 3738'

Spud 10-7-60, Complete: 10-23-60; Grayburg San Andres formation.

Perfs: 3228'-37', 3266'-71', 3284'-87', 3293'-3303', 3362'-67', 3383'-93', 3397'-3405', 3475'-81', 3486'-94', 3497'-3505'. Acdz & Frac.

5-17-97 P&A'd

Perf 2-7/8" @ 1407'. Circ cmt to surf between 2-7/8" & 7"

Perfs:

Grayburg Jackson

3228' - 37'
3266' - 71'
3284' - 87'
3293' - 3303'
3362' - 67'
3383' - 93'
3397' - 3405'
3475' - 81'
3486' - 94'
3497' - 3505'

Prod. Csg: 7", 20# csg
Set: @ 3290' w/50 sx cmt
Hole Size: 8-5/8" to 3290'
Circ: yes TOC: Surface
TOC By: Circulation

TD: 3738' PBTD: 3529'

Updated: 1-5-11

By: Chay

Well: Shell State # 1

Field: Grayburg Jackson

Reservoir: Grayburg -Jackson

Location:

330' FNL & 330' FEL
Section: 16
Township: 17S
Range: 31E Unit: A
County: Eddy State: NM


Elevations:

GL:
KB:
DF: 3876'

Log Formation Tops

Base/Salt	
Yates	
Seven Rivers	2190'
Queen	2730'
Grayburg	3160'
San Andres	3500'
Glorieta	
Tubb	
Abo	
Wolfcamp	
Strawn	
Atoka	
Morrow	

**Current
Wellbore Diagram**

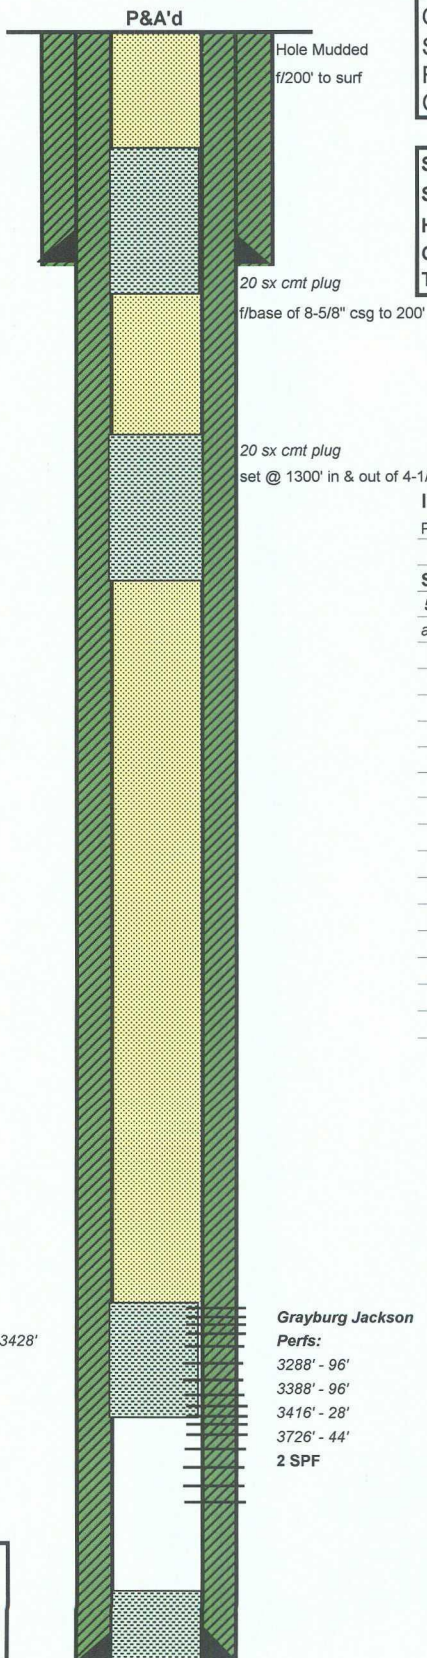

Well ID Info:

Chevno: FC5808
API No: 30-015-05166
Operator: Kersey & Company
Spud Date: 7-15-60
Rig Released:
Compl. Date: 9-25-60

Surface Csg: 8-5/8", 28#

Set: @ 677' w/ 50 sx cmt
Hole Size: 10" to 677'
Circ: Yes TOC: Surface
TOC By: Circulation

Initial Completion:

Perfs: 3726' - 44', 2 SPF, Trt w/ 380 bbls gelled oil, slick oil & 40,000# sd.

Subsequent Work

5-25-65: P&A'd, as shown on diagram. Hole was mudded between all plugs and the marker set in cmt @ the surface.

Prod. Csg: 4-1/2", 9.5# csg
Set: @ 3775' w/325 sx cmt
Hole Size: 8" to 3778'
Circ: yes TOC: Surface
TOC By: Circulation

TD: 3778' PBTD:

Updated: 1-5-11

By: Chay

Well: Skelly Unit # 151

Field: Fren

Reservoir: 7RVS

Location:

2310' FSL & 1980' FWL
 Section: 15
 Township: 17S
 Range: 31E Unit: K
 County: Eddy State: NM


Elevations:

GL: 3867'
 KB:
 DF:

Log Formation Tops

Base/Salt	1640'
Yates	1798'
Seven Rivers	2114'
Queen	
Grayburg	
San Andres	
Glorieta	
Tubb	
Abo	
Wolfcamp	
Strawn	
Atoka	
Morrow	

Current
Wellbore Diagram

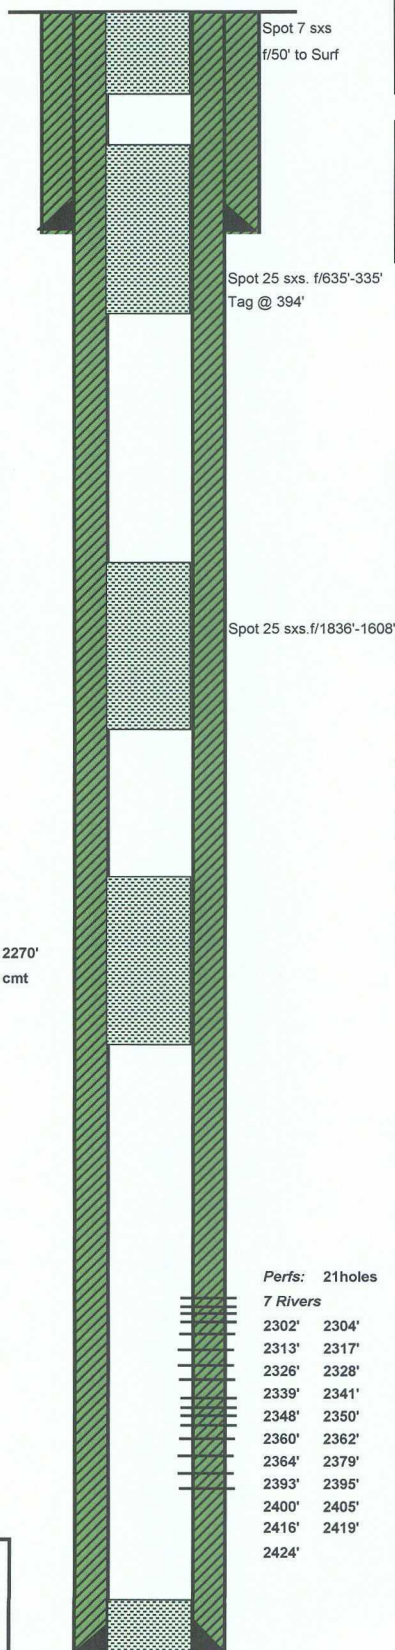**Well ID Info: BLM**

Chevron: NA
 API No: 30-015-22494
 Operator: Chevron
 Spud Date: 6-8-78
 Rig Released: 6-17-78
 Compl. Date: 6-30-78

Surface Csg: 8-5/8", 24#, K-55

Set: @ 582' w/ 275 sx cmt
 Hole Size: 11" to 570'
 Circ: Yes TOC: Surface
 TOC By: Circulation 28 sxs

Initial Completion:

Perfs: 2302-2395' & 2400'-2424' in the 7Rvs formation. Acdz w/3250 gals 15% f
 34 ball sealers, 38,514 gals 2% KCL & 21,672# 100 mash sd.
 37,800 # 20/40 sd, 84 gals scale inhib & 2 ball sealers

Subsequent Work

P&A'd 9-25-90

Cmt Retainer on 2-3/8" tbg @ 2270'
 Top w/25' cmt

Prod. Csg: 5-12" 15.5#
 Set: @ 2599' w/650 sx cmt
 Hole Size: 7-7/8" to 2600'
 Circ: yes TOC: Surface
 TOC By: Circulation

TD: 2600" PBTD: 2557'

Updated: 1-4-11

By: Chay

Well: Skelly Unit # 152

Field: Fren

Reservoir: 7RVS

Location:

1830' FSL & 660' FWL
Section: 15
Township: 17S
Range: 31E Unit: L
County: Eddy State: NM


Elevations:

GL: 3865'
KB: 3875'
DF:

Log Formation Tops

Base/Salt	1600'
Yates	1750'
Seven Rivers	2100'
Queen	
Grayburg	
San Andres	
Glorieta	
Tubb	
Abo	
Wolfcamp	
Strawn	
Atoka	
Morrow	

**Current
Wellbore Diagram**

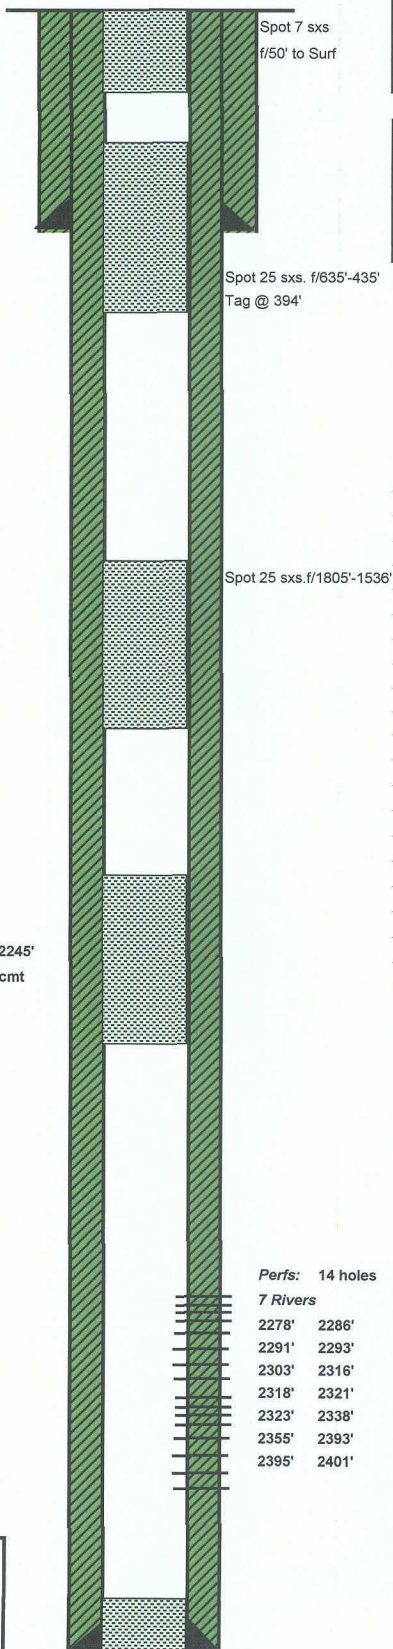

Well ID Info: BLM

Chevno: NA
API No: 30-015-22495
Operator: Chedvron
Spud Date: 7-22-78
Rig Released: 7-26-78
Compl. Date: 8-4-78

Surface Csg: 8-5/8", 23#, K-55

Set: @ 569' w/ 275 sx cmt

Hole Size: 11" to 570'

Circ: Yes TOC: Surface

TOC By: Circulation 20 sxs

Initial Completion:

Perfs: 2278'-2401' in the 7Rvs formation. Acdz w/4500 gals 15% FE & 28 ball sealers, 37,170 gals 2% KCL & 48,300 # 20/40 sd.

Subsequent Work

P&A'd 9-28-90

Cmt Retainer on 2-3/8" tbg @ 2245'
Top w/25' cmt

Prod. Csg: 5-12" 15.5 & 14# K-55 R-3
Set: @ 2549' w/550 sx cmt
Hole Size: 7-7/8" to 2550'
Circ: yes TOC: Surface
TOC By: Circulation 45 sxs

TD: 2549' PBTD: 2508'

Updated: 1-4-11

By: Chay

Well: Skelly Unit # 153

Field: Fren

Reservoir: Seven Rivers

Location:

2080' FNL & 1880' FEL
 Section: 15
 Township: 17S
 Range: 31E Unit: G
 County: Eddy State: NM


Elevations:

GL: 3881'
 KB: 3890'
 DF:

Log Formation Tops

Base/Salt	1670'
Yates	1826'
Seven Rivers	2150'
Queen	
Grayburg	
San Andres	
Glorieta	
Tubb	
Abo	
Wolfcamp	
Strawn	
Atoka	
Morrow	

Current
Wellbore Diagram

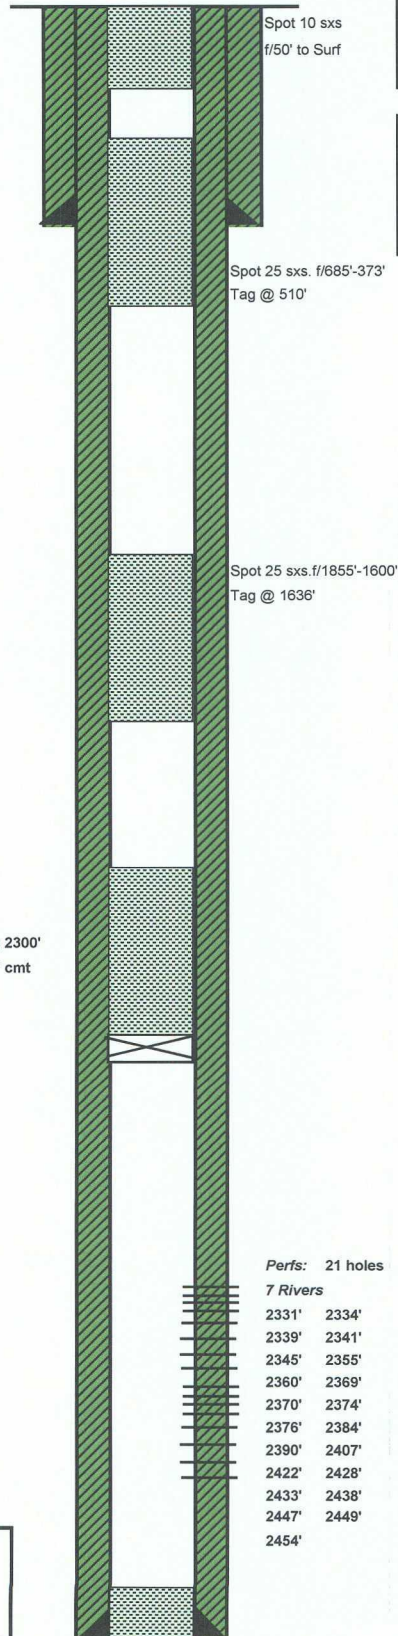**Well ID Info: BLM**

Chevno: NA
 API No: 30-015-22531
 Operator: Chedvron
 Spud Date: 8/2/78
 Rig Released: 8/5/78
 Compl. Date: 9/6/78

Surface Csg: 8-5/8", 23#, 8rd ST&C

Set: @ 631' w/ 275 sx cmt
 Hole Size: 11" TO 632'
 Circ: Yes TOC: Surface
 TOC By: Circulation

Initial Completion:

Perfs: 2331'-2454' in the 7Rvs formation. Acdz w/3150 gals 15% & 42 ball sealers, 41,000 #
 gell 2% KCL, & 48,300 20/40 sd & 11 ball sealers.

Subsequent Work

P&A'd 11-9-90

Prod. Csg: 5-12" 15.5 & 14# K-55

Set: @ 2629" w/650 sx cmt
 Hole Size: 7-7/8" to 2630'
 Circ: yes TOC: Surface
 TOC By: Circulation

TD: 2630" COTD: PBD: 2586'

Updated: 1-4-11

By: Chay