




PAN-AM
Horton #13
Elev. 4222

PAN-AM
Horton #15
Elev. 4221

PAN-AM
Horton #31
Elev. 4221

WEST
B

EAST
B'

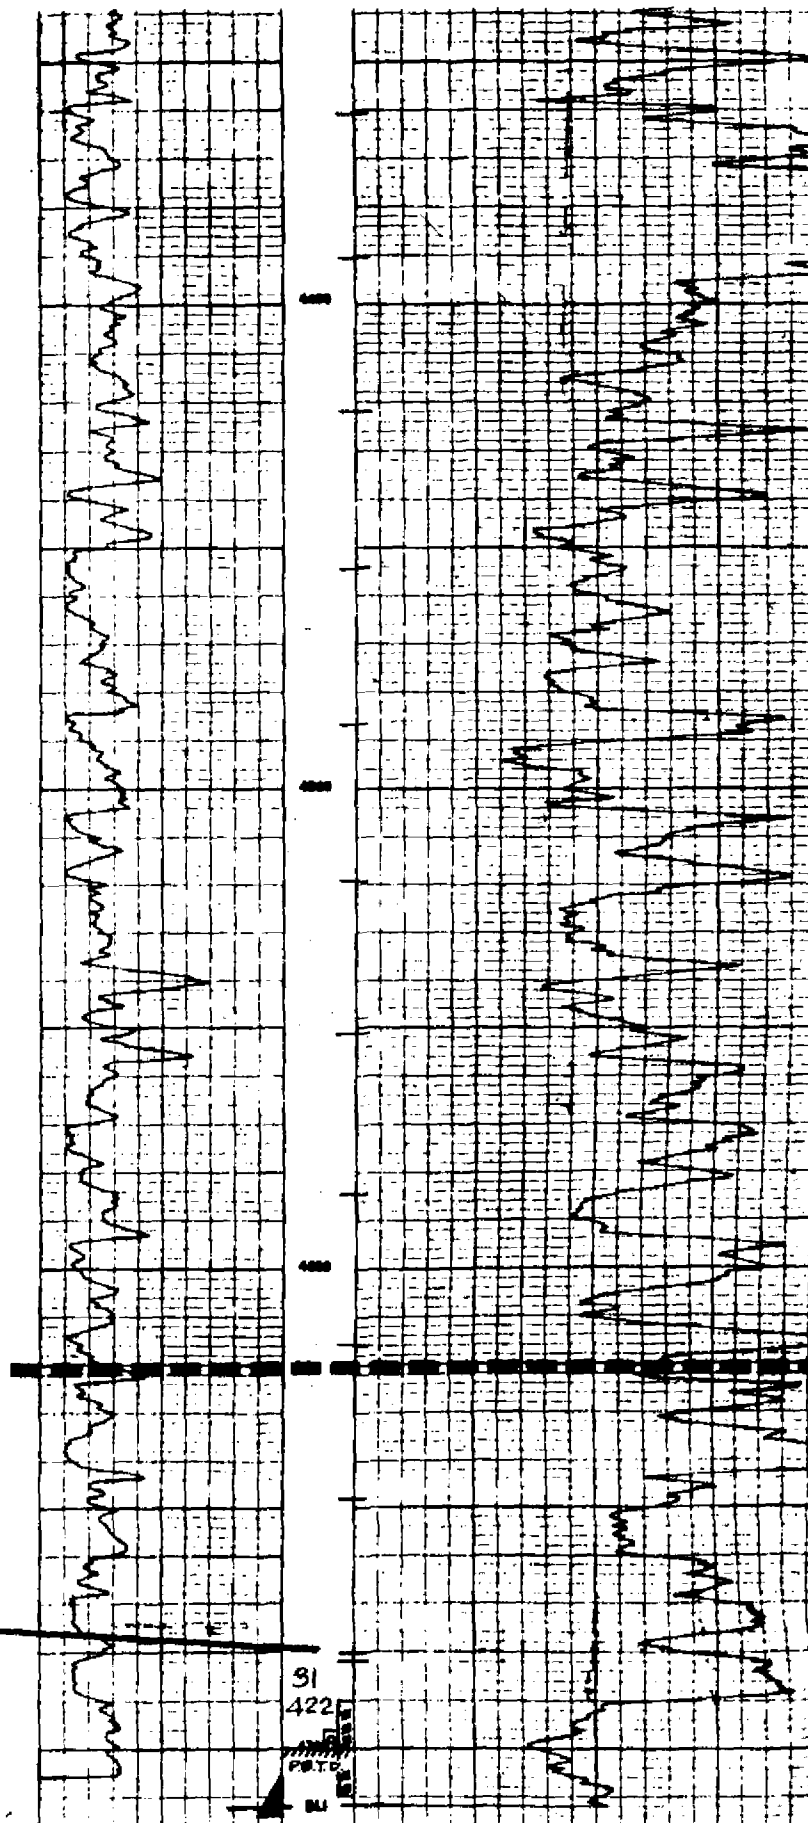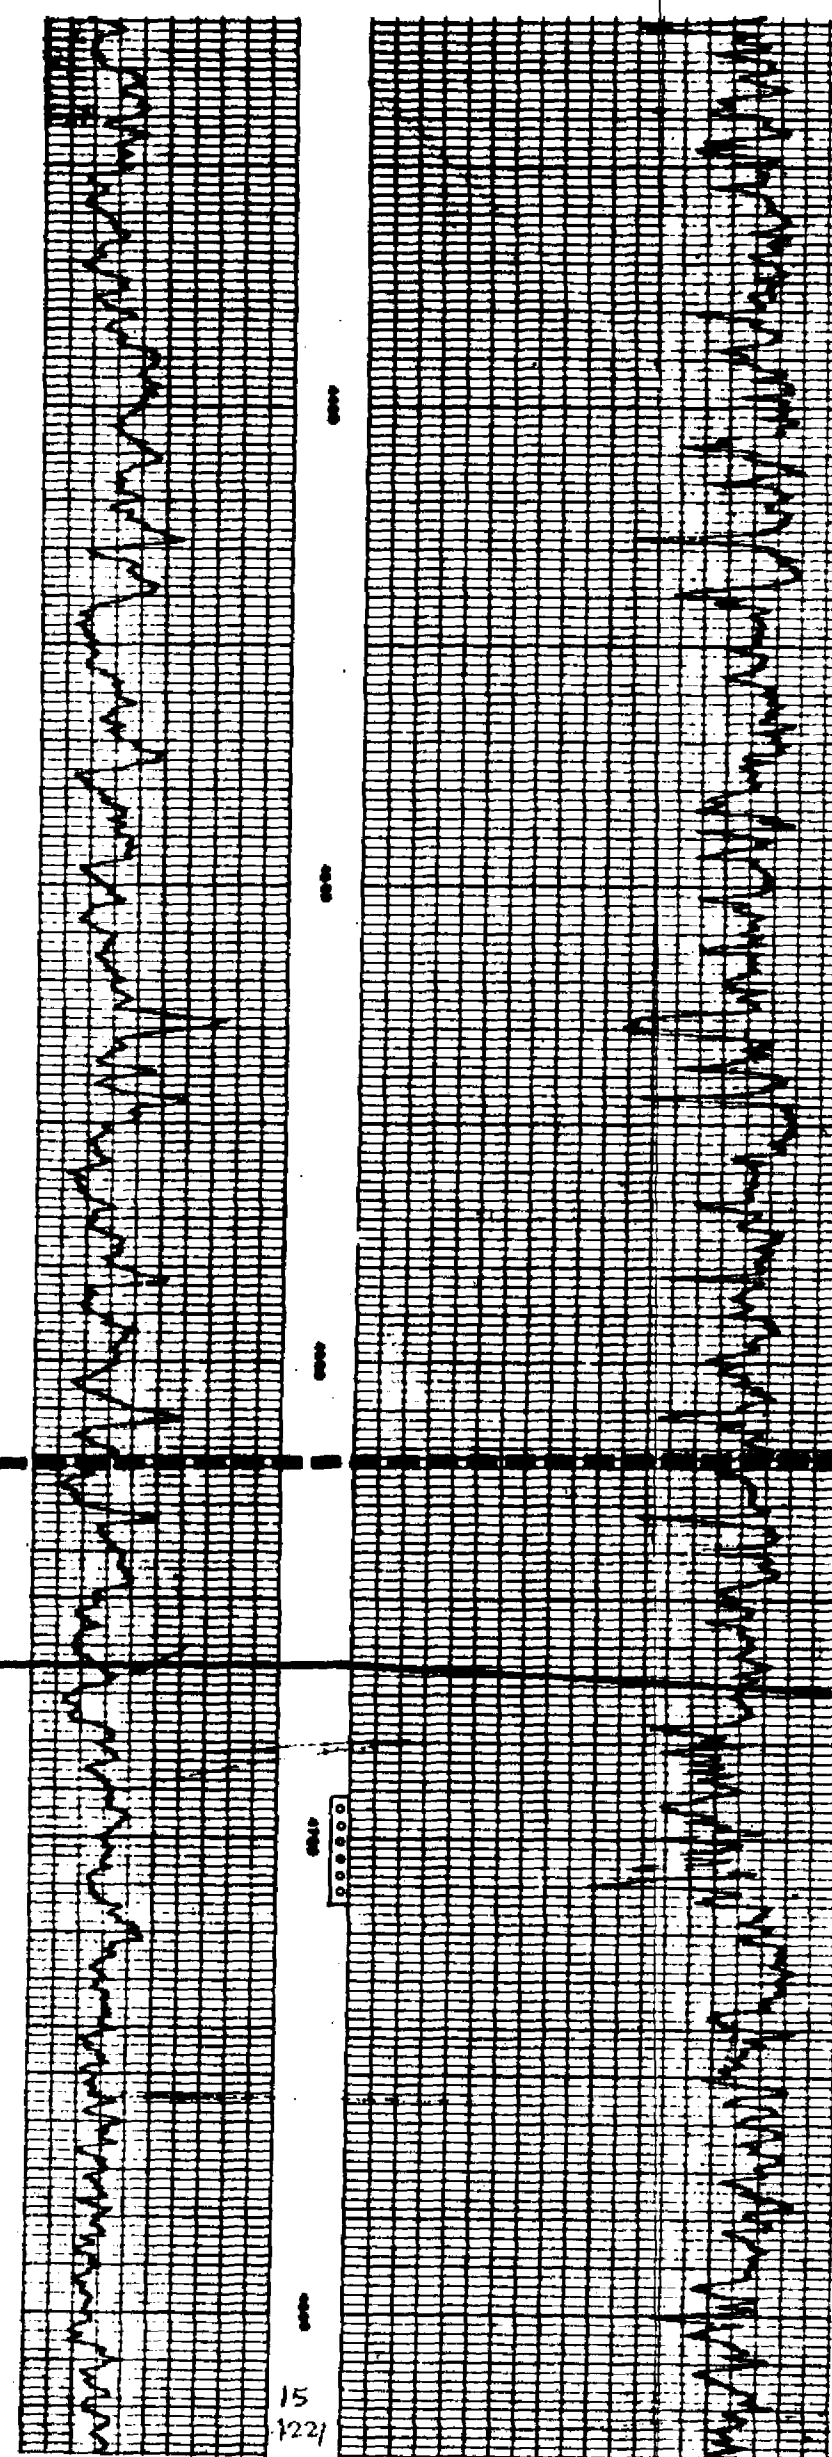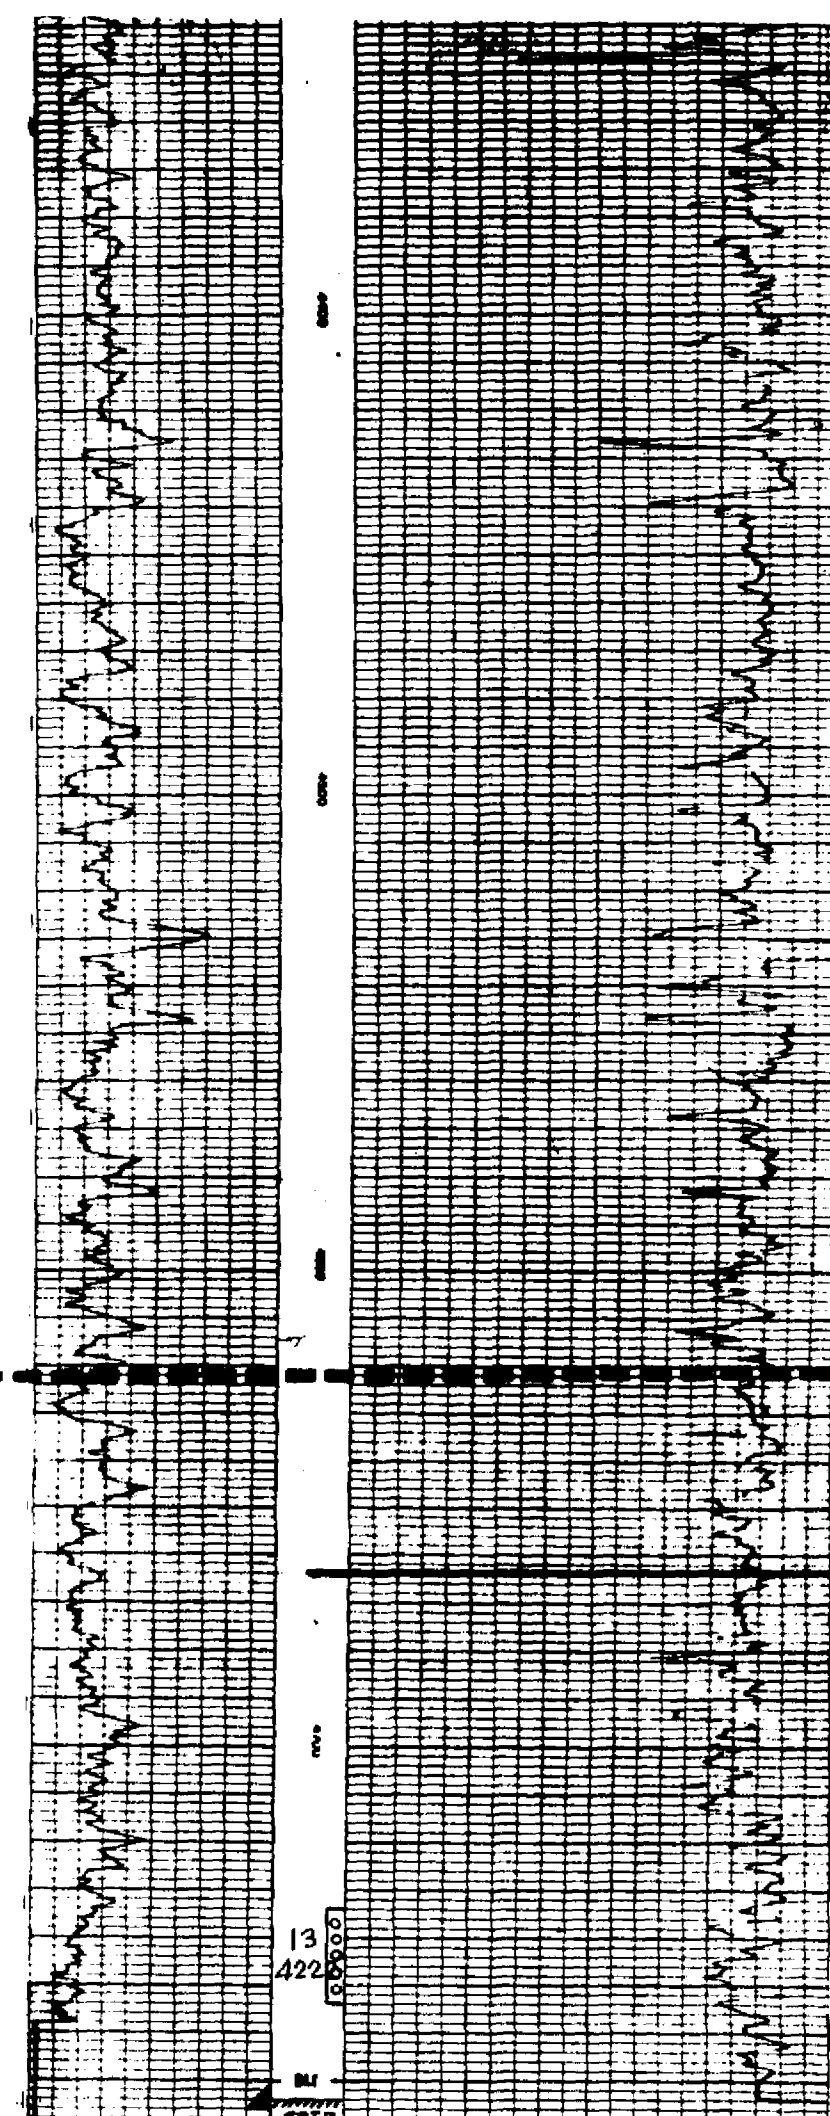

WEST-EAST
B-B'
Exhibit No. 6

STRUCTURAL CROSS SECTION
PAN AMERICAN PETROLEUM CORPORATION
LUBBOCK DISTRICT
MILNESAND POOL
ROOSEVELT Co., NEW MEXICO

SCALE: VERTICAL 1" = 40'
HORIZONTAL 1" = 200'

No. 13

TD 4776' PBD 4774
4 1/2" CSA 4776'

1. Perf 4734' - 54' w/2 SPF, ACD x 750 gal.
Swb 54 BO, 30 BW in 7 Hrs.
Calc 24 Hr. Rate; 186 BO, 97 BW
COR NA

Date Compl: 9-28-64

No. 15

TD 5396' PDB 5270'
4 1/2" CSA 5396

1. Perf 5320-40 W/2 SPF, Acd x 1000 gal.
No show of oil or gas.
2. Perf 5304 - 14' w/2 SPF, Acd x 6000 gal.
No show of oil or gas. Set cast iron bridge plug
at 5290' and capped with 20' cement.
3. Perf 4691-4714 w/2 SPF, Acd x 100 gal.
IPF 103 BO, OBW in 24 Hr. thru 8/64" choke

COR 954
Date Completed: 9-11-64

No. 31

TD 4714' PBD 4700'
4 1/2" CSA 4714

1. Perf 4690-4710 w/2 SPF, Acd x 750 gal.
No show of oil or gas, squeezed w/200 SX.
PBD 4700'

2. Perf 4696-4700 w/2 SPF. Acd x 800 gal.
No show of oil or gas.

Temporarily abandoned 5-6-65