

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

OCD - REC'D 8/9/2020

Form C-103
Revised July 18, 2013

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-005-61498
1. Type of Well: Oil Well ☐ Gas Well ☒ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator GRIZZLY OPERATING, LLC		6. State Oil & Gas Lease No.
3. Address of Operator 5847 SAN FELIPE, STE. 3000, HOUSTON, TEXAS, 77057		7. Lease Name or Unit Agreement Name PAULETTE PV STATE
4. Well Location Unit Letter <u>K</u> : <u>1,980</u> feet from the <u>SOUTH</u> line and <u>1,980</u> feet from the <u>WEST</u> line Section <u>26</u> Township <u>04S</u> Range <u>24E</u> NMPM County <u>CHAVES</u>		8. Well Number <u>3</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4,031' GR		9. OGRID Number 258350
		10. Pool name or Wildcat PECOS SLOPE; ABO

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Notify OCD 24 hours prior to MIRU to P&A.
2. Set CIBP @ 3,578'. Tag w/ tbg. Circ MLF, test csg. Spot 25 sx "C" on top of CIBP. WOC & tag.
3. Perf @ 1,649' & sqz 50 sx "C" 1,549-1,649'. WOC & tag. (Glorieta)
4. Perf @ 939' & sqz 175 sx "C" 589-939'. WOC & tag. (8-5/8" shoe & San Andres)
5. Perf @ 100' & circ cmt to surf via 4-1/2" x 8-5/8" csg ann. Verify cmt to surf behind both strings.
6. RD P&A equipment. Cut off wellhead. Install dry hole marker. Clean location and move off.

API and WELL NAME

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Kyle Zimmermann TITLE Operations Engineer DATE 08/09/2020

Type or print name Kyle Zimmermann E-mail address: kzimmerman@grizzlyenergylc.com PHONE: 432-202-0145
For State Use Only

APPROVED BY: **DENIED** DATE _____
Conditions of Approval (if any):

LEASE/WELL: REDMAN OY STATE #6
LOCATION 1,980' FSL & 1,980' FWL
K- SEC 26-T04S-R24E
CO/ST: CHAVES COUNTY, NEW MEXICO
FIELD: PECOS SLOPE, ABO
API NO. 30-005-61498

GR 4031
SPUDDED 3/31/1982
COMPLETED 4/27/1982
LAT 33 9286842
LONG -104.395134

FORMATION TOPS PER C-105
SAN ANDRES 643
GLORIETA 1599
FULLERTON 2964
ABO 3576

CURRENT

20" CONDUCTOR

12-1/4" HOLE

8-5/8" 24# J-55
CMT W/ 700 SX. CIRC.

7-7/8" HOLE

4-1/2" 9.5# J-55 LT&C
CMT W/ 350 SX.



ABO PERFS: 3,628-3,885' (20 HOLES)
-ACIDIZE W/ 3,000 GALS 7.5%
-FRAC W/ 1,500 GALS 7.5% ACID, 40,000 GALS GELLED KCL & 80,000# 20/40 SAND

4,031'

PBTD: 3,978'
TD: 4,040'

KDZ 08-09-2020

LEASE/WELL: REDMAN OY STATE #6
LOCATION 1,980' FSL & 1,980' FWL
K- SEC 26-T04S-R24E
CO/ST: CHAVES COUNTY, NEW MEXICO
FIELD: PECOS SLOPE, ABO
API NO. 30-005-61498

GR 4031
SPUDDED 3/31/1982
COMPLETED 4/27/1982
LAT 33.9286842
LONG -104.395134
FORMATION TOPS PER C-105
SAN ANDRES 643
GLORIETA 1599
FULLERTON 2964
ABO 3576

AFTER P&A


20" CONDUCTOR.

12-1/4" HOLE

8-5/8" 24# J-55
CMT W/ 700 SX. CIRC.

7-7/8" HOLE

4-1/2" 9.5# J-55 LT&C
CMT W/ 350 SX.

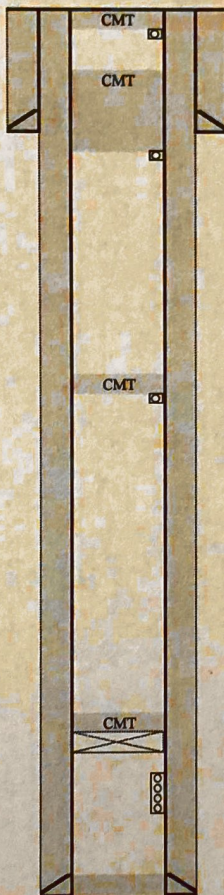

40'
PERF @ 100'. CIRC CMT TO SURF VIA 4-1/2" X 8-5/8" CSG ANN. VERIFY CMT TO SURF.

889'
PERF @ 939' SQZ 175 SX 589-939' WOC & TAG. (8-5/8" SHOE & SAN ANDRES)

PERF @ 1,649' SQZ 50 SX 1,549-1,649' WOC & TAG. (GLORIETA)

SET CIBP @ 3,578' TAG SPOT 25 SX. WOC & TAG

ABO PERFS: 3,628-3,885' (20 HOLES)
-ACIDIZE W/ 3,000 GALS 7.5%
-FRAC W/ 1,500 GALS 7.5% ACID, 40,000 GALS GELLED KCL & 80,000# 20/40 SAND

4,031'

PBTD: 3,978'
TD: 4,040'

KDZ 08-09-2020