

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division

Sundry Notices and Reports on Wells

1. Type of Well
GAS

CONFIDENTIAL

API # (assigned by OCD)
30-001-20006

5. Lease Number
Fee

6. State Oil&Gas Lease #

2. Name of Operator

**BURLINGTON
RESOURCES**

OIL & GAS COMPANY

7. Lease Name/Unit Name

Westland Develop. Corp

8. Well No.
1

9. Pool Name or Wildcat
Wildcat Entrada

10. Elevation: 5940 GR

3. Address & Phone No. of Operator

PO Box 4289, Farmington, NM 87499 (505) 326-9700

4. Location of Well, Footage, Sec., T, R, M

660' FSL, 660' FWL, Sec. 21, T-10-N, R-1-E, NMPM, Bernalillo County

Type of Submission

Type of Action

☐ Notice of Intent	☒ Abandonment	☐ Change of Plans
	☐ Recompletion	☐ New Construction
☒ Subsequent Report	☐ Plugging Back	☐ Non-Routine Fracturing
	☐ Casing Repair	☐ Water Shut off
☐ Final Abandonment	☐ Altering Casing	☐ Conversion to Injection
	☒ Other -	

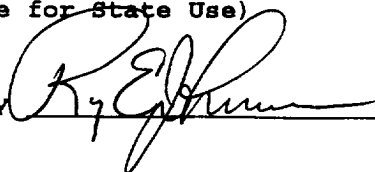
13. Describe Proposed or Completed Operations

- 9-16-97 Pump 25 bbl Class "B" neat cmt as flex plug. Displace w/3 bbl diesel & 25 bbl mud. TOOH.
- 9-17-97 Drill cmt @ 1643-1663'. Pump 25 bbl Class "B" neat cmt. Displace w/3 bbl diesel, 25 bbl mud. TOOH. WOC. TIH tag TOC @ 1643'. Drill cmt @ 1643-1721'. Drilling ahead.
- 9-18-97 Drill to 1833'. TOOH. TIH to 1700'. Pump 40 bbl wtr ahead. Pump 160 sx right angle cmt /2% calcium chloride, 0.25 pps Cellophane, 5 pps Kolite (22.4 cu.ft.). Tailed w/100 sx Class "G" neat cmt w/2% calcium chloride (116 cu.ft.). Displaced w/25 bbl wtr. TOOH. WOC. TIH, tag up @ 1820'. No cmt in hole.
- 9-19-97 Drilling ahead. (Verbal approval to change intermediate csg to 9 5/8" 36# K-55 csg from Roy Johnson, OCD).
- 9-23-97 Wash & ream. Drill pipe stuck @ 1600'. TIH w/fishing tools. Fishing.
- 9-24-97 Fishing.
- 9-25-97 Fishing. TOOH w/fishing tools. (Verbal approval to plug and abandon from Roy Johnson, OCD). Plug #1: pump 50 sx Class "G" cmt w/0.5% Versaset, 2% calcium chloride, 0.5 pps Flocele, 10 pps Gilsonite. Displace w/4 bbl wtr. WOC. TIH, tag TOC @ 737'. Plug #2: pump 49 sx Class "G" cmt w/0.5% Versaset, 2% calcium chloride, 0.5 pps Flocele, 10 pps Gilsonite. WOC.

Continued on back

SIGNATURE  Regulatory Administrator September 30, 1997

(This space for State Use)

Approved by  Title DISTRICT SUPERVISOR Date 8/1/97

9-26-97 TIH, tag TOC @ 648'. Plug #3: pump 50 sx Class "G" cmt w/0.5% Versaset, 2% calcium chloride, 0.5 pps Flocele, 10 pps Gilsonite. Displace w/1.5 bbl wtr. WOC. TIH, tag TOC @ 563'. Plug #4: pump 50 sx Class "G" cmt w/0.5% Versaset, 2% calcium chloride, 0.5 pps Flocele, 10 pps Gilsonite. Displace w/1.75 bbl wtr. TOOH. WOC. TIH, tag TOC @ 520'. Plug #5: pump 25 sx Class "G" cmt w/3% calcium chloride, 10 pps Celloflake. Displace w/4.75 bbl wtr. TOOH. WOC. TIH, tag TOC @ 469'. Plug #6: pump 194 sx Class "G" neat cmt w/2% calcium chloride. TOOH. WOC. TIH, tag TOC @ 2 Plug #7: pump 152 sx Class "G" neat cmt w/2% calcium chloride. Circ 3 bbl cmt to surface. ND BOP. Cut off WH. WOC. Set dry hole marker. Well plugged and abandoned 9-26-97.