


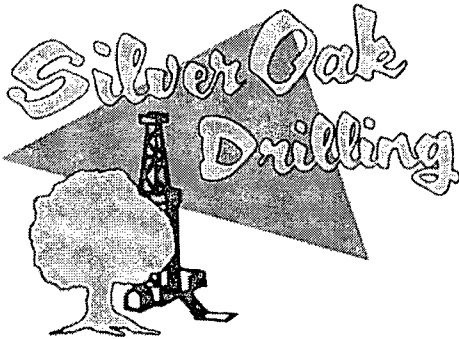

PO Box 1370
Artesia, NM 88211-1370
(575) 748-1288

July 15, 2013


COG, LLC
One Concho Center
600 W. Illinois Ave.
Midland, TX 79701

30-015-40278

RE: Burch Keely Unit #651
1474' FNL & 922' FWL
Sec. 19, T17S, R30E
Eddy County, New Mexico

Dear Sir,

The attached is the Deviation Survey for the above captioned well.




Very truly yours,

Chris Graham
Drilling Superintendent

State of New Mexico }
County of Eddy }

The foregoing was acknowledged before me this 15th day of July, 2013.

Notary Public



Burch Keely Unit #651

Date	Depth	Dev/Inc	Dir/AZ
7/6/2013	146	0.40	
7/6/2013	235	0.40	
7/7/2013	505	0.70	
7/7/2013	971	1.00	
7/9/2013	1103	0.90	102.00
7/9/2013	1165	1.90	155.30
7/9/2013	1259	4.40	172.90
7/9/2013	1352	4.30	162.20
7/9/2013	1446	1.90	161.70
7/9/2013	1540	3.10	170.30
7/9/2013	1634	2.30	166.80
7/9/2013	1915	4.00	169.70
7/9/2013	2009	3.90	167.40
7/9/2013	2103	3.50	167.30
7/10/2013	2478	3.60	172.10
7/10/2013	2571	3.50	171.20
7/10/2013	2665	3.60	170.20
7/10/2013	2853	4.00	166.90
7/10/2013	2947	3.60	166.60
7/10/2013	3040	4.40	165.70
7/10/2013	3322	4.30	162.50
7/10/2013	3416	4.50	163.20
7/10/2013	3510	4.40	161.70
7/11/2013	3792	3.40	163.50
7/11/2013	3886	3.10	155.50
7/11/2013	3980	2.10	166.60
7/11/2013	4073	1.60	166.80
7/11/2013	4167	0.30	213.80
7/11/2013	4261	0.10	173.30
7/11/2013	4354	0.40	183.20
7/11/2013	4542	0.70	216.20
7/11/2013	4637	0.70	195.70



COG Operating, LLC

Eddy County(NM27E)

Sec.19-T17S-R30E

Burch Keely Unit #651


Wellbore #1

30-015-40278

Survey: Survey #2-Archer MWD

Standard Survey Report

12 July, 2013



Archer



COG Operating, LLC
Project: Eddy County(NM27E)
Site: Sec.19-T17S-R30E
Well: Burch Keely Unit #651
Wellbore: Wellbore #1
Design: Design #3
Latitude: 32° 49' 23.215 N
Longitude: 104° 0' 58.143 W
Ground Level: 3624.00
WELL @ 3641.00usft

Archer

PROJECT DETAILS: Eddy County(NM27E)

Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: New Mexico East 3001
System Datum: Mean Sea Level

REFERENCE INFORMATION

Co-ordinate (N/E) Reference: Well Burch Keely Unit #651, Grid North
Vertical (TVD) Reference: WELL @ 3641.00usft
Section (VS) Reference: Smt - (0.00N, 0.00E)
Measured Depth Reference: WELL @ 3641.00usft
Calculation Method: Minimum Curvature

WELL DETAILS: Burch Keely Unit #651


+N/-S	+E/-W	Northing	Ground Level	Latitude	Longitude	Slor
0.00	0.00	663396.600	3624.00	32° 49' 23.215 N	104° 0' 58.143 W	

WELLBORE TARGET DETAILS (MAP CO-ORDINATES AND LAT/LONG)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
Burch Keely Unit #651 Tgt	4656.00	-185.70	58.90	663120.900	597495.500	32° 49' 21.375 N	104° 0' 57.460 W	Circle (Radius: 10.00)



SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dlog	TFace	VSecl	Annotation
1022.00	1.13	94.41	1021.92	-6.87	6.79	0.00	0.00	8.42	Time-In / Start DLS 0.88° TFO -180.00
1150.00	0.00	0.00	1149.92	-6.96	7.46	0.88	-180.00	8.89	Start DLS 2.50° TFO 163.94
1337.16	3.74	163.94	1336.94	-12.84	9.15	2.00	163.94	15.00	Start 2561.71° hold at 1337.16 MD
3958.87	1.74	163.94	3958.97	-179.83	57.21	0.00	0.00	188.71	Start Drop -2.00°
4186.03	0.00	0.01	4186.00	-185.70	58.90	2.00	180.00	194.82	Start 470.00° hold at 4186.03 MD
4656.03	0.00	0.01	4656.00	-185.70	58.90	0.00	0.01	194.82	TD at 4656.03



Azimuths to Grid North
True North: -0.17°
Magnetic North: 7.41°

Magnetic Field
Strength: 48722.5nT
Dip Angle: 60.61°
Date: 06/28/2013
Model: IGRF2010

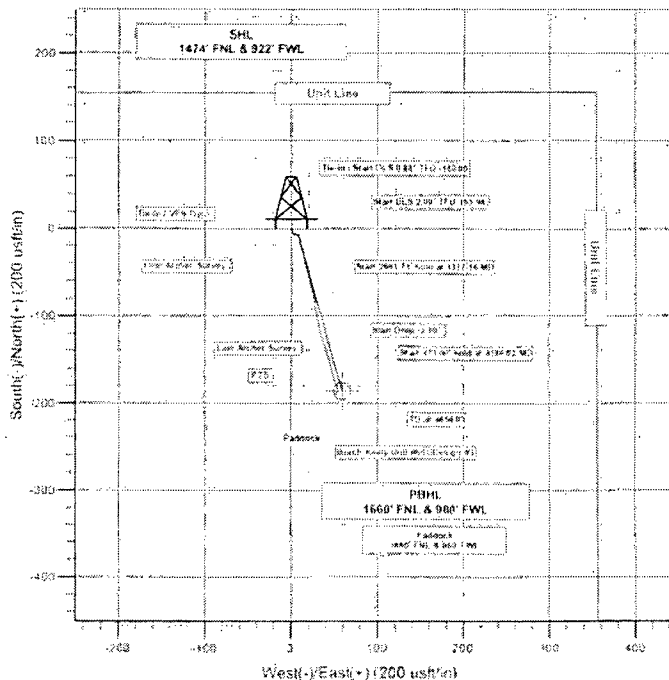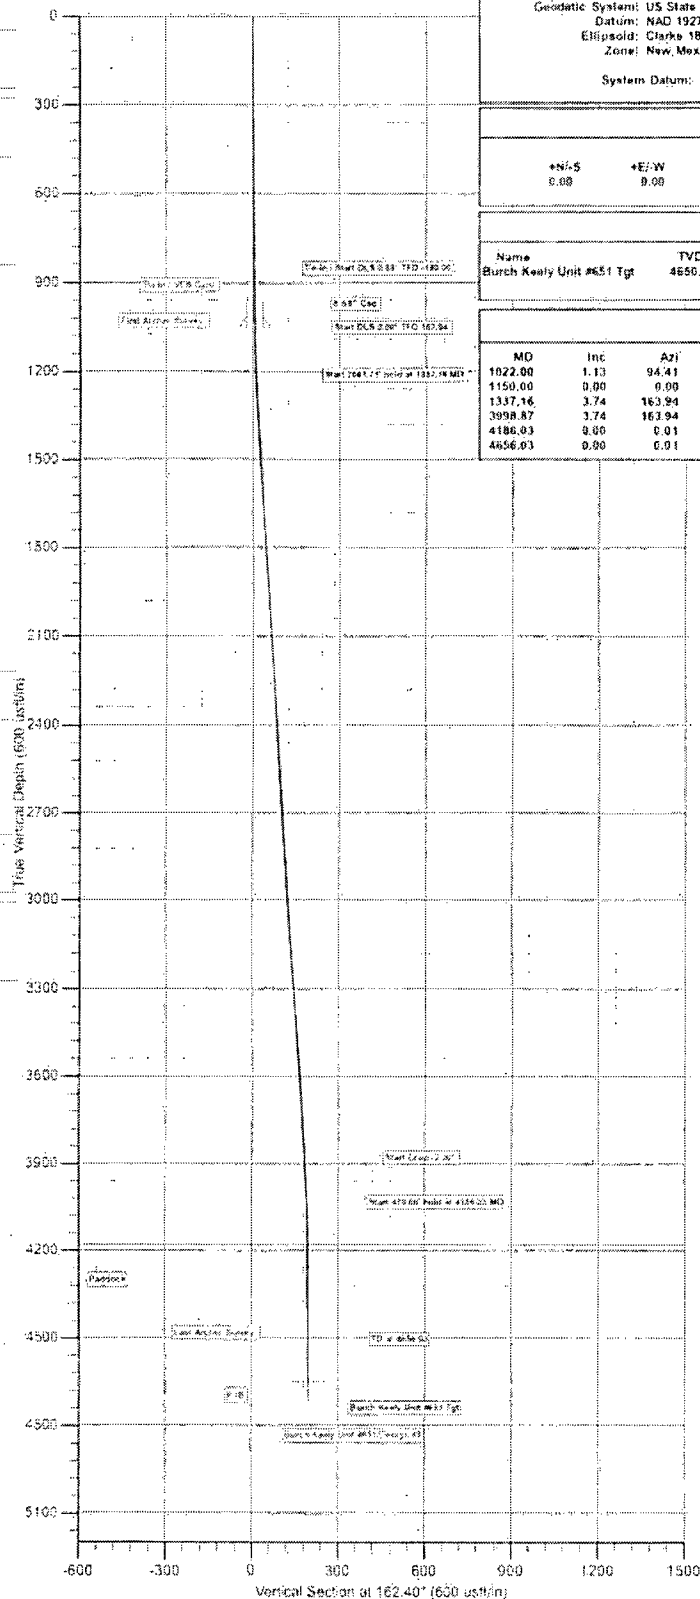

Plan: Design #3 (Burch Keely Unit #651/Wellbore #1)

Created By: Bret Wolford Date: 6:38, July 12 2013

Company: COG Operating, LLC
 Project: Eddy County(NM27E)
 Site: Sec.19-T17S-R30E
 Well: Burch Keely Unit #651
 Wellbore: Wellbore #1
 Design: Wellbore #1

Local Co-ordinate Reference: Well Burch Keely Unit #651
 TVD Reference: WELL @ 3641.00usft
 MD Reference: WELL @ 3641.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Database: EDM 5000.1 Single User Db

Project: Eddy County(NM27E)
 Map System: US State Plane.1927 (Exact solution)
 Geo Datum: NAD 1927 (NADCON CONUS)
 Map Zone: New Mexico East 3001
 System Datum: Mean Sea Level

Site: Sec.19-T17S-R30E

Site Position: Northing: 662,445.100 usft Latitude: 32° 49' 14.575 N
 From: Map Easting: 601,220.700 usft Longitude: 104° 0' 13.830 W
 Position Uncertainty: 0.00 usft Slot Radius: 13-3/16" Grid Convergence: 0.18 "

Well: Burch Keely Unit #651

Well Position: +N/-S 0.00 usft Northing: 663,306.600 usft Latitude: 32° 49' 23.215 N
 +E/-W 0.00 usft Easting: 597,436.600 usft Longitude: 104° 0' 58.143 W
 Position Uncertainty: 0.00 usft Wellhead Elevation: usft Ground Level: 3,624.00 usft

Wellbore: Wellbore #1

Magnetics: Model Name Sample Date Declination Dip Angle Field Strength
 (°) (°) (nT)
 IGRF2010 06/28/13 7.59 60.61 46,722

Design: Wellbore #1

Audit Notes:

Version: 1.0 Phase: ACTUAL Tie On Depth: 0.00

Vertical Section: Depth From (TVD) +N/-S +E/-W Direction
 (usft) (usft) (usft) (°)
 0.00 0.00 0.00 162.40

Survey Program Date: 07/12/13

From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
100.00	1,022.00	Survey #1-VES Gyro (Wellbore #1)	GYD_OP_MS	Gyrodata gyro-compassing and drop
1,022.00	4,672.00	Survey #2-Archer MWD (Wellbore #1)	MWD	MWD - Standard

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
Tie-In / VES Gyro									
1,022.00	1.13	94.41	1,021.92	-6.87	6.20	8.42	0.00	0.00	0.00
First Archer Survey									
1,103.00	0.90	102.00	1,102.91	-7.06	7.62	9.03	0.33	-0.28	9.37
1,165.00	1.90	155.30	1,164.89	-8.09	8.53	10.29	2.49	1.61	85.97
1,259.00	4.40	171.90	1,258.75	-13.08	9.69	15.40	2.80	2.66	17.66
1,352.00	4.30	162.20	1,351.48	-19.93	11.25	22.40	0.80	-0.11	-10.43
1,446.00	1.90	161.70	1,445.34	-24.77	12.82	27.49	2.55	-2.55	-0.53
1,540.00	3.10	170.30	1,539.25	-28.75	13.74	31.56	1.33	1.28	9.15
1,634.00	2.30	166.80	1,633.14	-33.10	14.60	35.86	0.87	-0.85	-3.72
1,728.00	3.30	170.40	1,727.03	-37.60	15.48	40.52	1.08	1.06	3.83
1,822.00	3.50	162.40	1,820.86	-43.00	16.80	46.07	0.55	0.21	-8.51

Company: COG Operating, LLC
 Project: Eddy County(NM27E)
 Site: Sec.19-T17S-R30E
 Well: Burch Keely Unit #551
 Wellbore: Wellbore #1
 Design: Wellbore #1

Local Co-ordinate Reference: Well Burch Keely Unit #551
 TVD Reference: WELL @ 3541.00usft
 MD Reference: WELL @ 3541.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Database: EDM 5000.1 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
1,915.00	4.00	165.70	1,913.66	-48.85	18.46	52.15	0.59	0.54	3.55
2,009.00	3.30	167.40	2,007.44	-55.15	19.96	58.60	0.18	-0.11	1.81
2,103.00	3.50	167.30	2,101.24	-61.07	21.29	64.65	0.43	-0.43	-0.11
2,196.00	3.40	163.30	2,194.07	-66.48	22.71	70.23	0.28	-0.11	-4.30
2,290.00	3.30	164.30	2,287.91	-71.75	24.24	75.72	0.12	-0.11	1.06
2,384.00	2.80	164.60	2,381.78	-76.57	25.58	80.72	0.53	-0.53	0.32
2,478.00	3.60	172.10	2,475.63	-81.71	26.60	85.92	0.96	0.85	7.98
2,571.00	3.50	171.20	2,568.46	-87.40	27.44	91.61	0.12	-0.11	-0.97
2,665.00	3.60	170.20	2,662.27	-93.15	28.38	97.37	0.13	0.11	-1.08
2,759.00	4.00	172.50	2,756.07	-99.31	29.31	103.52	0.46	0.43	2.45
2,853.00	4.00	166.90	2,849.84	-105.75	30.48	110.02	0.42	0.00	-5.96
2,947.00	3.60	166.60	2,943.63	-111.81	31.90	116.23	0.43	-0.43	-0.32
3,040.00	4.40	165.70	3,036.41	-118.11	33.46	122.70	0.86	0.86	-0.97
3,134.00	4.40	163.90	3,130.13	-125.07	35.35	129.91	0.15	0.00	-1.91
3,228.00	4.30	160.90	3,223.86	-131.86	37.51	137.03	0.26	-0.11	-3.19
3,322.00	4.30	162.50	3,317.59	-138.55	39.72	144.08	0.13	0.00	1.70
3,416.00	4.50	163.20	3,411.32	-145.45	41.84	151.29	0.22	0.21	0.74
3,510.00	4.40	161.70	3,505.03	-152.40	44.04	158.58	0.16	-0.11	-1.60
3,604.00	4.40	165.20	3,598.76	-159.31	46.10	165.79	0.29	0.00	3.72
3,698.00	4.40	165.20	3,692.48	-166.28	47.94	172.99	0.00	0.00	0.00
3,792.00	3.40	163.50	3,788.26	-172.44	49.65	179.38	1.07	-1.06	-1.81
3,886.00	3.10	155.50	3,880.11	-177.43	51.50	184.69	0.58	-0.32	-8.51
3,980.00	2.10	166.60	3,974.01	-181.41	52.95	188.93	1.19	-1.06	11.81
4,073.00	1.60	166.80	4,068.96	-184.34	53.64	191.93	0.54	-0.54	0.22
4,167.00	0.30	213.80	4,166.95	-185.82	53.80	193.39	1.50	-1.38	50.00
4,261.00	0.10	173.30	4,254.95	-186.10	53.68	193.62	0.25	-0.21	-43.09
4,354.00	0.40	183.20	4,347.95	-186.51	53.67	194.01	0.32	0.32	10.65
4,448.00	0.50	215.60	4,441.94	-187.17	53.41	194.56	0.29	0.11	34.47
4,542.00	0.70	216.10	4,535.94	-187.97	52.83	195.14	0.21	0.21	0.53
Last Archer Survey									
4,618.00	0.70	195.70	4,611.93	-188.79	52.43	195.81	0.33	0.00	-26.84
PTB									
4,672.00	0.70	195.70	4,665.93	-189.42	52.26	196.36	0.00	0.00	0.00

Survey Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,022.00	1,021.92	-6.67	6.20	Tie-In /VES Gyro
1,103.00	1,102.91	-7.08	7.52	First Archer Survey
4,618.00	4,611.93	-188.79	52.43	Last Archer Survey
4,672.00	4,665.93	-189.42	52.26	PTB

Checked By: _____

Approved By: _____

Date: _____



COG Operating, LLC

Eddy County(NM27E)

Sec.19-T17S-R30E

Burch Keely Unit #651

Wellbore #1

Survey: Survey #2-Archer MWD

Survey Report - Geographic

15 July, 2013

Archer

Company:	COG Operating, LLC	Local Co-ordinate Reference:	Well Burch Keely Unit #651
Project:	Eddy County(NM27E)	TVD Reference:	WELL @ 3641.00usft
Site:	Sec.19-T17S-R30E	MD Reference:	WELL @ 3641.00usft
Well:	Burch Keely Unit #651	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	EDM 5000.1 Single User Db

Project:	Eddy County(NM27E)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site:	Sec.19-T17S-R30E		
Site Position:	Map	Northing:	662,445.100 usft
From:		Easting:	601,220.700 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16"
		Latitude:	32° 49' 14.575 N
		Longitude:	104° 0' 13.830 W
		Grid Convergence:	0.18 "

Well:	Burch Keely Unit #651			
Well Position	+N/-S	0.00 usft	Northing:	663,306.600 usft
	+E/-W	0.00 usft	Easting:	597,436.600 usft
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft	Ground Level:
				3,624.00 usft
				Latitude:
				32° 49' 23.215 N
				Longitude:
				104° 0' 58.143 W

Wellbore:	Wellbore #1				
Magnetics:	Model Name	Sample Date	Declination	Dip Angle	Field Strength
	IGRF2010	06/28/13	(°)	(°)	(nT)
			7.59	60.61	48,722

Design:	Wellbore #1				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction	
	(usft)	(usft)	(usft)	(°)	
	0.00	0.00	0.00	162.40	

Survey Program	Date:	07/12/13			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
100.00	1,022.00	Survey #1-VES Gyro (Wellbore #1)	GYD_DP_MS	Gyrodata gyro-compassing and drop	
1,022.00	4,672.00	Survey #2-Archer MWD (Wellbore #1)	MWD	MWD - Standard	

Company: COG Operating, LLC
 Project: Eddy County(NM27E)
 Site: Sec.19-T17S-R30E
 Well: Burch Keely Unit #651
 Wellbore: Wellbore #1
 Design: Wellbore #1

Local Co-ordinate Reference:
 TVD Reference:
 MD Reference:
 North Reference:
 Survey Calculation Method:
 Database:

Well Burch Keely Unit #651
 WELL @ 3641.00usft
 WELL @ 3641.00usft
 Grid
 Minimum Curvature
 EDM 5000.1 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	N-S (usft)	E-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
Tie-In / VES Gyro									
1,022.00	1.13	94.41	1,021.92	-6.87	6.20	663,299.734	597,442.802	32° 49' 23.147 N	104° 0' 58.071 W
First Archer Survey									
1,103.00	0.90	102.00	1,102.91	-7.06	7.62	663,299.540	597,444.220	32° 49' 23.145 N	104° 0' 58.054 W
1,165.00	1.90	155.30	1,164.89	-8.09	8.53	663,298.505	597,445.126	32° 49' 23.134 N	104° 0' 58.044 W
1,259.00	4.40	171.90	1,258.75	-13.08	9.69	663,293.519	597,446.286	32° 49' 23.085 N	104° 0' 58.030 W
1,352.00	4.30	162.20	1,351.48	-19.93	11.25	663,286.667	597,447.854	32° 49' 23.017 N	104° 0' 58.012 W
1,446.00	1.90	161.70	1,445.34	-24.77	12.82	663,281.832	597,449.421	32° 49' 22.959 N	104° 0' 57.994 W
1,540.00	3.10	170.30	1,539.25	-28.75	13.74	663,277.847	597,450.338	32° 49' 22.930 N	104° 0' 57.983 W
1,634.00	12.30	166.80	1,633.14	-33.10	14.50	663,273.505	597,451.197	32° 49' 22.887 N	104° 0' 57.973 W
1,728.00	3.30	170.40	1,727.03	-37.60	15.48	663,269.001	597,452.079	32° 49' 22.842 N	104° 0' 57.963 W
1,822.00	3.50	162.40	1,820.86	-43.00	16.80	663,263.598	597,453.398	32° 49' 22.789 N	104° 0' 57.948 W
1,915.00	4.00	165.70	1,913.66	-48.85	18.46	663,257.749	597,455.058	32° 49' 22.731 N	104° 0' 57.929 W
2,009.00	3.90	167.40	2,007.44	-55.15	19.96	663,251.452	597,456.565	32° 49' 22.668 N	104° 0' 57.911 W
2,103.00	3.50	167.30	2,101.24	-61.07	21.29	663,245.534	597,457.893	32° 49' 22.610 N	104° 0' 57.896 W
2,196.00	3.40	163.30	2,194.07	-66.48	22.71	663,240.129	597,459.309	32° 49' 22.556 N	104° 0' 57.879 W
2,290.00	3.30	164.30	2,287.91	-71.75	24.24	663,234.848	597,460.843	32° 49' 22.504 N	104° 0' 57.862 W
2,384.00	2.80	164.60	2,381.78	-76.57	25.58	663,230.030	597,462.184	32° 49' 22.456 N	104° 0' 57.846 W
2,478.00	3.60	172.10	2,475.63	-81.71	26.60	663,224.894	597,463.200	32° 49' 22.405 N	104° 0' 57.834 W
2,571.00	3.50	171.20	2,568.46	-87.40	27.44	663,219.196	597,464.035	32° 49' 22.349 N	104° 0' 57.825 W
2,665.00	3.60	170.20	2,662.27	-93.15	28.38	663,213.453	597,464.977	32° 49' 22.292 N	104° 0' 57.814 W
2,759.00	4.00	172.50	2,756.07	-99.31	29.31	663,207.294	597,465.907	32° 49' 22.231 N	104° 0' 57.803 W
2,853.00	4.00	166.90	2,849.84	-105.75	30.48	663,200.850	597,467.078	32° 49' 22.167 N	104° 0' 57.790 W
2,947.00	3.60	166.60	2,943.63	-111.81	31.90	663,194.786	597,468.505	32° 49' 22.107 N	104° 0' 57.773 W
3,040.00	4.40	165.70	3,036.41	-118.11	33.46	663,188.489	597,470.063	32° 49' 22.045 N	104° 0' 57.755 W
3,134.00	4.40	163.90	3,130.13	-125.07	35.35	663,181.530	597,471.953	32° 49' 21.976 N	104° 0' 57.733 W
3,228.00	4.30	160.90	3,223.86	-131.86	37.51	663,174.736	597,474.106	32° 49' 21.909 N	104° 0' 57.708 W
3,322.00	4.30	162.50	3,317.59	-138.55	39.72	663,168.045	597,476.319	32° 49' 21.843 N	104° 0' 57.683 W
3,416.00	4.50	163.20	3,411.32	-145.45	41.84	663,161.154	597,478.445	32° 49' 21.774 N	104° 0' 57.658 W
3,510.00	4.40	161.70	3,505.03	-152.40	44.04	663,154.200	597,480.643	32° 49' 21.705 N	104° 0' 57.632 W
3,604.00	4.40	165.20	3,598.76	-159.31	46.10	663,147.291	597,482.596	32° 49' 21.637 N	104° 0' 57.609 W
3,698.00	4.40	165.20	3,692.48	-166.28	47.94	663,140.318	597,484.538	32° 49' 21.568 N	104° 0' 57.587 W
3,792.00	3.40	163.50	3,786.26	-172.44	49.65	663,134.160	597,486.251	32° 49' 21.507 N	104° 0' 57.567 W
3,886.00	3.10	155.50	3,880.11	-177.43	51.50	663,129.174	597,488.097	32° 49' 21.458 N	104° 0' 57.546 W
3,980.00	2.10	166.60	3,974.01	-181.41	52.95	663,125.186	597,489.550	32° 49' 21.418 N	104° 0' 57.529 W
4,073.00	1.60	168.80	4,066.96	-184.34	53.64	663,122.264	597,490.241	32° 49' 21.389 N	104° 0' 57.521 W
4,167.00	0.30	213.80	4,160.99	-185.82	53.80	663,120.782	597,490.404	32° 49' 21.374 N	104° 0' 57.516 W
4,261.00	0.10	173.30	4,254.95	-186.10	53.68	663,120.498	597,490.277	32° 49' 21.372 N	104° 0' 57.521 W
4,354.00	0.40	183.20	4,347.95	-186.51	53.67	663,120.091	597,490.268	32° 49' 21.368 N	104° 0' 57.521 W
4,448.00	0.50	215.60	4,441.94	-187.17	53.41	663,119.430	597,490.011	32° 49' 21.361 N	104° 0' 57.524 W
4,542.00	0.70	216.10	4,535.94	-187.97	52.83	663,118.633	597,489.434	32° 49' 21.353 N	104° 0' 57.531 W
Last Archer Survey									
4,618.00	0.70	195.70	4,611.93	-188.79	52.43	663,117.811	597,489.035	32° 49' 21.345 N	104° 0' 57.535 W
PTB									
4,672.00	0.70	195.70	4,665.93	-189.42	52.26	663,117.175	597,488.856	32° 49' 21.339 N	104° 0' 57.538 W



Archer
Survey Report - Geographic

Archer

Company: COG Operating, LLC
Project: Eddy County(NM27E)
Site: Sec.19-T17S-R30E
Well: Burch Keely Unit #651
Wellbore: Wellbore #1
Design: Wellbore #1

Local Co-ordinate Reference: Well Burch Keely Unit #651
TVD Reference: WELL @ 3641.00usft
MD Reference: WELL @ 3641.00usft
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Survey Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates +N/-S (usft)	+E/-W (usft)	Comment
1,022.00	1,021.92	-6.87	6.20	Tie-In / VES Gyro
1,103.00	1,102.91	-7.06	7.52	First Archer Survey
4,618.00	4,611.93	-188.79	52.43	Last Archer Survey
4,672.00	4,665.93	-189.42	52.26	PTB

Checked By: _____

Approved By: _____

Date: _____