

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Oil Co. is. FORM APPROVED
N.M. Div-Dist. 2
1301 W. Grand Avenue
Artesia, NM 88210
Bureau No. 1004-0135
Expires: March 31, 1993
Lease Application and Serial No.
NM - 11814

C1517

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
Oil ☐ Gas ☐
Well ☐ Well ☒ Other ☐

2. Name of Operator

STRATA PRODUCTION COMPANY

3. Address and Telephone No.

P. O. Box 1030
Roswell, New Mexico 88202-1030

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

860' FSL & 660' FWL
Section 11-16S-30E

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Duncan Federal

9. API Well No.

#1

10. Field and Pool, or Exploratory Area

Henshaw - Q - G - SA

11. County or Parish, State

Eddy

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log Form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Set CIBP @ 2500' w/35' cement. Circulate hole with 9#/Gal mud. Spot 200' plug, 20 sx, 1340' - 1540'. Spot 200' plug, 20 sx 350' - 550'. Spot 50' plug, 5 sx surface plug. Install dry hole marker. Clean location, rip and reseed.

(Attachment: Plugging Procedure)

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

Accepted for record - NMOCD

APPROVED

MAR 25 1992

LES BABYAK
PETROLEUM ENGINEER

14. I hereby certify that the foregoing is true and correct

Signed Kevin M. Britt

Title Production Records

Date March 14, 2002

(This space for Federal or State office use)

Approved by

Title


Date

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

* See Instruction on Reverse Side

EXISTING

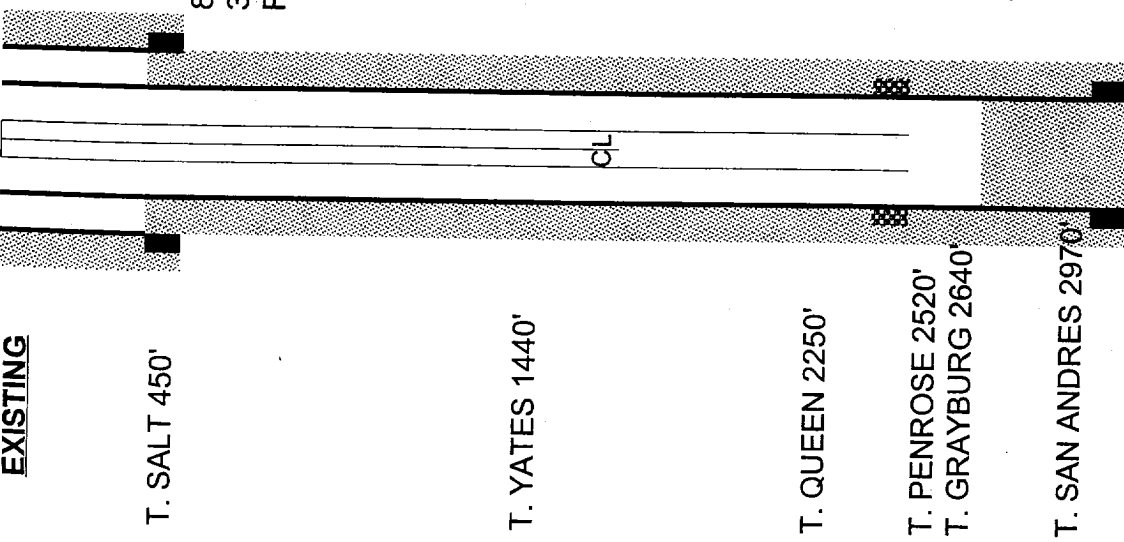

T. SALT 450'

T. YATES 1440'

T. QUEEN 2250'

T. PENROSE 2520'
T. GRAYBURG 2640'

T. SAN ANDRES 2970'

8 5/8" CASING @ 446'
300 SX - TOC @ 45'
REDY-MIX 45'-SURF.

DUNCAN FEDERAL #1
860' FSL & 660' FWL
SEC. 11-T16S-R30E
EDDY COUNTY, NM
API # 30-015-22937
SPUD DATE: 6/11/79

50', 5 SX SURFACE PLUG
200', 20 SX, PLUG 350-550'

200', 20 SX, PUG 1340-1540'

LOAD HOLE WITH 9 #/GAL. MUD

CIBP @ 2500' W/ 35' CEMENT

INSTALL DRY HOLE MARKER
CLEAN LOCATION, RIP AND RESEED

2 3/8" TUBING @ 2475'

PERF. 2524-34'

PBTD 2685'

4 1/2" CASING @ 3010'
400 SX. HLC & 200 SX 50/50 POZMIX
4 1/2" X 7 5/8" = .2278 CU. FT. / FT.
600SX + 25% EXCESS=3100' FILL

PROPOSED

