

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. O' 1s. Division
811 S. 1st Street
Artesia, NM 88210-2834

FORM APPROVED
Budget Bureau No. 1004-0135
Expires March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator
DEVON ENERGY CORPORATION (NEVADA)

3. Address and Telephone No.
20 NORTH BROADWAY, SUITE 1500, OKLAHOMA CITY, OKLAHOMA 73102 (405) 235-3511

4. Location of Well (Footage. Sec., T., R., M., or Survey Description)
990' FSL & 2100' FEL of Section 35-T17S-R27E, Unit "O"

5. Lease Designation and Serial No.
LC-028755-A

6. If Indian, Allottee or Tribe Name
NA

7. If Unit or CA, Agreement Designation

8. Well Name and No.
Logan 35B Federal #9

9. API Well No.
30-015-30409

10. Field and Pool, or Exploratory Area
Red Lake; Glorieta-Yeso, NE

11. County or Parish, State
Eddy County, NM

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
- ☒ Subsequent Report
- ☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
- ☐ Recompletion
- ☐ Plugging Back
- ☐ Casing Repair
- ☐ Altering Casing
- ☒ Other Add perfs & stimulate

- ☐ Change of Plans
- ☐ New Construction
- ☐ Non-Routine Fracturing
- ☐ Water Shut-Off
- ☐ Conversion to Injection
- ☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Devon Energy Corporation (Nevada) additionally perforated the Lower Yeso and stimulated as follows: Work began on 7/12/99. TOH w/ 2-7/8" tbg, PU 4-3/4" bit & TIH. Drilled out FC & shoe jt from 3353'-3392'. TOH & LD btm 4 jts tbg. TIH w/ 4" csg gun & perforated L. Yeso w/ 1 SPF as follows: 3318', 20', 26', 30', 36', 41', 50', 55', 58', 60', 64', & 76' for a total of 12 holes (.40" EHD). TIH w/ pkr & set @ 3270'. Acidized L. Yeso perfs 3318'-3376' w/ 1000 gals 20% NE-FE acid + 24 ball sealers @ max rate & pressure of 6.9 BPM & 3500 psi. Did not ball out, went on vac instantly. Lowered pkr past perfs to knock balls off. Reset pkr. Acid fractured L. Yeso perfs 3318'-3376' w/ 12,000 gals 20% NE-FE acid. Flowed well down. Released pkr, TOH & LD pkr. Ran 2-7/8" tbg & set SN @ 3289'. Ran pump & rods & tested until production stabilized.

14. I hereby certify that the foregoing is true and correct

Signed

Tonja Rutelonis

Tonja Rutelonis


Title Engineering Technician

(This space for Federal or State office use)

Approved by

Title

Conditions of approval, if any:

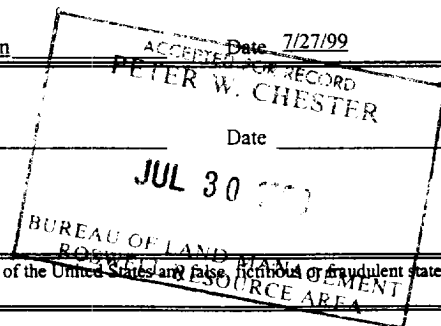

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations to any matter within its jurisdiction.

*See Instruction on Reverse Side