

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRI. ATE*
(Other instructions on re-
verse side)Form approved.
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. OIL WELL ☐ GAS WELL ☐ OTHER ☒ S.I. Possible water Inj. Well.		5. LEASE DESIGNATION AND SERIAL NO. LC-028784-c
2. NAME OF OPERATOR General American Oil Company of Texas		6. IF INDIAN, ALLOTTEE OR TRIBE NAME
3. ADDRESS OF OPERATOR P. O. Box 416, Loco Hills, New Mexico 88255		7. UNIT AGREEMENT NAME
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 1980' FSL and 660' FWL, Sec. 13, T-17-S R-29E.		8. FARM OR LEASE NAME Keely C
14. PERMIT NO.		9. WELL NO. 50
15. ELEVATIONS (Show whether DF, RT, GR, etc.) 3621' CL		10. FIELD AND POOL, OR WILDCAT Grayburg-Jackson
		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 13, T17S, R29E.
		12. COUNTY OR PARISH Eddy
		13. STATE N.M.

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- Well spudded at 11:00 A.M. 5-1-71.
- Ran 428' KB of 8-5/8" 20# casing as follows:
 - Volume of cement equalled 132 cubic feet (100 sacks).
 - Brand of cement was Southwestern Class C with 2% CACL.
 - Approximate temperature of cement slurry 65°F.
 - Formation temperature 65°F.
 - After standing cemented for 9 hours compressive strength was 800#. Pressure tested to 400#. Tested OK.
 - Drilled out cement after standing 12 hours.
- Ran 2605' KB of 4 1/2" 9.5# casing and cemented with 225 sacks.
- We perforated as follows: 4 holes(2450-2454), 20 holes(2486-2498), 5 holes(2518-2525),
- We sand fraced the Metex Sand with 30,000# sand and 30,000 gallons gelled water.
- We plan to seek approval to begin water injection in the near future.

RECEIVED

SEP 7 1971

RECEIVED

SEP 8 1971

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Asst. Dist. Supr.


O. C. C.

DATE Sept. 3, 1971

(This space for Federal or State office use)

TITLE

DATE

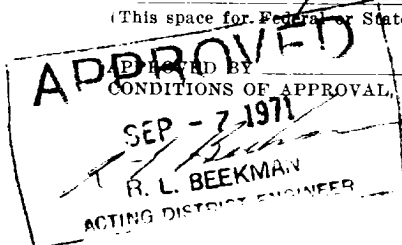

*See Instructions on Reverse Side

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian lands should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

U.S. GOVERNMENT PRINTING OFFICE: 1965
O-885229
847-485

RECEIVED
FEB 11 1966
BUREAU OF LAND MANAGEMENT
WASHINGTON, D.C.