


STATE OF NEW MEXICO  
ENERGY AND MINERALS DEPARTMENT

OIL CONSERVATION DIVISION

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	<input checked="" type="checkbox"/>
FILE	<input checked="" type="checkbox"/>
U.S.G.S.	
LAND OFFICE	<input checked="" type="checkbox"/>
OPERATOR	<input checked="" type="checkbox"/>

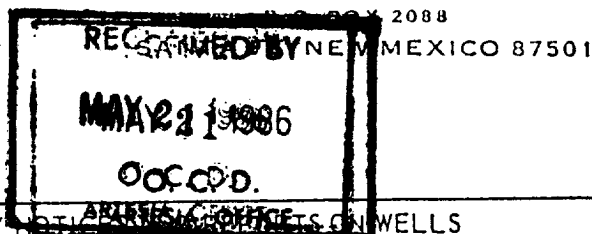

Form C-103  
Revised 10-1-73

SUNDRY NOTICES CONCERNING WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR.  
USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	7. Unit Agreement Name
2. Name of Operator Yates Petroleum Corporation	8. Farm or Lease Name Kleeman PB
3. Address of Operator 207 South 4th St., Artesia, NM 88210	9. Well No. 2
4. Location of Well UNIT LETTER <u>P</u> <u>660</u> FEET FROM THE <u>South</u> LINE AND <u>330</u> FEET FROM THE <u>East</u> LINE, SECTION <u>27</u> TOWNSHIP <u>18S</u> RANGE <u>26E</u> NMPM.	10. Field and Pool, or Wildcat Atoka Glorieta Yeso
15. Elevation (Show whether DF, RT, GR, etc.) 3333' GR	12. County Eddy

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOBS <input type="checkbox"/>	OTHER <u>Perforate Lower Yeso &amp; treat</u> <input checked="" type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

5-13-86. Moved in and RUPU. Perforated Lower Yeso 3629-3774' w/13 .50" holes as follows: 3629, 31, 33, 35, 3705, 07, 09, 11, 3765, 67, 70, 72 and 74'. Acidized perfs w/2000 gals 15% NEFE acid and 7 ball sealers.  
5-14-86. Frac'd perfs 3629-3774' w/60000 gals gelled water + 120000# 20/40 sand. After frac job, acidized old perfs 3350-3412' w/2000 gals 15% NEFE acid.  
5-15-86. Returned well to production.

Perforations open: 2760-2888', 3016-62', 3350-3412', 3629-3774'.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED Luanta Goodlett TITLE Production Supervisor DATE 5-21-86

Original Signed By  
Las A. Clements

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE MAY 29 1986

Supervisor District 11

CONDITIONS OF APPROVAL, IF ANY:

