

RECEIVED

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

DEC 01 1993

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION (505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660' FNL & 660' FEL (Unit A), Section 31-T19S-R24E

5. Lease Designation and Serial No.

NM-76936

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Sunflower AHW Federal #2

9. API Well No.

30-015-27525

10. Field and Pool, or Exploratory Area

Undesignated Abo

11. County or Parish, State

Eddy, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice


TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Production Casing
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Td 9120'. Reached TD 2:15 PM 10-5-93. Ran 205 joints 5-1/2" 15.5# and 17# J-55 and N-80 casing set 9114'. Float shoe set 9114', float collar set 9069'. DV tool set 5022'. Cemented in two stages as follows: Stage I - 825 sx "C" + 8#/sx Silicalite + .6% Halad-322 + 2-1/2#/sx Salt (yield 1.8, wt 13.6). PD 12:30 AM 10-8-93. Bumped plug to 1500 psi for 5 minutes. Circulated 10 sacks. Circulate thru DV tool 4 hours. Stage II - 775 sx "C" + 8#/sx Silicalite + .6% Halad-322 + 2-1/2#/sx Salt (yield 1.8, wt 13.6). PD 5:45 AM 10-8-93. Bumped plug to 1500 psi for 5 minutes, float and casing held OK. WOC 18 hours.

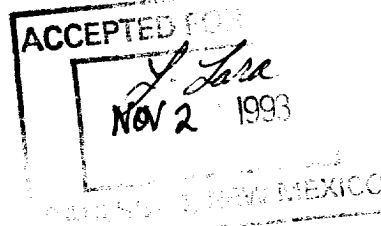

14. I hereby certify that the foregoing is true and correct

Signed [Signature]

Title Production Supervisor

Date 11-2-93

(This space for Federal or State office use)

Approved by _____

Title _____

Date _____

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side