




April 9, 1996

T-Bird State 30 - 1

Current Configuration
Elevation: 18' KB-GL

1980' FSL & 1980' FEL
Sec 30 T19S R29E
Eddy Co., New Mexico

Tubing: (Top to Bottom)
345 jts 2-3/8", 4.7#, N-80 8rd
Otis on-off tool w/1.875" "X" profile
Otis Perma Latch pkr
6' X 2-3/8" tbg sub
1.875" "X" profile nipple
WL entry guide

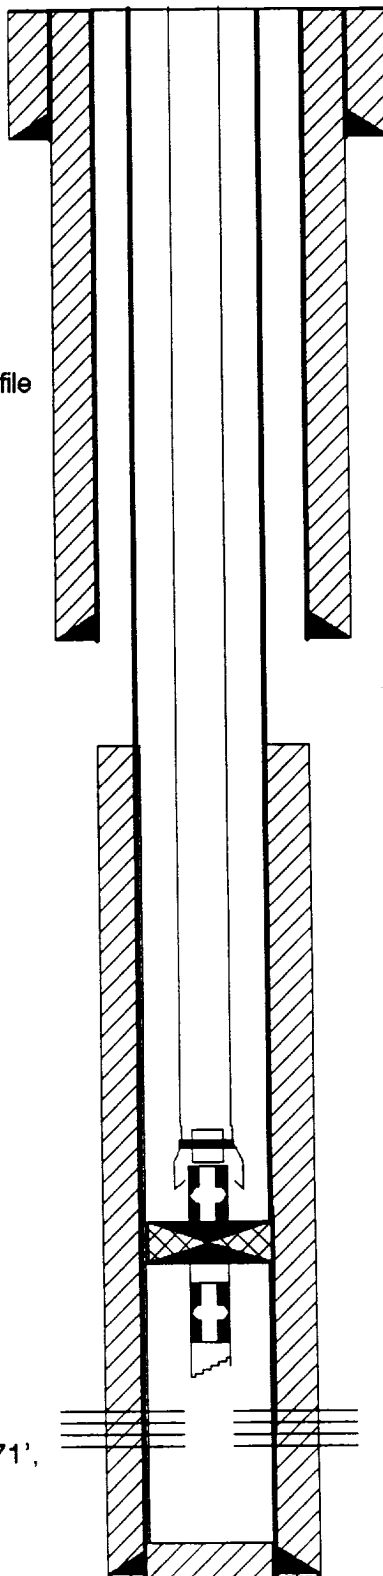

13-3/8", 48#, H-40 ST&C
Set @ 394'
Cmt'd w/420 sx-circ'd 30 sx to pit

8-5/8", 24 & 32#, K-55 ST&C
Set @ 3026'
Cmt'd w/1300 sx - circ'd to surface

TOC @ 3900' (CBL)
Voids in cmt are present
See bond log

Otis on-off tool w/1.875" "X" profile
Set @ 10,781'
2-3/8" X 5-1/2" Otis Perma Latch pkr
Set @ 10,783'
1.875" "X" Profile @ 10,792'

EOT @ 10,794'

Morrow Perfs: (4 spf)
10,863-69', 10,910-14', 11,071',
11,129-34'

5-1/2", 17 USS-95 & N-80
Set @ 11,400'
Cmt'd w/1450 sx

PBTD: 11,340'

TD: 11,400'

Prepared By: Robert Elliott