


SOUTHWEST ROYALTIES

PROJECT Levers Fed #2 SWD
Wellbore Diagram

PAGE _____ OF _____
 BY RDK DATE 1-6-93

Levers Federal #2 SWD
 1650' FSL & 1650' FEL
 Sec 2 T21S, R25E
 Eddy County, New Mexico

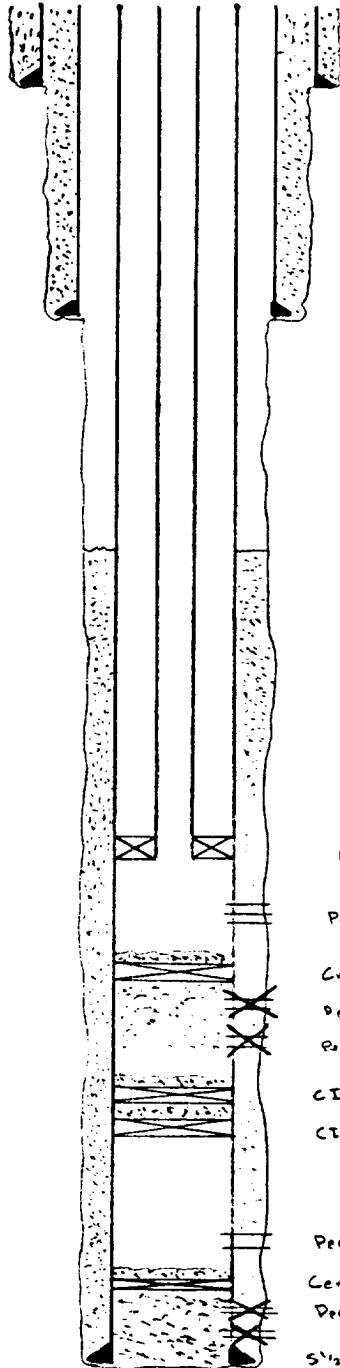

13 7/8", 48" csg @ 353'. Cmtd to surface with 293 sx.

9 5/8", 36" csg @ 2819'. Cmtd to surface with 921 sx.

Top of Cement = 6000' (Temp. Survey)

2 7/8" plastic coated tubing in well.

Baker Lok set packer @ 7941'.

Perfs in Cisco @ 8144'-8160'

Cmt Retainer @ 8345'. Squeezed thru with 250 sx. 5 sx on top of retainer

Perf @ 8460-8472'. Squeezed 10-26-81

Perfs @ 9093-9097'. Squeezed 10-26-81

CIBP @ 9590' with 10' cmt on top.

CIBP @ 9600' with 10' cmt on top

Perfs 10,134-10,140'.

Cement Retainer @ 10,200' with 10' cmt on top

Perfs 10,247-10343' & 10,446-10,464. Squeezed 1/19/77

5 1/2" 17" & 20" casing @ 10,651'. Cmt with 341 sx cmt