



June 6, 1995

GOVERNMENT AD #2

Current Configuration

Elevation: 20' KB-GL

2310' FNL & 660' FWL

Sec 27 T21S R28E

Eddy Co., New Mexico

Tbg Description: (top to bottom)

1 jt 2-7/8", 6.5# N-80 AB Mod

2-6' and 2-8' tbg subs

338 jts 2-7/8", 6.5#, N80 AB Mod

Baker double seal assy

Tailpipe:

6' mill out extension

XO

6' 2-3/8" tbg sub

1.78" F profile nipple

6' 2-3/8" MS sub

Pkr Fluid - 10 ppg brine

Wolfcamp Perfs (2 Spf):

Upper:

9505', 07, 09, 11, 9513'

Lower:

9703', 06, 09, 12, 9716'

Atoka Perfs (2 spf)

10,613', 15, 17, 60, 731, 32, 33,

51, 52, 53, 54, 805, 11, 10,819'

Upper Morrow Perfs (2 spf):


11,354', 55, 98, 401, 45, 11,448'

Lower Morrow Perfs (2 spf):

11,536', 46, 47, 86, 613, 17, 18,

25, 66, 69, 11,671'

Prepared By: Robert Elliott

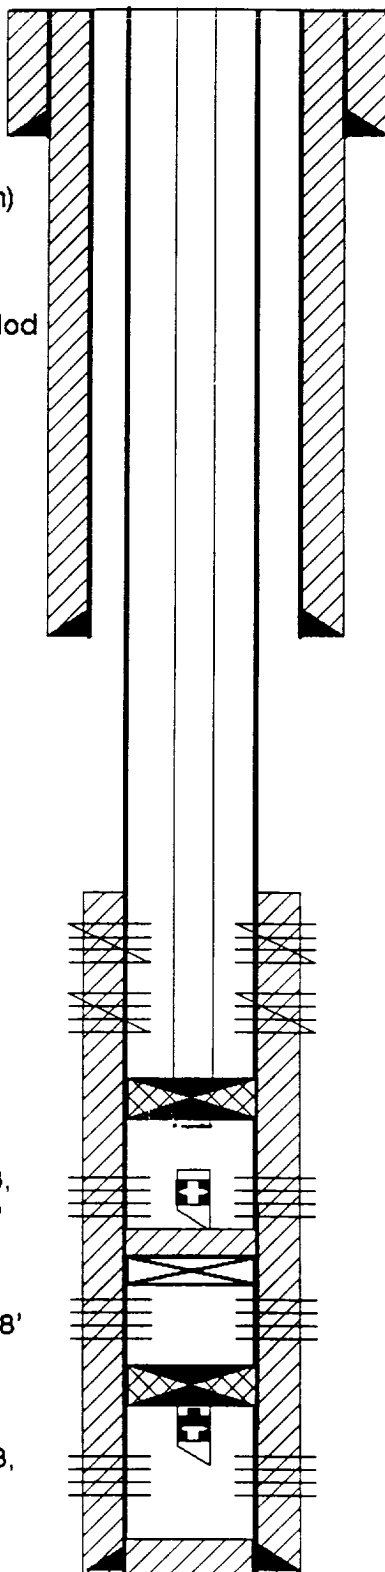

13-3/8", 54.5#, K-55 STC @ 602'
Cmt'd w/700 sx - circ'd to surface

Fish Description - 11,295'

Cut jt 2-3/8" 4.7" EUE 8rd 2'

Baker "F" nipple w/plug 0.92'

2-3/8" MS tbg sub 5.90'

8-5/8", 24 & 32#, K-55 ST&C

Set @ 3020'

Cmt'd w/1500 sx

Topped-out w/1" tbg

TOC @ 8262' (CBL)

Baker Model DB @10,550'

1.78" F-nipple @ 10,565'

PBSD 11,295' w/cmt

CIBP @ 11,330'

Baker Model DB @ 11,490'

Blanking plug in F-nipple

5-1/2", 17 & 20# N-80 LT&C

Set @ 11,815'

Cmt'd w/800 sx

PBSD: 11,770'

TD: 11,815'