

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division
811 S. 1st Street
Artesia, NM 88210-2884

FORM APPROVED
Budget Bureau No. 1004-0135
March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reenter a different reservoir.
Use "APPLICATION FOR PERMIT -" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

BONNEVILLE FUELS CORPORATION

3. Address and Telephone No

1700 BROADWAY, SUITE 1150, DENVER, CO 80290 303-863-1555

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FSL 1980' FWL Sec 10 T21S R26E NM PM

5. Lease Designation and Serial No
NM3606

6. If Indian, Allottee or Tribe Name
NA

7. If Unit or CA, Agreement Designation

8. Well Name and No.
Avalon 10 Federal #23

9. API Well No.
30-015-31545

10. Field and Pool, or Exploratory Area
Undes. Catclaw Draw Delaware E

11. County or Parish, State

Eddy County, NM, NM PM

12. CHECK APPROPRIATE BOX(es) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Status
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.

2/08/01. MIRU Spud well. Drill 17 1/2" hole to 640'. 2/13/00 RU & ran 14 jts 13 3/8" 54.5# J-55 casing set @ 640', Cemented w/ 350 sx35:65 Poz 'C' cmt + additives. Followed by 200 sx Cl-C cmt, Circ 125 sx to pit. WOC. NU BOPE & test to 1000#, OK. Tag cement @ 581'. Drill 12 1/4" hole ahead to 1845'. 2/13/01 RU & ran 40 jts 8 5/8" 32# J-55 casing landed @ 1845'. Cemented 8 5/8" casing w/a lead of 200 sx cl-H + additives & followed w/400 sx cl-C + additives & tailed w/200 sx Cl-'C'. Circ 49 sx to pit. Cmt fell back. Ran temp survey, TOC @ 574'. Did 1" job of 48 sx Cl-'C'. WOC. NU BOPE & test to 3000# & csg pressured to 1500 psi. OK. Drill 8 3/4" hole to TD @ 4361' on 2/19/01. Logged well. 2/21/01 RU & ran 100 jts 5 1/2" 17# J-55 casing set @ 4361'. Cemented 5 1/2" casing with 450 sx Super 'C'. Rig released 11 pm 2/21/01. WOCU

14. I hereby certify that the foregoing is true and correct
Signed David R. Glass

Title ENGINEERING TECHNICIAN

Date 05/04/01

(This space for Federal or State office use)

Approved by _____


Title _____

Date _____

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

*See Instructions on Reverse Side

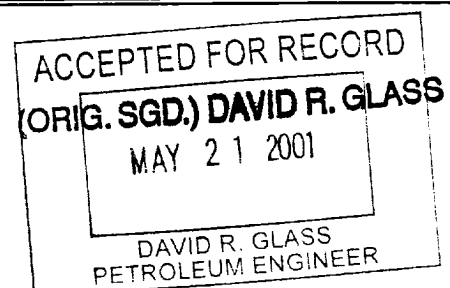

RECEIVED

2001 MAY -9 AM 8:45

BUREAU OF LAND MGMT
FOSWELL OFFICE