


Operator El Paso Exploration Company			Lease Pecos Federal		Well No. 2
Unit Letter G	Section 27	Township 26 South	Range 29 East	County Eddy	
Actual Footage Location of Well;					
1980 feet from the North line and		2030 feet from the East line			
Ground Level Elev. 2877.3	Producing Formation		Pool		Dedicated Acreage: Acres

1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Division.

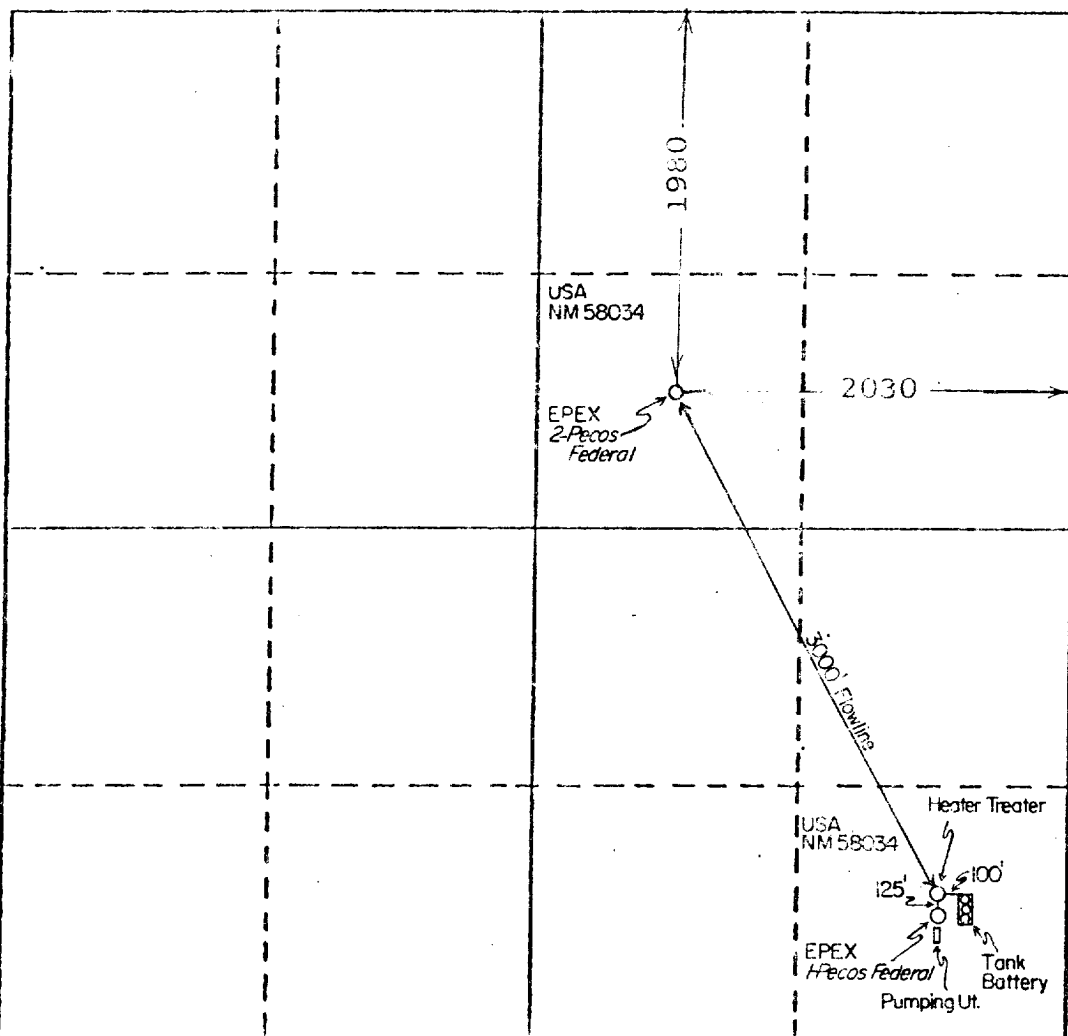

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Name _____

Position _____

Company _____

Date _____

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed

6-24-1985


Registered Professional Engineer and/or Land Surveyor


Truman Gaskin

Truman Gaskin

Certificate No.

2125



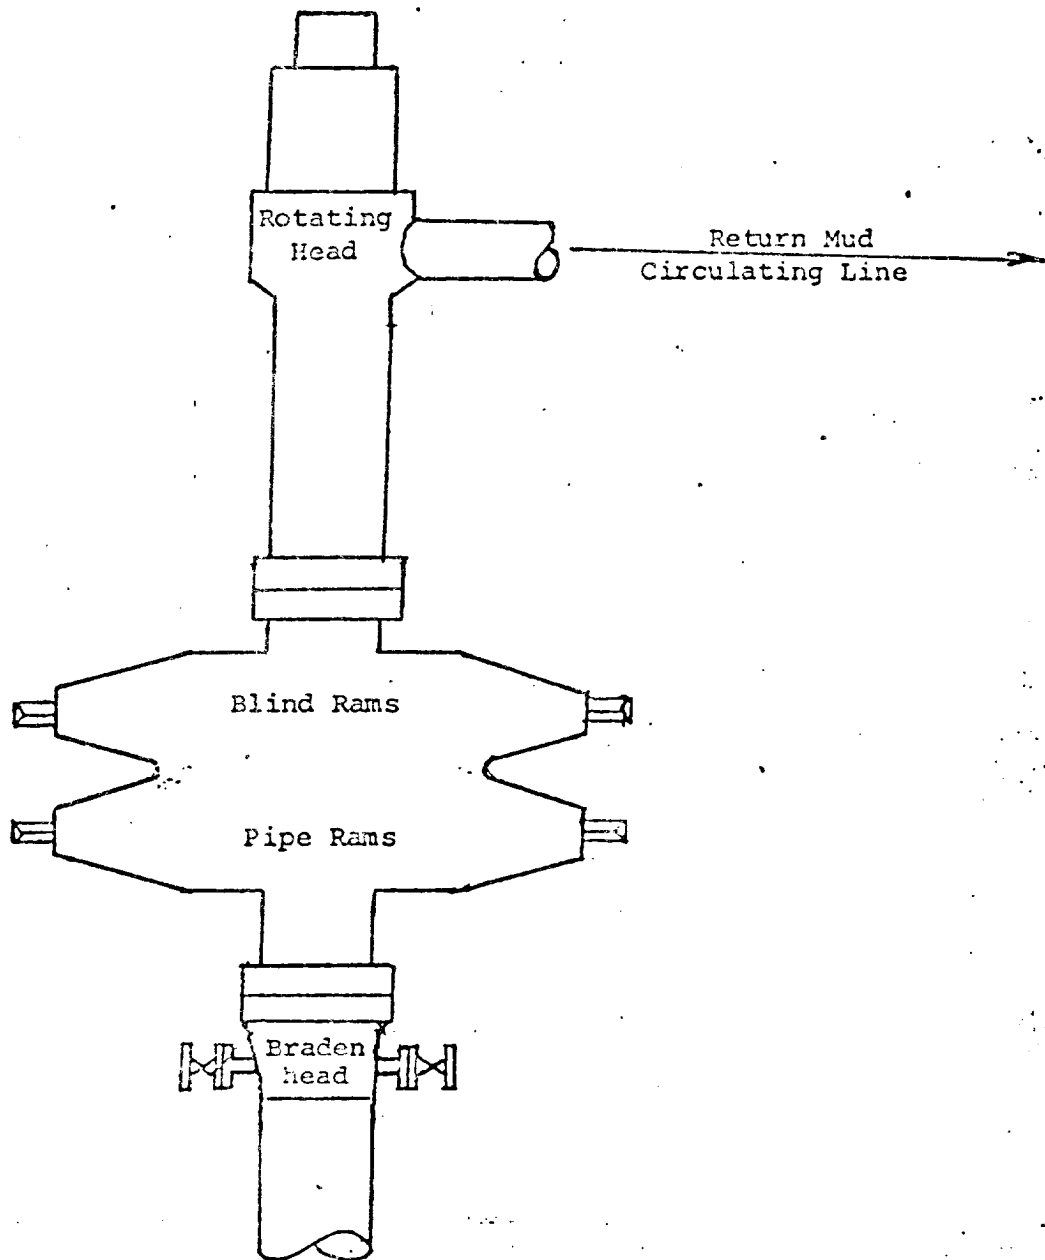

WELLHEAD BOP STACK

Test to 3000 psi Working Pressure

OPERATION PLAN

Pecos Federal #2

I. Location

1980' FNL and 2030' FEL, Sec. 27, T26S, R29E

Field Brushy Draw

Elevation 2877' GL

II. Geology

A. Formation Tops:

Lamar Lime 2880'

Bell Canyon 2910'

Cherry Canyon 3780'

Brushy Canyon 5160'

B. Logging Program:

Compensated Density-Neutron Dual
Lateral Log

C. Coring Program:

None

III. Drilling

Mud Program

Mud from surface to total depth, 5500'

IV. Material

0-400' Fresh water

A. Casing Program:

<u>Hole Size</u>	<u>Depth</u>	<u>Csg. Size</u>	<u>Wt. & Gr.</u>
17 1/8"	400'	13 3/8"	48# H-40
11"	2900'	8 5/8"	32# K-55
7 7/8"	5500'	4 1/2"	9.5# K-55

B. Floating Equipment:


13 3/8" Surface Casing	Insert-Texas Pattern Shoe	2 Centralizers
8 5/8" Intermediate	Float Collar-Guide Shoe	4 Centralizers
4 1/2" Production	Float Collar-Guide Shoe	10 Centralizers

C. Tubing:

5000' of 2 3/8" 4.7# J-55

D. Well Head Equipment:

Casinghead 13 3/8" x 8 5/8" 2000 psi W.P.
Casinghead 8 5/8" x 4 1/2" 2000 psi W.P.
Casinghead 4 1/2" x 2 3/8" 2000 psi W.P.

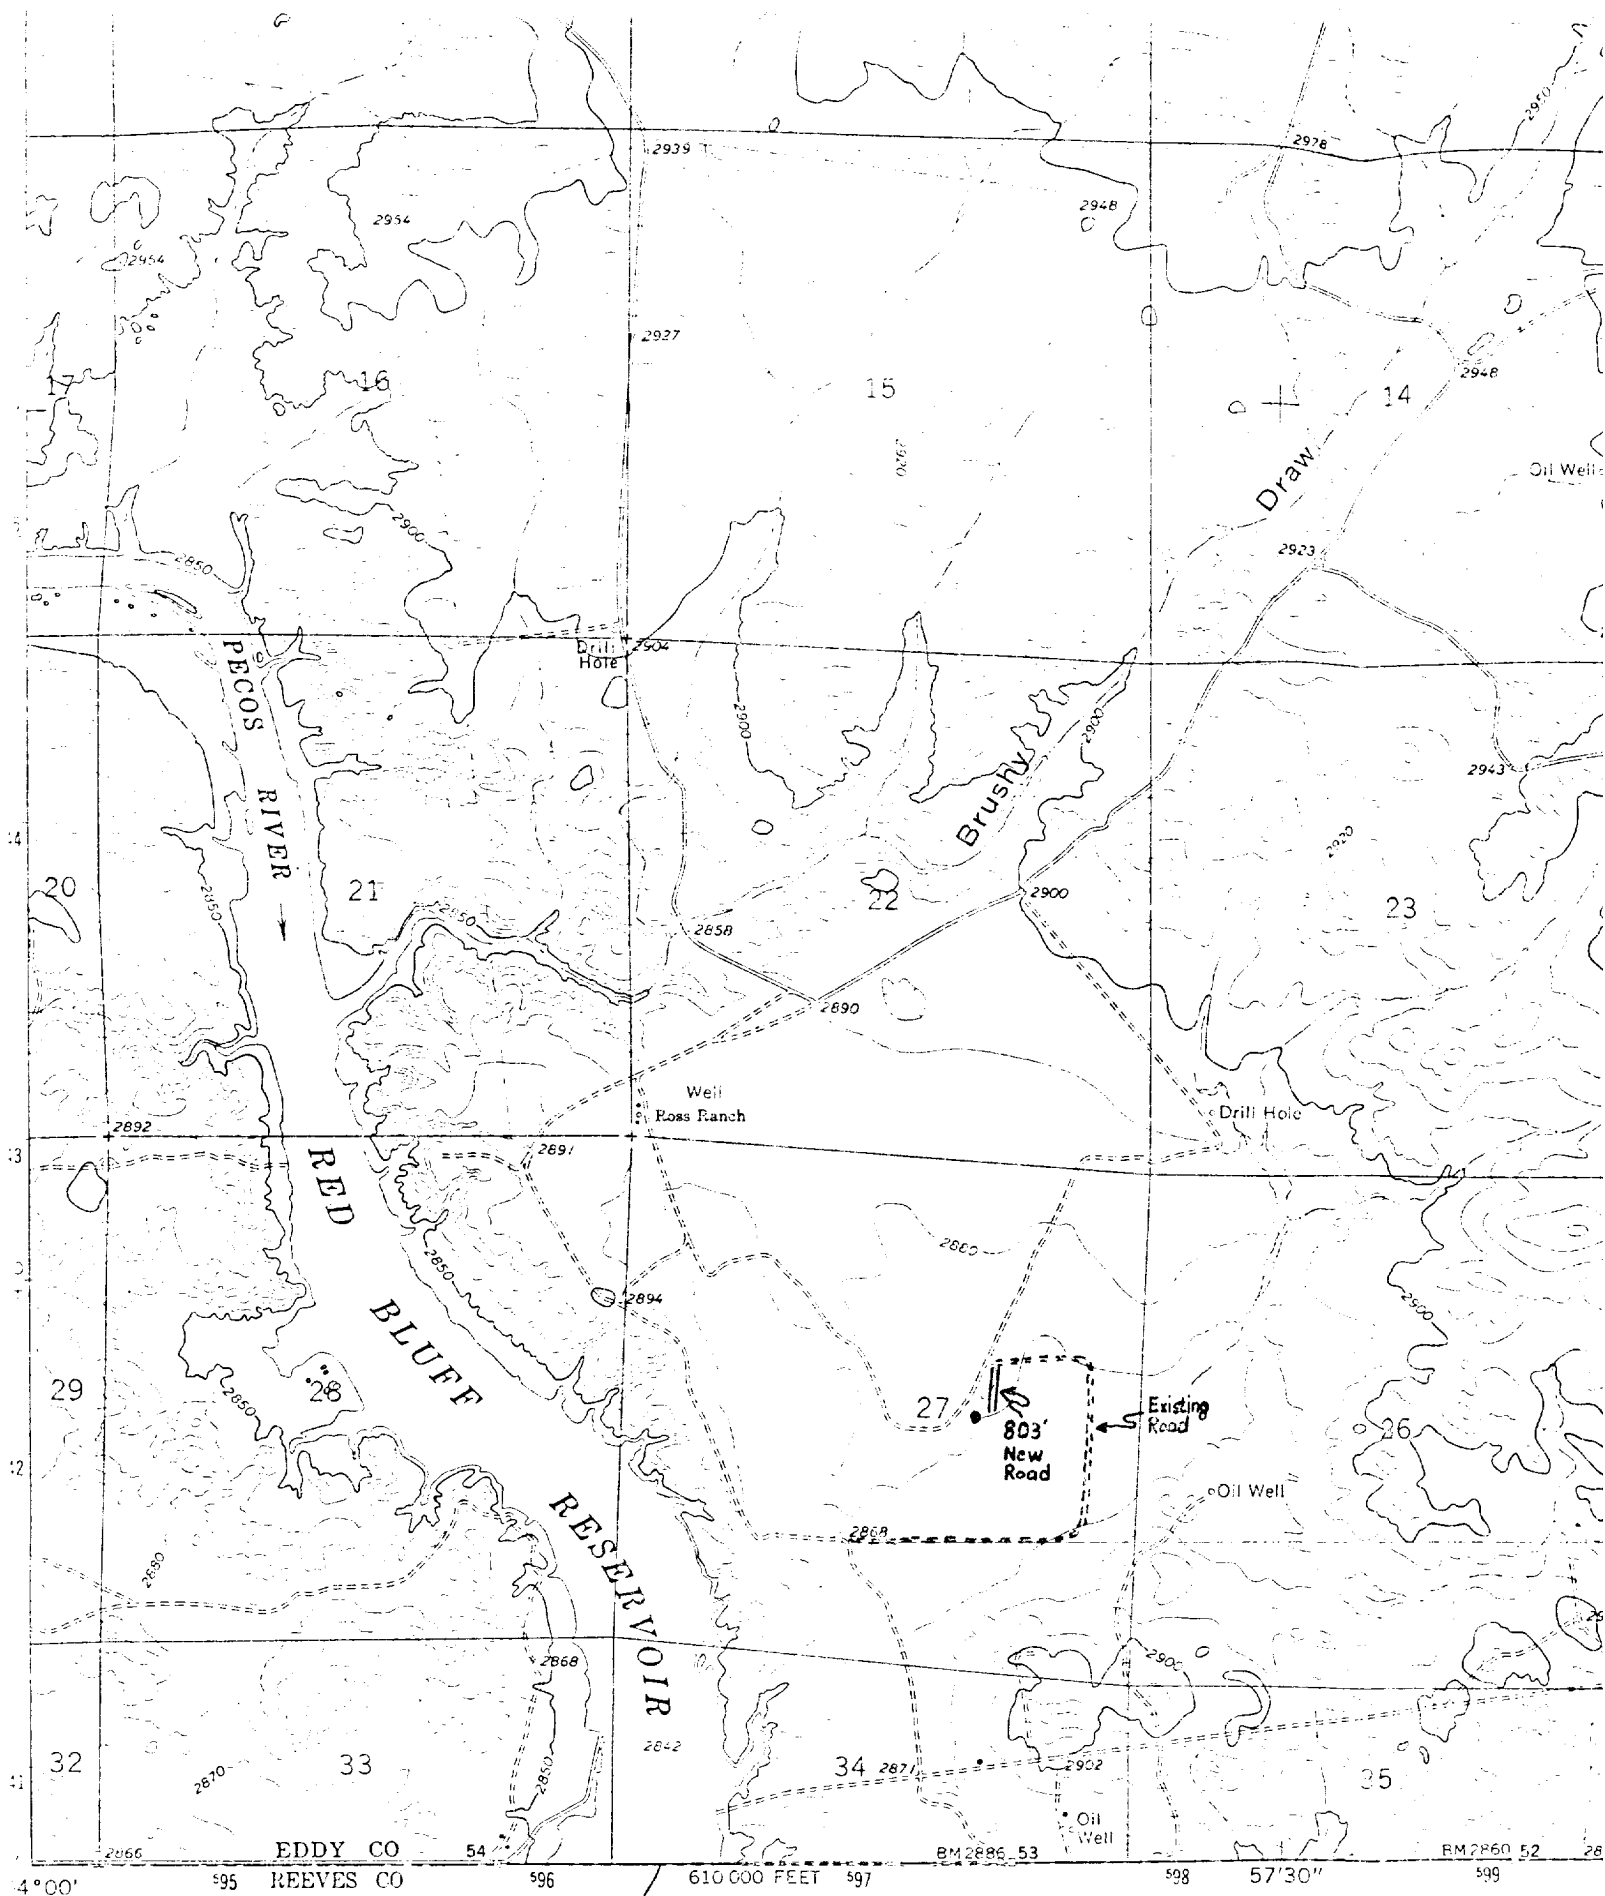

Mapped, edited, and published by the Geological Survey
Control by USGS and UCC&GS

★ MAP #1

