

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

FORM APPROVED
OMB NO 1004-0137
Expires July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS

JUN 17 2011

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

Farmington Field Office
Bureau of Land Management

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Energen Resources Corporation

3a. Address

2010 Afton Place, Farmington, NM 87401

3b. Phone No. (include area code)

(505) 325-6800

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Surface: 990' FSL, 820' FWL Sec. 21, T32N, R04W (M) SW/SW
708' 503'

BHL: 692' FSL 531' FWL Sec. 20, T32N, R04W (M) SW/SW

5. Lease Serial No.

NMNM 28277

6. If Indian, Allottee or Tribe Name

Farmington Field Office
Bureau of Land Management

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Arboles 20A # 10

9. API Well No.

30-039-30291

10. Field and Pool, or Exploratory Area

Basin Fruitland Coal

11. County or Parish, State

Rio Arriba NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent☒ Subsequent Report☐ Final Abandonment Notice

TYPE OF ACTION

☐ Acidize☐ Alter Casing☐ Casing Repair☐ Change Plans☐ Convert to Injection☐ Deepen☐ Fracture Treat☐ New Construction☐ Plug and Abandon☐ Plug Back☐ Production (Start/Resume)☐ Reclamation☐ Recomplete☐ Temporarily Abandon☐ Water Disposal☐ Water Shut-Off☐ Well Integrity☒ Other productionliner & killstringtubing

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

6/9/2011: TD @ 9,100' PBTD @ 8,999' Drill 6.25" hole to 9,100'. Run 98 jts. of 4.50" production liner, set @ 9,099'. TOL @ 4,965'. No cement

Run 147 jts. of 2.375" 4.7# J-55 killstring tubing, set @ 4,463'. ND BOP. Rig release @ 6:00 am on 6/11/11. W

ACCEPTED FOR RECORD

JUN 21 2011

FARMINGTON FIELD OFFICE
BY SCV

RCVD JUN 22 '11

OIL CONS. DIV.

DIST. 3

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Andrew Soto

Title Drilling Engineer

Signature

Date 6/15/10

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon

Office

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NMOCD W

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised October 12, 2005
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-039-30291	² Pool Code 71629	³ Pool Name Basin Fruitland Coal
⁴ Property Code	⁵ Property Name Arboles 20A	⁶ Well Number 10
⁷ OGRID No. 162928	⁸ Operator Name ENERGEN RESOURCES CORPORATION	⁹ Elevation 7,396'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	21	32N	04W		990'	South	820'	West	Rio Arriba

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	20	32N	04W		692'	South	531'	West	Rio Arriba

¹² Dedicated Acres	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. R-13119
-------------------------------	-------------------------------	----------------------------------	------------------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

¹⁶ See Revised C-102 17 16 20 21 BHL 531' 692' EP 706' 869' 820' SHL 990'	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.  6/16/11 Signature Date Andrew Soto Printed Name
	¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. March 24, 2009 Date of Survey Original Survey Conducted and Recorded By: David R. Russell 10201 Certificate Number

Energen Resources

Rio Arriba County

Carracas Mesa

Arboles 20A #10

Wellbore #1

Design: Wellbore #1

Standard Survey Report


16 June, 2011

Arboles 20A #10
Rio Arriba Co. NM

GL: 7395' / KB: 15'


WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
LAND-20A	4200.0	-284.2	-1688.6	2172832.85	1341844.09	Point
TD-20A	4200.0	-297.8	-5568.6	2172819.31	1337964.07	Point

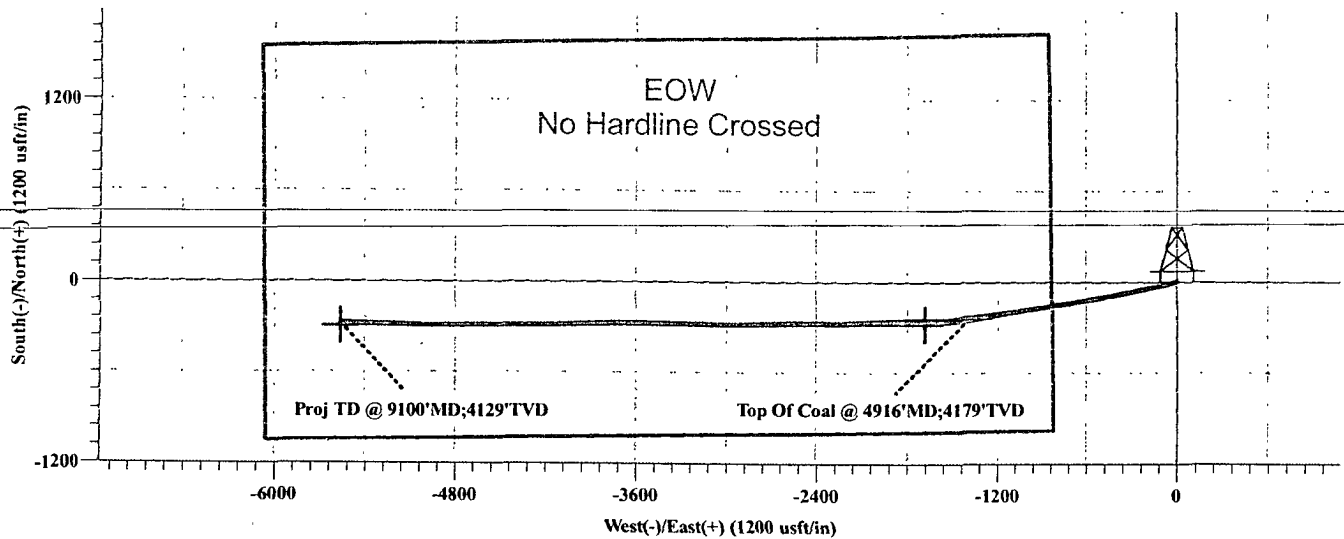

WELL DETAILS: Arboles 20A #10

		7395.0	
Northing	Easting	Latitude	Longitude
2173117.10	1343532.65	36° 58' 3.684 N	107° 15' 58.572 W

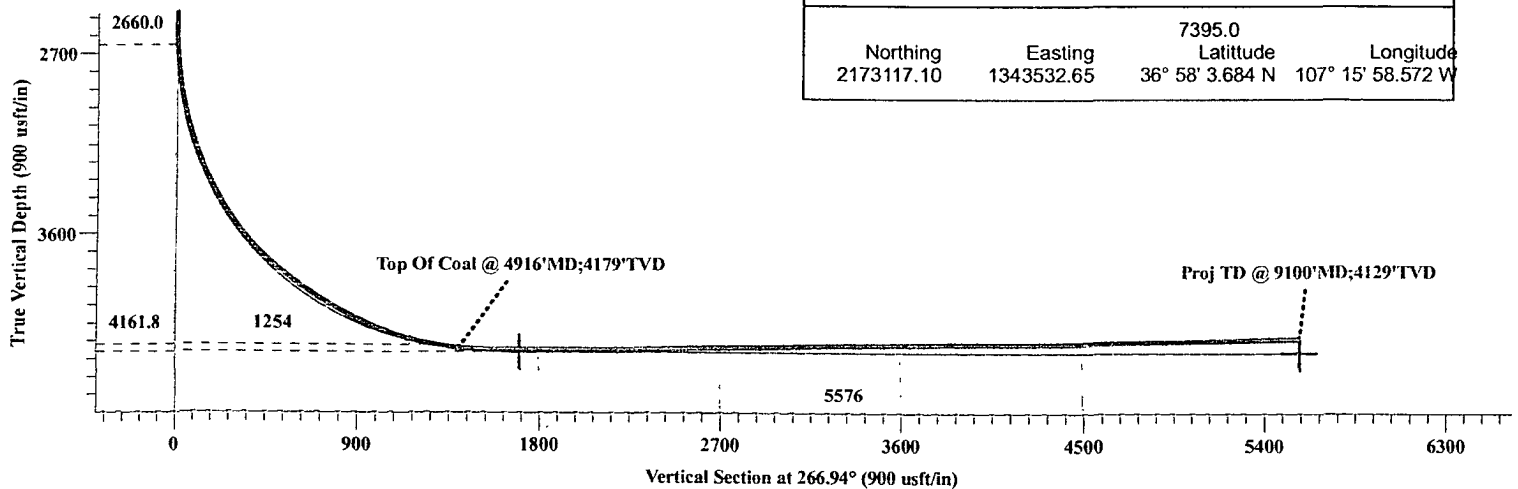

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
2660.0	0.00	0.00	2660.0	0.0	0.0	0.00	0.00	0.0	
4794.8	80.28	259.03	4161.8	-241.0	-1243.2	3.76	259.03	1254.3	
5245.1	90.00	269.80	4200.0	-284.2	-1688.6	3.21	48.41	1701.3	LAND-20A
9124.9	90.00	269.80	4200.0	-297.8	-5568.4	0.00	0.00	5576.3	

Plan: Design #1 (Arboles 20A #10/Wellbore #1)

Created By: Frank C. Scardino

Date: 6/16/2011

Survey Report

Company: Energen Resources
 Project: Rio Arriba County
 Site: Carracas Mesa
 Well: Arboles 20A #10
 Wellbore: Wellbore #1
 Design: Wellbore #1

Local Co-ordinate Reference: Well Arboles 20A #10
 TVD Reference: WELL @ 7410.0usft (Original Well Elev)
 MD Reference: WELL @ 7410.0usft (Original Well Elev)
 North Reference: Gnd
 Survey Calculation Method: Minimum Curvature
 Database: EDM 5000.1 Single User Db

Project	Rio Arriba County		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Central Zone		

Site	Carracas Mesa		
Site Position:		Northing:	2,173,117.10 usft
From:	Map	Easting:	1,343,532.65 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	36° 58' 3.684 N
		Longitude:	107° 15' 58.572 W
		Grid Convergence:	-0.61 °

Well	Arboles 20A #10		
Well Position	+N/-S	0.0 usft	Northing:
	+E/-W	0.0 usft	Easting:
Position Uncertainty	0.0 usft	Wellhead Elevation:	usft
		Latitude:	36° 58' 3.684 N
		Longitude:	107° 15' 58.572 W
		Ground Level:	-7,395.0 usft

Wellbore	Wellbore #1		
Magnetics	Model Name	Sample Date	Declination
	IGRF2010	06/16/11	(°)
			9.71
			Dip Angle
			(°)
			63.75
			Field Strength
			(nT)
			50,923

Design	Wellbore #1		
Audit Notes:			
Version:	1.0	Phase:	ACTUAL
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.0	0.0	0.0
			Direction
			(°)
			266.94

Survey Program	Date 06/16/11		
From	To	Survey (Wellbore)	Tool Name
(usft)	(usft)		
272.0	9,100.0	Survey #1 (Wellbore #1)	MWD
			Description
			MWD - Standard

Survey									
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Vertical	Dogleg	Build	Turn
Depth	(°)	(°)	Depth	(usft)	(usft)	Section	Rate	Rate	Rate
(usft)			(usft)			(usft)	(°/100usft)	(°/100usft)	(°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
272.0	0.44	296.73	272.0	0.5	-0.9	0.9	0.16	0.16	0.00
363.0	0.06	139.49	363.0	0.6	-1.2	1.2	0.54	-0.42	-172.79
456.0	0.09	214.88	456.0	0.5	-1.2	1.2	0.10	0.03	81.06
547.0	0.10	165.88	547.0	0.4	-1.2	1.2	0.09	0.01	-53.85
636.0	0.11	208.81	636.0	0.2	-1.3	1.3	0.09	0.01	48.24
727.0	0.14	33.05	727.0	0.2	-1.2	1.2	0.27	0.03	-193.14
819.0	0.04	195.85	819.0	0.3	-1.2	1.2	0.19	-0.11	176.96
909.0	0.14	7.99	909.0	0.4	-1.2	1.2	0.20	0.11	191.27
1,000.0	0.12	343.08	1,000.0	0.6	-1.2	1.2	0.07	-0.02	-27.37

Survey Report

Company: Energen Resources
 Project: Rio Arriba County
 Site: Carracas Mesa
 Well: Arboles 20A #10
 Wellbore: Wellbore #1
 Design: Wellbore #1

Local Co-ordinate Reference: Well Arboles 20A #10
 TVD Reference: WELL @ 7410.0usft (Original Well Elev)
 MD Reference: WELL @ 7410.0usft (Original Well Elev)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Database: EDM 5000 1 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
1,094.0	0.06	291.79	1,094.0	0.7	-1.3	1.2	0.10	-0.06	-54.56
1,183.0	0.10	339.08	1,183.0	0.8	-1.3	1.3	0.08	0.04	53.13
1,274.0	0.09	174.77	1,274.0	0.8	-1.4	1.3	0.21	-0.01	-180.56
1,367.0	0.09	118.23	1,367.0	0.7	-1.3	1.3	0.09	0.00	-60.80
1,461.0	0.09	179.74	1,461.0	0.6	-1.2	1.2	0.10	0.00	65.44
1,557.0	0.03	213.48	1,557.0	0.5	-1.2	1.2	0.07	-0.06	35.15
1,652.0	0.09	197.51	1,652.0	0.4	-1.3	1.3	0.06	0.06	-16.81
1,748.0	0.12	160.52	1,748.0	0.2	-1.3	1.3	0.08	0.03	-38.53
1,842.0	0.06	93.87	1,842.0	0.1	-1.2	1.2	0.12	-0.06	-70.90
1,938.0	0.10	15.16	1,938.0	0.2	-1.1	1.1	0.11	0.04	-81.99
2,033.0	0.15	224.49	2,033.0	0.2	-1.2	1.2	0.25	0.05	-158.60
2,128.0	0.23	128.21	2,128.0	0.0	-1.1	1.1	0.30	0.08	-101.35
2,224.0	0.06	137.19	2,224.0	-0.2	-0.9	0.9	0.18	-0.18	9.35
2,320.0	0.09	27.27	2,320.0	-0.2	-0.9	0.9	0.13	0.03	-114.50
2,415.0	0.06	301.38	2,415.0	-0.1	-0.9	0.9	0.11	-0.03	-90.41
2,511.0	0.06	284.14	2,511.0	0.0	-1.0	1.0	0.02	0.00	-17.96
2,607.0	0.84	264.40	2,607.0	-0.1	-1.7	1.7	0.82	0.81	-20.56
2,671.0	3.47	258.55	2,670.9	-0.5	-4.1	4.1	4.12	4.11	-9.14
2,734.0	4.84	256.59	2,733.8	-1.5	-8.5	8.6	2.19	2.17	-3.11
2,797.0	6.73	253.31	2,796.4	-3.2	-14.7	14.8	3.04	3.00	-5.21
2,861.0	9.50	250.11	2,859.8	-6.1	-23.2	23.5	4.38	4.33	-5.00
2,925.0	11.48	250.23	2,922.7	-10.0	-34.2	34.7	3.09	3.09	0.19
2,988.0	12.87	251.14	2,984.3	-14.4	-46.7	47.4	2.23	2.21	1.44
3,020.0	14.28	254.15	3,015.4	-16.6	-53.9	54.7	4.93	4.41	9.41
3,052.0	15.41	256.52	3,046.3	-18.7	-61.8	62.7	4.01	3.53	7.41
3,116.0	17.92	260.03	3,107.7	-22.4	-79.8	80.9	4.22	3.92	5.48
3,180.0	20.77	259.32	3,168.0	-26.2	-100.6	101.9	4.47	4.45	-1.11
3,212.0	21.60	259.15	3,197.9	-28.4	-112.0	113.4	2.60	2.59	-0.53
3,244.0	22.70	257.96	3,227.5	-30.8	-123.8	125.3	3.71	3.44	-3.72
3,276.0	23.62	257.20	3,256.9	-33.5	-136.1	137.7	3.02	2.88	-2.38
3,306.0	24.51	256.84	3,284.3	-36.2	-148.0	149.8	3.01	2.97	-1.20
3,338.0	26.12	256.55	3,313.3	-39.4	-161.4	163.2	5.05	5.03	-0.91
3,369.0	27.65	256.76	3,340.9	-42.6	-175.0	177.0	4.94	4.94	0.68
3,401.0	28.58	256.54	3,369.1	-46.1	-189.7	191.9	2.92	2.91	-0.69
3,433.0	29.76	256.95	3,397.1	-49.7	-204.8	207.2	3.74	3.69	1.28
3,465.0	30.51	257.08	3,424.7	-53.3	-220.5	223.0	2.35	2.34	0.41
3,497.0	31.69	257.08	3,452.1	-57.0	-236.6	239.3	3.69	3.69	0.00
3,529.0	32.59	257.56	3,479.2	-60.7	-253.2	256.1	2.92	2.81	1.50
3,561.0	33.37	257.78	3,506.1	-64.4	-270.2	273.3	2.47	2.44	0.69
3,592.0	34.71	257.63	3,531.8	-68.1	-287.2	290.4	4.33	4.32	-0.48
3,624.0	36.46	258.65	3,557.8	-71.9	-305.4	308.8	5.77	5.47	3.19
3,656.0	38.12	259.18	3,583.2	-75.7	-324.4	328.0	5.28	5.19	1.66
3,688.0	39.49	259.94	3,608.2	-79.3	-344.2	347.9	4.53	4.28	2.38
3,720.0	41.00	260.01	3,632.6	-82.9	-364.5	368.4	4.72	4.72	0.22

Survey Report

Company: Energen Resources
 Project: Rio Arriba County
 Site: Carracas Mesa
 Well: Arboles 20A #10
 Wellbore: Wellbore #1
 Design: Wellbore #1

Local Co-ordinate Reference: Well Arboles 20A #10
 TVD Reference: WELL @ 7410.0usft (Original Well Elev)
 MD Reference: WELL @ 7410.0usft (Original Well Elev)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Database: EDM 5000 1 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
3,752.0	42.70	260.10	3,656.4	-86.6	-385.5	389.6	5.32	5.31	0.28
3,784.0	44.14	259.77	3,679.7	-90.4	-407.2	411.4	4.56	4.50	-1.03
3,816.0	45.43	259.43	3,702.4	-94.5	-429.4	433.8	4.10	4.03	-1.06
3,848.0	46.65	259.20	3,724.6	-98.8	-452.0	456.6	3.85	3.81	-0.72
3,880.0	47.89	258.91	3,746.3	-103.2	-475.1	479.9	3.93	3.88	-0.91
3,912.0	49.13	259.44	3,767.5	-107.7	-498.6	503.7	4.07	3.88	1.66
3,943.0	50.46	259.73	3,787.5	-112.0	-521.9	527.1	4.35	4.29	0.94
3,975.0	51.46	259.78	3,807.7	-116.4	-546.4	551.8	3.13	3.13	0.16
4,007.0	52.23	260.09	3,827.5	-120.8	-571.1	576.8	2.52	2.41	0.97
4,038.0	52.97	260.39	3,846.3	-125.0	-595.4	604.2	2.51	2.39	0.97
4,070.0	53.69	260.77	3,865.4	-129.2	-620.7	626.7	2.44	2.25	1.19
4,096.0	54.31	261.61	3,880.7	-132.4	-641.5	647.7	3.54	2.38	3.23
4,128.0	55.37	261.27	3,899.1	-136.3	-667.4	673.7	3.42	3.31	-1.06
4,160.0	56.79	261.79	3,917.0	-140.2	-693.7	700.2	4.64	4.44	1.63
4,192.0	57.86	261.91	3,934.2	-144.0	-720.3	727.0	3.36	3.34	0.38
4,224.0	59.47	262.12	3,950.9	-147.8	-747.4	754.2	5.06	5.03	0.66
4,256.0	60.05	261.81	3,967.0	-151.7	-774.8	781.8	2.00	1.81	-0.97
4,288.0	60.70	261.17	3,982.8	-155.8	-802.3	809.4	2.67	2.03	-2.00
4,319.0	61.73	260.38	3,997.7	-160.2	-829.1	836.5	4.00	3.32	-2.55
4,351.0	63.18	260.15	4,012.5	-165.0	-857.1	864.6	4.58	4.53	-0.72
4,383.0	63.93	260.62	4,026.8	-169.8	-885.3	893.1	2.69	2.34	1.47
4,415.0	64.62	260.98	4,040.7	-174.4	-913.8	921.8	2.38	2.16	1.13
4,447.0	65.46	261.05	4,054.2	-178.9	-942.4	950.6	2.63	2.63	0.22
4,479.0	66.73	261.09	4,067.2	-183.4	-971.3	979.7	3.97	3.97	0.13
4,510.0	67.82	261.18	4,079.1	-187.8	-999.6	1,008.2	3.53	3.52	0.29
4,542.0	68.88	261.50	4,090.9	-192.3	-1,029.0	1,037.8	3.44	3.31	1.00
4,574.0	69.81	261.81	4,102.2	-196.7	-1,058.6	1,067.6	3.04	2.91	0.97
4,606.0	70.73	261.93	4,113.0	-200.9	-1,088.4	1,097.6	2.90	2.88	0.38
4,638.0	71.73	262.27	4,123.3	-205.1	-1,118.4	1,127.8	3.28	3.13	1.06
4,670.0	73.13	262.43	4,133.0	-209.2	-1,148.7	1,158.2	4.40	4.38	0.50
4,702.0	74.81	262.89	4,141.8	-213.1	-1,179.2	1,188.9	5.43	5.25	1.44
4,734.0	76.61	263.22	4,149.7	-216.8	-1,209.9	1,219.8	5.71	5.63	1.03
4,766.0	78.11	262.95	4,156.7	-220.6	-1,240.9	1,250.9	4.76	4.69	-0.84
4,798.0	79.54	262.63	4,162.9	-224.5	-1,272.1	1,282.3	4.58	4.47	-1.00
4,829.0	81.22	262.76	4,168.1	-228.4	-1,302.4	1,312.7	5.44	5.42	0.42
4,861.0	83.22	263.13	4,172.4	-232.3	-1,333.9	1,344.4	6.35	6.25	1.16
4,893.0	83.66	263.04	4,176.1	-236.1	-1,365.4	1,376.1	1.40	1.38	-0.28
4,916.0	83.84	262.69	4,178.6	-239.0	-1,388.1	1,398.9	1.73	0.80	-1.54
Top Of Coal @ 4916 MD; 4179 TVD									
4,928.0	83.94	262.50	4,179.9	-240.5	-1,399.9	1,410.8	1.73	0.80	-1.54
4,957.0	85.44	262.50	4,182.5	-244.3	-1,428.6	1,439.6	5.17	5.17	0.00
4,984.0	87.08	263.12	4,184.3	-247.7	-1,455.3	1,466.4	6.49	6.07	2.30
5,078.0	89.96	266.98	4,186.7	-255.8	-1,548.9	1,560.3	5.12	3.06	4.11

Survey Report

Company: Energen Resources
 Project: Rio Arriba County
 Site: Carracas Mesa
 Well: Arboles 20A #10
 Wellbore: Wellbore #1
 Design: Wellbore #1

Local Co-ordinate Reference: Well Arboles 20A #10
 TVD Reference: WELL @ 7410.0usft (Original Well Elev)
 MD Reference: WELL @ 7410.0usft (Original Well Elev)
 North Reference: Gnd
 Survey Calculation Method: Minimum Curvature
 Database: EDM 5000.1 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,110.0	90.13	269.75	4,186.7	-256.7	-1,580.9	1,592.3	8.67	0.53	8.66
5,142.0	90.92	271.75	4,186.4	-256.3	-1,612.9	1,624.2	6.72	2.47	6.25
5,173.0	89.87	269.83	4,186.2	-255.8	-1,643.9	1,655.2	7.06	-3.39	-6.19
5,205.0	90.48	268.46	4,186.1	-256.3	-1,675.9	1,687.1	4.69	1.91	-4.28
5,237.0	90.31	268.01	4,185.9	-257.3	-1,707.8	1,719.1	1.50	-0.53	-1.41
5,269.0	89.60	268.26	4,185.9	-258.3	-1,739.8	1,751.1	2.35	-2.22	0.78
5,301.0	89.43	268.39	4,186.2	-259.3	-1,771.8	1,783.1	0.67	-0.53	0.41
5,333.0	89.96	268.77	4,186.4	-260.1	-1,803.8	1,815.1	2.04	1.66	1.19
5,364.0	90.57	269.19	4,186.2	-260.6	-1,834.8	1,846.1	2.39	1.97	1.35
5,396.0	90.75	268.76	4,185.8	-261.2	-1,866.8	1,878.1	1.46	0.56	-1.34
5,428.0	90.66	267.71	4,185.4	-262.2	-1,898.8	1,910.0	3.29	-0.28	-3.28
5,460.0	90.22	266.41	4,185.2	-263.8	-1,930.7	1,942.0	4.29	-1.38	-4.06
5,491.0	89.34	265.26	4,185.3	-266.1	-1,961.6	1,973.0	4.67	-2.84	-3.71
5,523.0	89.87	265.54	4,185.5	-268.6	-1,993.5	2,005.0	1.87	1.66	0.88
5,555.0	90.31	267.55	4,185.5	-270.6	-2,025.5	2,037.0	6.43	1.38	6.28
5,584.0	90.31	267.56	4,185.3	-271.8	-2,054.4	2,066.0	0.03	0.00	0.03
5,615.0	90.48	268.15	4,185.1	-273.0	-2,085.4	2,097.0	1.98	0.55	1.90
5,645.0	90.04	268.01	4,185.0	-274.0	-2,115.4	2,127.0	1.54	-1.47	-0.47
5,675.0	89.69	267.93	4,185.1	-275.0	-2,145.4	2,157.0	1.20	-1.17	-0.27
5,707.0	89.87	267.91	4,185.2	-276.2	-2,177.4	2,189.0	0.57	0.56	-0.06
5,738.0	89.52	267.72	4,185.3	-277.4	-2,208.3	2,220.0	1.28	-1.13	-0.61
5,768.0	89.52	268.10	4,185.6	-278.5	-2,238.3	2,250.0	1.27	0.00	1.27
5,799.0	90.22	269.21	4,185.7	-279.2	-2,269.3	2,281.0	4.23	2.26	3.58
5,829.0	90.84	269.95	4,185.4	-279.4	-2,299.3	2,310.9	3.22	2.07	2.47
5,860.0	91.89	271.29	4,184.6	-279.1	-2,330.3	2,341.9	5.49	3.39	4.32
5,891.0	92.51	271.42	4,183.5	-278.3	-2,361.3	2,372.8	2.04	2.00	0.42
5,922.0	91.98	270.77	4,182.2	-277.7	-2,392.2	2,403.7	2.70	-1.71	-2.10
5,952.0	92.24	270.84	4,181.1	-277.3	-2,422.2	2,433.6	0.90	0.87	0.23
5,982.0	92.15	270.46	4,180.0	-277.0	-2,452.2	2,463.5	1.30	-0.30	-1.27
6,013.0	91.71	270.06	4,178.9	-276.8	-2,483.2	2,494.4	1.92	-1.42	-1.29
6,043.0	90.92	268.82	4,178.3	-277.1	-2,513.2	2,524.4	4.90	-2.63	-4.13
6,073.0	91.10	269.41	4,177.7	-277.6	-2,543.2	2,554.3	2.06	0.60	1.97
6,104.0	91.45	269.57	4,177.0	-277.9	-2,574.1	2,585.3	1.24	1.13	0.52
6,134.0	91.54	269.61	4,176.3	-278.1	-2,604.1	2,615.3	0.33	0.30	0.13
6,165.0	91.10	269.32	4,175.5	-278.4	-2,635.1	2,646.2	1.70	-1.42	-0.94
6,196.0	90.40	269.05	4,175.1	-278.8	-2,666.1	2,677.2	2.42	-2.26	-0.87
6,227.0	90.22	268.18	4,175.0	-279.6	-2,697.1	2,708.2	2.87	-0.58	-2.81
6,257.0	89.52	267.04	4,175.0	-280.8	-2,727.1	2,738.2	4.46	-2.33	-3.80
6,288.0	90.31	267.15	4,175.1	-282.4	-2,758.0	2,769.2	2.57	2.55	0.35
6,318.0	90.75	266.78	4,174.8	-284.0	-2,788.0	2,799.2	1.92	1.47	-1.23
6,348.0	90.75	266.92	4,174.4	-285.6	-2,817.9	2,829.2	0.47	0.00	0.47
6,379.0	90.92	268.19	4,174.0	-287.0	-2,848.9	2,860.2	4.13	0.55	4.10
6,409.0	90.66	269.53	4,173.5	-287.5	-2,878.9	2,890.2	4.55	-0.87	4.47
6,439.0	90.92	269.58	4,173.1	-287.8	-2,908.9	2,920.1	0.88	0.87	0.17

Survey Report

Company: Energen Resources
 Project: Rio Arriba County
 Site: Carracas Mesa
 Well: Arboles 20A #10
 Wellbore: Wellbore #1
 Design: Wellbore #1

Local Co-ordinate Reference: Well Arboles 20A #10
 TVD Reference: WELL @ 7410.0usft (Original Well Elev)
 MD Reference: WELL @ 7410.0usft (Original Well Elev)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Database: EDM 5000.1 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
6,470.0	90.92	269.29	4,172.6	-288.1	-2,939.9	2,951.1	0.94	0.00	-0.94
6,500.0	91.36	270.26	4,172.0	-288.2	-2,969.9	2,981.0	3.55	1.47	3.23
6,531.0	91.71	270.56	4,171.2	-288.0	-3,000.9	3,012.0	1.49	1.13	0.97
6,562.0	91.80	270.41	4,170.3	-287.7	-3,031.9	3,042.9	0.56	0.29	-0.48
6,592.0	91.80	269.75	4,169.3	-287.7	-3,061.8	3,072.8	2.20	0.00	-2.20
6,622.0	91.89	270.53	4,168.4	-287.6	-3,091.8	3,102.8	2.62	0.30	2.60
6,653.0	91.28	270.65	4,167.5	-287.3	-3,122.8	3,133.7	2.01	-1.97	0.39
6,684.0	90.84	271.64	4,166.9	-286.7	-3,153.8	3,164.6	3.49	-1.42	3.19
6,715.0	90.75	271.64	4,166.5	-285.8	-3,184.8	3,195.5	0.29	-0.29	0.00
6,744.0	90.92	272.24	4,166.1	-284.8	-3,213.8	3,224.4	2.15	0.59	2.07
6,775.0	91.45	271.88	4,165.4	-283.7	-3,244.7	3,255.3	2.07	1.71	-1.16
6,806.0	91.63	272.32	4,164.6	-282.5	-3,275.7	3,286.1	1.53	0.58	1.42
6,835.0	91.36	272.17	4,163.8	-281.4	-3,304.7	3,315.0	1.06	-0.93	-0.52
6,865.0	91.36	271.26	4,163.1	-280.5	-3,334.7	3,344.9	3.03	0.00	-3.03
6,895.0	90.40	270.61	4,162.7	-280.0	-3,364.6	3,374.8	3.86	-3.20	-2.17
6,925.0	89.87	270.29	4,162.6	-279.8	-3,394.6	3,404.7	2.06	-1.77	-1.07
6,956.0	90.22	270.23	4,162.6	-279.6	-3,425.6	3,435.7	1.15	1.13	-0.19
6,987.0	90.48	270.31	4,162.4	-279.5	-3,456.6	3,466.6	0.88	0.84	0.26
7,016.0	90.75	270.39	4,162.1	-279.3	-3,485.6	3,495.6	0.97	0.93	0.28
7,047.0	90.84	270.12	4,161.6	-279.2	-3,516.6	3,526.5	0.92	0.29	-0.87
7,078.0	90.84	269.96	4,161.2	-279.2	-3,547.6	3,557.5	0.52	0.00	-0.52
7,108.0	91.36	270.66	4,160.6	-279.0	-3,577.6	3,587.4	2.91	1.73	2.33
7,139.0	91.45	270.63	4,159.8	-278.7	-3,608.6	3,618.4	0.31	0.29	-0.10
7,169.0	90.92	270.96	4,159.2	-278.2	-3,638.6	3,648.3	2.08	-1.77	1.10
7,200.0	90.92	270.59	4,158.7	-277.8	-3,669.6	3,679.2	1.19	0.00	-1.19
7,229.0	91.01	269.70	4,158.2	-277.7	-3,698.6	3,708.2	3.08	0.31	-3.07
7,260.0	90.84	269.87	4,157.7	-277.9	-3,729.6	3,739.1	0.78	-0.55	0.55
7,291.0	91.01	269.44	4,157.2	-278.0	-3,760.6	3,770.1	1.49	0.55	-1.39
7,321.0	90.57	268.65	4,156.8	-278.5	-3,790.6	3,800.0	3.01	-1.47	-2.63
7,353.0	89.69	267.93	4,156.8	-279.5	-3,822.6	3,832.0	3.55	-2.75	-2.25
7,383.0	90.75	267.69	4,156.6	-280.7	-3,852.5	3,862.0	3.62	3.53	-0.80
7,414.0	90.57	268.10	4,156.3	-281.8	-3,883.5	3,893.0	1.44	-0.58	1.32
7,446.0	91.19	268.24	4,155.8	-282.8	-3,915.5	3,925.0	1.99	1.94	0.44
7,476.0	90.75	267.99	4,155.3	-283.8	-3,945.5	3,955.0	1.69	-1.47	-0.83
7,508.0	89.87	267.48	4,155.1	-285.1	-3,977.5	3,987.0	3.18	-2.75	-1.59
7,538.0	90.22	267.78	4,155.1	-286.3	-4,007.4	4,017.0	1.54	1.17	1.00
7,569.0	89.78	267.76	4,155.1	-287.5	-4,038.4	4,048.0	1.42	-1.42	-0.06
7,601.0	90.04	267.96	4,155.1	-288.7	-4,070.4	4,080.0	1.03	0.81	0.63
7,632.0	90.04	267.95	4,155.1	-289.8	-4,101.4	4,111.0	0.03	0.00	-0.03
7,663.0	89.78	267.90	4,155.2	-290.9	-4,132.3	4,142.0	0.85	-0.84	-0.16
7,693.0	89.96	267.88	4,155.2	-292.0	-4,162.3	4,172.0	0.60	0.60	-0.07
7,724.0	89.78	268.13	4,155.3	-293.1	-4,193.3	4,203.0	0.99	-0.58	0.81
7,755.0	90.40	270.08	4,155.3	-293.6	-4,224.3	4,233.9	6.60	2.00	6.29

Survey Report

Company: Energen Resources
 Project: Rio Arriba County
 Site: Carracas Mesa
 Well: Arboles 20A #10
 Wellbore: Wellbore #1
 Design: Wellbore #1

Local Co-ordinate Reference: Well Arboles 20A #10
 TVD Reference: WELL @ 7410.0usft (Original Well Elev)
 MD Reference: WELL @ 7410.0usft (Original Well Elev)
 North Reference: Gnd
 Survey Calculation Method: Minimum Curvature
 Database: EDM 5000 1 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
7,786.0	90.13	269.88	4,155.1	-293.6	-4,255.3	4,264.9	1.08	-0.87	-0.65
7,817.0	90.04	269.50	4,155.1	-293.8	-4,286.3	4,295.9	1.26	-0.29	-1.23
7,848.0	90.13	269.53	4,155.0	-294.0	-4,317.3	4,326.8	0.31	0.29	0.10
7,878.0	90.22	269.38	4,154.9	-294.3	-4,347.3	4,356.8	0.58	0.30	-0.50
7,909.0	90.48	269.82	4,154.7	-294.5	-4,378.3	4,387.8	1.65	0.84	1.42
7,940.0	92.33	271.18	4,154.0	-294.3	-4,409.3	4,418.7	7.41	5.97	4.39
7,970.0	92.42	271.06	4,152.7	-293.7	-4,439.3	4,448.6	0.50	0.30	-0.40
8,001.0	91.80	270.28	4,151.6	-293.3	-4,470.2	4,479.5	3.21	-2.00	-2.52
8,032.0	91.36	270.00	4,150.7	-293.2	-4,501.2	4,510.5	1.68	-1.42	-0.90
8,064.0	91.36	269.72	4,150.0	-293.3	-4,533.2	4,542.4	0.87	0.00	-0.88
8,096.0	91.80	270.03	4,149.1	-293.4	-4,565.2	4,574.3	1.68	1.38	0.97
8,128.0	91.54	270.06	4,148.2	-293.4	-4,597.2	4,606.3	0.82	-0.81	0.09
8,160.0	91.45	270.23	4,147.3	-293.3	-4,629.2	4,638.2	0.60	-0.28	0.53
8,192.0	91.10	269.94	4,146.6	-293.2	-4,661.2	4,670.2	1.42	-1.09	-0.91
8,224.0	91.01	269.17	4,146.0	-293.5	-4,693.2	4,702.1	2.42	-0.28	-2.41
8,255.0	91.28	269.24	4,145.4	-293.9	-4,724.1	4,733.1	0.90	0.87	0.23
8,287.0	90.66	269.64	4,144.9	-294.2	-4,756.1	4,765.1	2.31	-1.94	1.25
8,319.0	90.75	269.32	4,144.5	-294.5	-4,788.1	4,797.0	1.04	0.28	-1.00
8,351.0	90.92	269.58	4,144.0	-294.8	-4,820.1	4,829.0	0.97	0.53	0.81
8,382.0	91.19	269.52	4,143.4	-295.1	-4,851.1	4,860.0	0.89	0.87	-0.19
8,414.0	91.36	269.61	4,142.7	-295.3	-4,883.1	4,891.9	0.60	0.53	0.28
8,446.0	91.28	269.62	4,142.0	-295.5	-4,915.1	4,923.9	0.25	-0.25	0.03
8,478.0	91.36	269.45	4,141.2	-295.8	-4,947.1	4,955.8	0.59	0.25	-0.53
8,510.0	91.10	270.69	4,140.6	-295.8	-4,979.1	4,987.8	3.96	-0.81	3.88
8,541.0	90.75	270.99	4,140.1	-295.3	-5,010.1	5,018.7	1.49	-1.13	0.97
8,573.0	90.75	272.01	4,139.6	-294.5	-5,042.1	5,050.6	3.19	0.00	3.19
8,604.0	91.19	272.44	4,139.1	-293.3	-5,073.0	5,081.5	1.98	1.42	1.39
8,636.0	90.84	271.88	4,138.6	-292.1	-5,105.0	5,113.3	2.06	-1.09	-1.75
8,668.0	91.71	271.95	4,137.8	-291.0	-5,137.0	5,145.2	2.73	2.72	0.22
8,700.0	92.07	271.73	4,136.8	-290.0	-5,169.0	5,177.1	1.32	1.13	-0.69
8,732.0	91.63	271.44	4,135.8	-289.1	-5,200.9	5,208.9	1.65	-1.38	-0.91
8,764.0	91.19	271.43	4,135.0	-288.3	-5,232.9	5,240.8	1.38	-1.38	-0.03
8,795.0	90.57	271.56	4,134.5	-287.5	-5,263.9	5,271.7	2.04	-2.00	0.42
8,827.0	90.40	271.63	4,134.2	-286.6	-5,295.9	5,303.6	0.57	-0.53	0.22
8,859.0	91.80	271.54	4,133.6	-285.7	-5,327.9	5,335.5	4.38	4.38	-0.28
8,891.0	91.98	270.61	4,132.5	-285.1	-5,359.8	5,367.4	2.96	0.56	-2.91
8,923.0	92.33	270.80	4,131.3	-284.7	-5,391.8	5,399.3	1.24	1.09	0.59
8,954.0	92.42	270.88	4,130.1	-284.2	-5,422.8	5,430.2	0.39	0.29	0.26
8,986.0	90.75	270.22	4,129.2	-283.9	-5,454.8	5,462.1	5.61	-5.22	-2.06
9,018.0	90.22	271.14	4,128.9	-283.6	-5,486.8	5,494.1	3.32	-1.66	2.88
9,040.0	90.31	271.35	4,128.8	-283.1	-5,508.8	5,516.0	1.04	0.41	0.95
9,100.0	90.31	271.35	4,128.5	-281.7	-5,568.7	5,575.8	0.00	0.00	0.00

Proj TD @ 9100MD;4129TVD

Survey Report

Company: Energen Resources
 Project: Rio Arriba County
 Site: Carracas Mesa
 Well: Arboles 20A #10
 Wellbore: Wellbore #1
 Design: Wellbore #1

Local Co-ordinate Reference: Well Arboles 20A #10
 TVD Reference: WELL @ 7410.0usft (Original Well Elev)
 MD Reference: WELL @ 7410.0usft (Original Well Elev)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Database: EDM 5000.1 Single User Db

Design Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
4,916.0	4,178.6	-239.0	-1,388.1	Top Of Coal @ 4916'MD,4179'TVD
9,100.0	4,128.5	-281.7	-5,568.7	Proj TD @ 9100'MD,4129'TVD

Checked By: _____ Approved By: _____ Date: _____

Revised

"AS DRILLED"

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-102

Revised July 16, 2010

Submit one copy to appropriate

District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-039-30291	² Pool Code 71629	³ Pool Name Basin Fruitland Coal
⁴ Property Code	⁵ Property Name Arboles 20-A	⁶ Well Number 10
⁷ OGRID No. 162928	⁸ Operator Name Energen Resources Corporation	⁹ Elevation 7396'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot 1 dn	Feet from the	North/South line	Feet from the	East/West line	County
M	21	32N	4W		990	South	820	West	Rio Arriba

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot 1 dn	Feet from the	North/South line	Feet from the	East/West line	County
M	20	32N	4W		708	South	503	West	Rio Arriba

¹² Dedicated Acres 320 S/2	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. R-13119
--	-------------------------------	----------------------------------	------------------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

¹⁶	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>Stephen Byers</i> 6-16-11 Signature Date Stephen Byers Printed Name sbyers@energen.com Email Address
	¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. March 24, 2009 Date of Survey Signature and Seal of Professional Surveyor. David R. Russell Certificate Number 10201