1625 N French Dr , Hobbs, NM 88240 District II

1301 W Grand Ave , Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410

State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr.

July 21, 2008 For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

Form C-144

For permanent pits and exceptions submit to the Santa Fe

1220	S.	St	Fı	rancis	Dr.,	Santa	Fe,	NM
$\overline{\leq}$	^		7	2				•

District IV	Santa Fe, INIVI 8/305 For permanent pure and exceptions submit to the Saina Fe Environmental NICCO D. according to the
220 S. St. Francis Dr., Santa Fe, NM 87505	appropriate NMOCD District Office
,, , , , , , , , , , , , , , , , , , ,	sed-Loop System, Below-Grade Tank, or
	ernative Method Permit or Closure Plan Application
Type of action: Permit	of a pit, closed-loop system, below-grade tank, or proposed alternative method
X Closure	e of a pit, closed-loop system, below-grade tank, or proposed alternative method
Modifie	cation to an existing permit
	e plan only submitted for an existing permitted or non-permitted pit, closed-loop system, grade tank, or proposed alternative method
Instructions: Please submit one application	n (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative
	es not relieve the operator of liability should operations result in pollution of surface water, ground water or the of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
I	The separation of comply with approach government addition to the separation of the
Operator: Burlington Resources Oil & Gas Co	mpany, LP OGRID#: 14538
Address: P.O. Box 4289, Farmington, NM 876	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Facility or well name: SAN JUAN 28-6 UNIT 1	102P
API Number. 30-039-30532	OCD Permit Number
U/L or Qtr/Qtr: A(NE/NE) Section. 26	Township: 28N Range 6W County: Rio Arriba
	6.637283 °N Longitude: 107.42853 °W NAD: 1927 X 1983
Surface Owner: X Federal State	e Private Tribal Trust or Indian Allotment
X String-Reinforced	P&A Thickness 12 mil X LLDPE HDPE PVC Other Other Other Volume 4400 bbl Dimensions L 65' x W 45' x D 10'
Closed-loop System: Subsection H of 19 1 Type of Operation P&A Drilling a n	
	ThicknessmilLLDPEHDPEPVDOtherOther
	11 NMAC e of fluid OIL CONS. DIV. DIST. 3
Tank Construction material Secondary containment with leak detection Visible sidewalls and liner Visible Liner Type: Thickness mil	IT NMAC the of fluid Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off the sidewalls only Other HDPE PVC Other
5 Alternative Method:	

Form C-144

Oil Conservation Division

Submittal of an exception request is required Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Page 1 of 5



6	$oldsymbol{t}$						
	Fencing: Subsection D of 19 15 17 11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)						
	Chain link six feet in height two strands of herbed jure at ton / Paraward is located within 1000 Got of a paraward residence, school, hounted, in trust on on abuse)						
	Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet						
	Alternate Please specify						
_							
7	National Control of the Control of t						
	Netting: Subsection E of 19 15 17 11 NMAC (Applies to permanent pits and permanent open top tanks)						
	Screen Netting Other						
	Monthly inspections (If netting or screening is not physically feasible)						
8							
	Signs: Subsection C of 19 15 17 11 NMAC						
	12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19 15 3 103 NMAC						
	X Signed in compilance with 19 15 3 103 NMAC						
9	Administrative Assessment and Providence						
	Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required Please refer to 19 15 17 NMAC for guidance.						
	Please check a box if one or more of the following is requested, if not leave blank:						
	Administrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consi	deration of app	oroval				
	(Fencing/BGT Liner)						
	Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval						
1				l			
·	Siting Criteria (regarding permitting): 19.15.17 10 NMAC			l			
	Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable						
	source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for			l			
	consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria			l			
	does not apply to drying pads or above grade-tanks associated with a closed-loop system.			l			
	Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.	Yes	□No	l			
	- NM Office of the State Engineer - iWATERS database search; USGS, Data obtained from nearby wells			l			
	Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa	Yes	No	l			
	lake (measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site			l			
	Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	∐Yes	∐No				
	(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	□NA		ļ			
	Visual inspection (certification) of the proposed site, Aerial photo, Satellite image	٠,,,,		l			
	Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	∏Yes	□No	ļ			
		□ I C3	٠ <u>°</u>	١			
	 (Applied to permanent pits) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image 	L_J,,,,		١			
	Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering	Yes	□No	l			
	purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.			l			
	NIM Office of the State Francisco - WATEDS database secrets Vigual impropriate (contribution) of the proposed site	1		l			
	- NM Office of the State Engineer - IWATERS database search; Visual inspection (certification) of the proposed site			١			
	Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	∐Yes	∐No	l			
	- Written confirmation or verification from the municipality, Written approval obtained from the municipality						
	Within 500 feet of a wetland.	Yes	No	l			
	- US Fish and Wildlife Wetland Identification map; Topographic map, Visual inspection (certification) of the proposed site						
	Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	∐No				
	Within an unstable area.	Yes	□No				
	- Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological		□				
	Society, Topographic map						
	Within a 100-year floodplain - FEMA map	Yes	No				
	- LLayuza undit			1			

Form C-144 Oil Conservation Division Page 2 of 5

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15 17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached					
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15 17 9 NMAC					
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15 17 9					
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC					
Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC					
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15 17 12 NMAC					
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15.17 9 NMAC and 19 15 17 13 NMAC					
Previously Approved Design (attach copy of design) API or Permit Number					
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15.17 9 NMAC Instructions. Each of the following items must be attached to the application Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15 17 9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19 15 17 10 NMAC					
Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC					
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15 17 12 NMAC					
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15 17 13 NMAC					
Previously Approved Design (attach copy of design) API					
Previously Approved Operating and Maintenance Plan API					
13					
Permanent Pits Permit Application Checklist: Subsection B of 19.15 17 9 NMAC					
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.					
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19 15 17 9 NMAC					
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC					
Climatological Factors Assessmen Certified Engineering Design Plans - based upon the appropriate requirements of 19 15 17 11 NMAC					
Dike Protection and Structural Integrity Design based upon the appropriate requirements of 19 15 17 11 NMAC					
Leak Detection Design - based upon the appropriate requirements of 19.15 17 11 NMAC					
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19 15 17 11 NMAC					
Quality Control/Quality Assurance Construction and Installation Plar					
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15 17 12 NMAC					
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19 15.17.11 NMAC					
Nuisance or Hazardous Odors, including H2S, Prevention Plan					
Emergency Response Plan					
Oil Field Waste Stream Characterization					
Monitoring and Inspection Plan Erosion Control Plan					
Closure Plan - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15 17.13 NMAC					
Proposed Closure: 19 15 17 13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.					
Type Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System					
Alternative					
Proposed Closure Method Waste Excavation and Removal					
Waste Removal (Closed-loop systems only) On-site Closure Method (only for temporary pits and closed-loop systems)					
In-place Burial On-site Trench Burial					
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)					
15					
Waste Excavation and Removal Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan.					
Please indicate, by a check mark in the box, that the documents are attached.					
Protocols and Procedures - based upon the appropriate requirements of 19 15 17 13 NMAC					
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17.13 NMAC					
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings					
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15.17 13 NMAC					
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15 17 13 NMAC					
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC					

Form C-144 Oil Conservation Division Page 3 of 5

16 Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel 7	Fants or Hauloff Rins Only (1915 1712 D NMAC)			
Instructions Please identify the facility or facilities for the disposal of liquids, drilling flu		ulities		
are required	Dominant Franks Brown to #			
	Disposal Facility Permit #			
Will any of the proposed closed-loop system operations and associated activities of	Disposal Facility Permit # ccur on or in areas that will not be used for future serv			
Yes (If yes, please provide the information No Required for impacted areas which will not be used for future service and operations.				
Soil Backfill and Cover Design Specification - based upon the appropriate	requirements of Subsection H of 19 15 17 13 NMAC			
Re-vegetation Plan - based upon the appropriate requirements of Subsection				
Site Reclamation Plan - based upon the appropriate requirements of Subsec	tion G of 19.15 17 13 NMAC			
17 <u>Siting Criteria (Regarding on-site closure methods only:</u> 19,15 17 10 NMAC Instructions Each siting criteria requires a demonstration of compliance in the closure plan Reconsting criteria may require administrative approval from the appropriate district office or may be co- consideration of approval Justifications and/or demonstrations of equivalency are required Pleas	nsidered an exception which must be submitted to the Santa Fe En			
Ground water is less than 50 feet below the bottom of the buried waste		Yes No		
- NM Office of the State Engineer - IWATERS database search, USGS Data obtain	ed from nearby wells	∐N/A		
Ground water is between 50 and 100 feet below the bottom of the buried waste	·	Yes No		
- NM Office of the State Engineer - (WATERS database search, USGS, Data obtaine	d from nearby wells	□N/A		
Ground water is more than 100 feet below the bottom of the buried waste.		Yes No		
- NM Office of the State Engineer - IWATERS database search, USGS, Data obtaine	d from nearby wells	□N/A		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significan (measured from the ordinary high-water mark)	it watercourse or lakebed, sinkhole, or playa lake	Yes No		
- Topographic map, Visual inspection (certification) of the proposed site				
Within 300 feet from a permanent residence, school, hospital, institution, or church in exi	stence at the time of initial application	Yes No		
- Visual inspection (certification) of the proposed site, Aerial photo, satellite image				
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence - NM Office of the State Engineer - iWATERS database, Visual inspection (certificat	ce at the time of the initial application.	YesNo		
Within incorporated municipal boundaries or within a defined municipal fresh water well pursuant to NMSA 1978, Section 3-27-3, as amended		Yes No		
- Written confirmation or verification from the municipality, Written approval obtain	ed from the municipality			
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspec	tion (certification) of the proposed site	Yes No		
Within the area overlying a subsurface mine	, , , , , , , , , , , , , , , , , , , ,	□Yes □No		
- Written confirantion or verification or map from the NM EMNRD-Mining and Mir	neral Division			
Within an unstable area		Yes No		
- Engineering measures incorporated into the design, NM Bureau of Geology & Mind Topographic map	eral Resources, USGS, NM Geological Society,			
Within a 100-year floodplain - FEMA map		Yes No		
On-Site Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of check mark in the box, that the documents are attached.	the following items must bee attached to the closure p	olan. Please indicate, by a		
Siting Criteria Compliance Demonstrations - based upon the appropriate re	•			
Proof of Surface Owner Notice - based upon the appropriate requirements				
Construction/Design Plan of Burial Trench (if applicable) based upon the a		16.611.307.50		
Construction/Design Plan of Temporary Pit (for in place burial of a drying		15 17 11 NMAC		
Protocols and Procedures - based upon the appropriate requirements of 19				
Confirmation Sampling Plan (if applicable) - based upon the appropriate re				
Waste Material Sampling Plan - based upon the appropriate requirements of		not be achieved)		
Disposal Facility Name and Permit Number (for liquids, drilling fluids and Soil Cover Design - based upon the appropriate requirements of Subsection		iot de demeveuj		
Re-vegetation Plan - based upon the appropriate requirements of Subsection				
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC				

Form C-144 Oil Conservation Division Page 4 of 5

Operator Application Contiferation
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief
Name (Print) Title
Signature Date
e-mail address Telephone.
OCD Approval: Permit Application (including closure plan) Cooking (see attachment) OCD Representative Signature: Approval Date: OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC Instructions Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed X Closure Completion Date: September 1, 2009
Closure Method: Waste Excavation and Removal On-site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized. Disposal Facility Name Disposal Facility Permit Number Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliane to the items below) Required for impacted areas which will not be used for future service and operations Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installatior Re-vegetation Application Rates and Seeding Technique
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached. X Proof of Closure Notice (surface owner and division) X Proof of Deed Notice (required for on-site closure) X Plot Plan (for on-site closures and temporary pits) X Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (if applicable) Disposal Facility Name and Permit Number X Soil Backfilling and Cover Installatior X Re-vegetation Application Rates and Seeding Technique X Site Reclamation (Photo Documentation) On-site Closure Location Latitude 36.637481 °N Longitude 107.428404 °W NAD 1927 X 1983
25
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is ture, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan
Name (Print) Crystal Tafoya Title. Regulatory Tech
Signature Japana Date 2/1/2010
Telephone Telephone

Burlington Resources Oil Gas Company, LP San Juan Basin Closure Report

Lease Name: SAN JUAN 28-6 UNIT 102P

API No.: 30-039-30532

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the temporary pit referenced above. All proper documentation regarding closure activities is being included with the C-144. The temporary pit for this location was constructed and location drilled before June 16, 2008 (effective date for Rule 19.15.17). While closure of the temporary pit did fall within the rule some dates for submittals are after the rig release date.

- Details on Capping and Covering, where applicable. (See report)
- Plot Plan (Pit Diagram) (Included as an attachment)
- Inspection Reports (Included as an attachment)
- Sampling Results (Included as an attachment)
- C-105 (Included as an attachment)
- Copy of Deed Notice will be filed with County Clerk (Not required on Federal, State, or Tribal land as stated by FAQ dated October 30, 2008)

General Plan:

1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011).

2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.

The pit was closed using onsite burial.

3. The surface owner shall be notified of BR's closing of the temporary pit as per the approved closure plan using certified mail, return receipt requested.

The closure process notification to the landowner was sent via email. (See Attached)(Well located on Federal Land, certified mail is not required for Federal Land per BLM/OCD MOU.)

4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.

Provision 4 of the closure plan requirements were not met due to rig move off date as noted on C-105 which was prior to pit rule change. Burlington will ensure compliance with this rule in the future.

- 5. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is attached.

6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at a licensed disposal facility.

Liner of temporary pit was removed above "mud level" after stabilization. Removal of the liner consisted of manually cutting liner at mud level and removing all remaining liner. Care was taken to remove "ALL" of the liner i.e., edges of liner entrenched or buried. All excessive liner was disposed of at a licensed disposal facility, (San Juan County Landfill).

7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.

Burlington mixed the Pit contents with non-waste containing, earthen material in order to achieve the solidification process. The solidification process was accomplished by using a combination of natural drying and mechanically mixing. Pit contents were mixed with non-waste, earthen material to a consistency that is deemed as safe and stable. The mixing ratio consisted of approximately 3 parts clean soil to 1 part pit contents.

8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	2.7 ug/kg
BTEX	EPA SW-846 8021B or 8260B	50	373 ug/KG
TPH	EPA SW-846 418.1	2500	1240 mg/kg
GRO/DRO	EPA SW-846 8015M	500	147 mg/Kg
Chlorides	EPA 300.1	1000/500	595 mg/L

9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.

The pit material passed solidification and testing standards. The pit area was then backfilled with compacted, non-waste containing, earthen material. More than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.

The integrity of the liner was not damaged in the pit closure process.

11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011

Dig and Haul was not required.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final recontour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The pit area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Reshaping included drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. Notification will be sent to OCD when the reclaimed area is seeded.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 14 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

Provision 15 was accomplished by installing a steel marker in the temporary pit, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial. The marker is flush with the ground to allow access of the active well pad and for safety concerns. The top of the marker contains a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate contains the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the following operator's information at the time of all wells on the pad are abandoned. The riser will be labeled: Burlington, BLM, San Juan 28-6 Unit 102P, UL-A, Sec. 26, Twn 28N, Rge 6W, API # 30-039-30532

Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Wednesday, October 15, 2008 4:32 PM

To: Subject:

'mark_kelly@nm.blm.gov' Surface Owner Notification

The following locations temporary pit will be closed on-site. Please let me know if you have any questions.

San Juan 28-6 Unit 114N San Juan 28-6 Unit 153N San Juan 28-6 Unit 205N San Juan 28-6 Unit 102P

Thank you,

Crystal L. Tafoya Regulatory Technician *ConocoPhillips Company* San Juan Business Unit Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102 Revised October 12, 2005 Submit to Appropriate District Office State Lease - 7 Copies Fee Lease - 3 Copies

☐ AMMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT

1 A	1 API Number 2 Pool Code 3 Pool Name MESAVERDE / DAKOTA								
⁴ Property Code ⁵ Property Name SAN JUAN 28-6					•			⁶ Well Number 102P	
7 OGRID No. 8 Operator Name BURLINGTON RESOURCES OIL & GAS COMPANY LP						⁹ Elevation 6676			
					10 SURFACE	LOCATION		· · · · · · · · · · · · · · · ·	
UL or lot no.	Section 26	Township 28-N	Range 6-W	Lot Idn	Feet from the 820	North/South line NORTH	Feet from the 290	East/West line EAST	County RIO ARRIBA
L	1	1		ottom H	L	If Different Fro		1	
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres	s 13 Joint	or Infill 14	Consolidation	Code 15	Order No				

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

N 89'47'12" E N 89'55'00" W	5276.7' (M) 5277.4' (R) 2 WELL FLAG NAD 83 LAT: 36.637283° N LONG: 107.428531° W NAD 27 LAT:36°38.236505' N LONG: 107°25.675644' W	I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a comtract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory paoling order heretofore entered by the division. Signature
	NE/4 DEDICATED ACREAGE USA SF-079050-A	Printed Name 7 Title and E-mail Address Date 18 SURVEYOR CERTIFICATION
	SE/4 DEDICATED ACREAGE USA SF-079050-B SECTION 26, T-28-N, R-6-W	I hereby certify that the well location shown on this plat was plotted from feld noises of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey: 12/19/07 Signature and Seal of Professional Surveyor: BRUADH
		Certificate Number: NM 11393

SAN JUAN 28-6 UNIT #102P

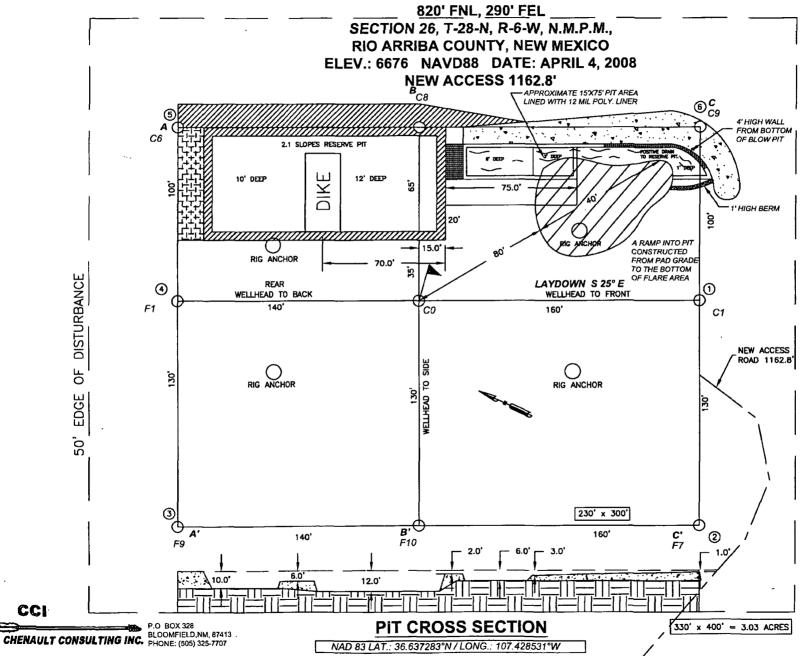

SHALLOW SIDE). ABOVE : (OVERFLOW-3' WIDE AND SIDE DEEP ABOVE RESERVE

NOTES:

PRIOR TO CONSTRUCTION. UNMARKED BURIED (2) WORKING DAYS OR PIPELINES.
Y MARKED OR 1
AT LEAST TWO NoT C.C.I. SUR CONTRACTO PIPLINES 7



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	COPC	Project #:	96052-0026
Sample ID:	Reserve Pit	Date Reported:	08-11-09
Laboratory Number:	51136	Date Sampled:	08-05-09
Chain of Custody No:	7582	Date Received:	08-05-09
Sample Matrix:	Soil	Date Extracted:	08-07-09
Preservative:	Cool	Date Analyzed:	08-10-09
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)	
Gasoline Range (C5 - C10)	8.3	0.2	
Diesel Range (C10 - C28)	139	0.1	
Total Petroleum Hydrocarbons	147	0.2	

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

SJ 28-6 Unit 102P

Analyst

Review

Ph (505) 632-0615 Fr (800) 362-1879 Fx (505) 632-1865 lab@envirotech-inc.com envirotech-inc.com



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

Client:	QA/QC	Project #:	N/A
Sample ID:	08-10-09 QA/QC	Date Reported:	08-11-09
Laboratory Number:	51103	Date Sampled:	N/A
Sample Matrix:	Methylene Chloride	Date Received ⁻	N/A
Preservative:	N/A	Date Analyzed:	08-10-09
Condition:	N/A	Analysis Requested:	TPH

and a particular to the second second	I-Cal Date	I-Cal RF:	C-Cal RF	% Difference	Accept Range
Gasoline Range C5 - C10	05-07-07	1.0028E+003	1.0032E+003	0.04%	0 - 15%
Diesel Range C10 - C28	05-07-07	9.1642E+002	9.1679E+002	0.04%	0 - 15%

Blank Conc. (mg/L - mg/Kg)	Concentration.	Detection Limit
Gasoline Range C5 - C10	ND	0.2
Diesel Range C10 - C28	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

Duplicate Conc. (mg/Kg)	Sample	Duplicate -	% Difference	Accept Range
Gasoline Range C5 - C10	ND	ND	0.0%	0 - 30%
Diesel Range C10 - C28	5.8	6.7	15.5%	0 - 30%

Spike Conc. (mg/Kg)	Sample S	pike Added S	pike Result	% Recovery	Accept Range
Gasoline Range C5 - C10	ND	250	252	101%	75 - 125%
Diesel Range C10 - C28	5.8	250	274	107%	75 - 125%

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

QA/QC for Samples 51103 - 51105, 51109 - 51110, and 51133 - 51137.



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	COPC	Project #:	96052-0026
Sample ID:	Reserve Pit	Date Reported:	08-11-09
Laboratory Number:	51136	Date Sampled:	08-05-09
Chain of Custody:	7582	Date Received:	08-05-09
Sample Matrix:	Soil	Date Analyzed:	08-10-09
Preservative:	Cool	Date Extracted:	08-07-09
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)	
Benzene	2.7	0.9	
Toluene	55.4	1.0	
Ethylbenzene	20.7	1.0	
p,m-Xylene	214	1.2	
o-Xylene	80.0	0.9	
Total BTEX	373		

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	96.0 %
	1,4-difluorobenzene	96.0 %
	Bromochlorobenzene	96.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

SJ 28-6 Unit 102P

Analyst

Mustue mucetus Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client	N/A	Project #	N/A
Sample ID.	08-10-BT QA/QC	Date Reported	08-11-09
Laboratory Number	51103	Date Sampled:	N/A
Sample Matrix:	Soil	Date Received:	N/A
Preservative.	N/A	Date Analyzed:	08-10-09
Condition.	N/A	Analysis	BTEX

Calibration and Detection Limits (ug/L)	I-Cal RF:	C-Cal RF: Accept. Rang	%Diff. ge 0 - 15%	Blank Conc	Detect:
Benzene	4 8763E+006	4 8861E+006	0.2%	ND	0.1
Toluene	4 5237E+006	4 5327E+006	0.2%	ND	0.1
Ethylbenzene	4 0106E+006	4 0186E+006	0.2%	ND	0.1
p,m-Xylene	1 0405E+007	1 0426E+007	0.2%	ND	0.1
o-Xylene	3 8191E+006	3 8268E+006	0.2%	ND	0.1

Duplicate Conc. (ug/Kg)	Sample Di	uplicate	%Diff.	Accept Range	Detect Limit
Benzene	9.0	9.2	2.2%	0 - 30%	0.9
Toluene	13.4	13.9	3.7%	0 - 30%	1.0
Ethylbenzene	16.9	17.6	4.1%	0 - 30%	1.0
p,m-Xylene	38.9	39.7	2.1%	0 - 30%	1.2
o-Xylene	21.9	22.0	0.5%	0 - 30%	0.9

Spike Conc. (ug/Kg)	Sample Amo	unt Spiked = Spik	ed Sample	% Recovery	Accept Range
Benzene	9.0	50.0	57.9	98.1%	39 - 150
Toluene	13.4	50.0	61.2	96.5%	46 - 148
Ethylbenzene	16.9	50.0	63.7	95.2%	32 - 160
p,m-Xylene	38.9	100	144	104%	46 - 148
o-Xylene	21.9	50.0	67.4	93.7%	46 - 148

ND - Parameter not detected at the stated detection limit

References

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996

Comments:

QA/QC for Samples 51103 - 51105, 51109 - 51110, and 51133 - 51137.

Analyst

EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Reserve Pit	Date Reported:	08-11-09
Laboratory Number:	51136	Date Sampled:	08-05-09
Chain of Custody No:	7582	Date Received:	08-05-09
Sample Matrix:	Soil	Date Extracted:	08-10-09
Preservative:	Cool	Date Analyzed:	08-10-09
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

1,240

16.5

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

SJ 28-6 Unit 102P.

Muste my wester



EPA METHOD 418.1 TOTAL PETROLEUM **HYROCARBONS QUALITY ASSURANCE REPORT**

Client:

QA/QC

Project #:

N/A

Sample ID:

QA/QC

Date Reported:

08-11-09

Laboratory Number:

08-10-TPH.QA/QC 51135

Date Sampled:

N/A

Sample Matrix:

Freon-113

Date Analyzed: Date Extracted: 08-10-09

Preservative: Condition:

N/A N/A

Analysis Needed:

08-10-09 **TPH**

Calibration Sel-Cal Date

C-Cal Date Accept. Range

08-03-09

08-10-09

1,380

1,270

8.0%

+/- 10%

Blank Conc. (mg/Kg)

TPH

Concentration ND

Detection Limit

Duplicate Conc. (mg/Kg)

Sample

386

Duplicate

% Difference

16.5

Accept. Range:

TPH

386

0.0%

+/- 30%

Spike Conc. (mg/Kg) Sample Spike Added Spike Result

% Recovery Accept Range

TPH

386

2,000

2,320

97.2%

80 - 120%

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

QA/QC for Samples 51135 - 51136, 51153 - 51159.

Analysť

Mit m Water



Chloride

COPC 96052-0026 Client: Project #: Sample ID: Reserve Pit Date Reported: 08-11-09 Lab ID#: 51136 Date Sampled: 08-05-09 Sample Matrix: Soil Date Received: 08-05-09 Preservative: Cool Date Analyzed: 08-07-09 Chain of Custody: Condition: Intact 7582

Parameter

Concentration (mg/Kg)

Total Chloride

595

Reference:

U.S.E.P.A., **45**00B, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments:

SJ 28-6 Unit 102P.

Analyst

Review Walter

Submit To Appropr Two Copies District I	bmit To Appropriate District Office vo Copies State of New Mexic					ocouroos							orm C-105 July 17, 2008			
1625 N French Dr District II	, Hobbs, NM	88240	Energy, Minerals and Natural Resources					ŀ	1. WELL API NO.							
1301 W Grand Ave District III			Off Coffset various Division						30-039-30532 2 Type of Lease							
1000 Rio Brazos Rd , Aztec, NM 87410 District IV Screen For NIM 87505							☐ STATE ☐ FEE ☒ FED/INDIAN 3. State Oil & Gas Lease No.									
1220 S. St. Francis Dr., Santa Fe, NM 87505 Santa Fe, NM 87505								SF-079050-A								
WELL COMPLETION OR RECOMPLETION REPORT AND LOG																
4 Reason for filing:								5 Lease Name or Unit Agreement Name San Juan 28-6 Unit								
_							6 Well Number 102P									
C-144 CLOS #33, attach this a	SURE ATTA nd the plat to	ACHMENT the C-144 cl	(Fill in bo osure repo	oxes #1 thrort in accor	ough #9, #15 D rdance with 19	ate Rig 15 17 13	Released 3 K NMA	and #32 and .C)	or							
 Type of Comp NEW NEW NEW NEW NEW NEW NEW NEW NEW NEW	oletion: WELL	WORKOVER	. □ DEE	PENING	□PLUGBAC	к П г	DIFFERE	NT RESERV	OIR	R □ OTHER						
8. Name of Opera Burlington Resou	ator									9 OGRID 14538						
10 Address of O		is Company,	<u></u>							11 Pool name or Wildcat						
12.Location Surface:	Unit Ltr	Section	Tow	vnship	Range	Lot		Feet from t	he	N/S Line	Fe	et from the	E/W	Line	County	
BH:						 			_				1			
13 Date Spudded	d 14 Date	TD Reache		Date Rig	Released		16	Date Compl	leted	(Ready to Prod	luce)				and RKB,	
18. Total Measur	ed Depth of	Well		1/18/2009 Plug Bac	ck Measured De	nth	20	Was Direct	iona	Il Survey Made?)		T, GR, o	,	ther Logs Run	
	-					P										
22 Producing Int	terval(s), of t	this completion	on - Top, E	Bottom, Na	ame											
23.				CAS	ING REC	ORI			rin	gs set in w						
CASING SI	ZE	WEIGHT I	_B /FT	_	DEPTH SET		Н	DLE SIZE		CEMENTIN	G R	ECORD	A	MOUNT	PULLED	
						-										
									-							
24. SIZE									25	TUBING RECORD SIZE DEPTH SET PACKER SET					CD CCT	
SIZE	TOP		BOTTOM	<u> </u>	SACKS CEIV	IENI	SCREE	N	312	ZE	+	JEPIH SE	1	PACK	EK SEI	
26 Parforation	na and (into	muol ai	11>					, allow	ED	ACTURE OF		NE COL	PEZE	ETC		
26 Perforation	i recora (inte	rval, size, and	i number)					ID, SHOT, INTERVAL		RACTURE, CEMENT, SQUEEZE, ETC. AMOUNT AND KIND MATERIAL USED						
					_											
28								TION								
Date First Produc	ction	Pro	duction M	1ethod (Fle	owing, gas lift, p	oumping	g - Size ar	nd type pump)	Well Status	s (Pr	od. or Shut	- <i>in)</i>			
Date of Test	Hours T	ested	Choke Si	ize	Prod'n For Test Period		Oil - Bb	I	Ga	s - MCF	1	Water - Bbl		Gas - 0	Oil Ratio	
Flow Tubing Press	Casing I	Pressure	Calculate Hour Rat		Oil - Bbl		Gas	Gas - MCF		Water - Bbl		Oil Gra	Oil Gravity - API - (Corr)		7)	
29 Disposition of Gas (Sold, used for fuel, vented, etc.) 30 Test Witnessed By							ÿ									
31. List Attachm																
 	32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit															
33. If an on-site	33. If an on-site burial was used at the well, report the exact location of the on-site burial															
I hereby certi	Latitude 36 637481°N Longitude 107.428404°W NAD 12927 21983 I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief															
Signature Total Lafora Printed Name Crystal Tafoya Title: Regulatory Tech Date: 2/1/20/0																
E-mail Address crystal.tafoya@conocophillips.com																

ConocoPhillips O

Pit Closure Form:	
Date: 9/1/09	
Well Name: 28-6# 1028	
Footages:	Unit Letter: <u>A</u>
Section: 26 , T-28 -N, R-6 -W, County:	2:0 Arr. v. State: 12 M.
Contractor Closing Pit: Aztcc	-
Construction Inspector: Snith	Date: 9///09
Inspector Signature:	

(

Tafoya, Crystal

From:

Silverman, Jason M

Sent:

Tuesday, August 25, 2009 10:43 AM

To:

Brandon.Powell@state.nm.us; Mark Kelly; Robert Switzer, Sherrie Landon

Cc:

'Aztec Excavation'; 'Randy Flaherty'; 'BOS'; 'tevans48@msn.com'; Faver Norman (faverconsulting@yahoo.com); Jared Chavez; Bassing, Kendal R.; Scott Smith; Silverman, Jason M; Smith Eric (sconsulting.eric@gmail.com); Terry Lowe; Becker, Joey W, Bonilla, Amanda; Bowker, Terry D; Busse, Dollie L; Chavez, Virgil E; Gordon Chenault; GRP:SJBU Production Leads; Hockett, Christy R; Johnson, Kirk L; Kennedy, Jim R, Lopez, Richard A; Nelson, Terry J, O'Nan, Mike J.; Peace, James T; Pierce, Richard M; Poulson, Mark E; Richards, Brian; Smith, Randall O; Stamets, Steve A; Thacker, LARRY; Work, Jim A; Blair, Maxwell O; Blakley, Mac; Clark, Joni E; Farrell, Juanita R; Gillette, Steven L (Gray Surface Specialties and Consulting, Ltd.): Green David A: Hines, Derek J (Finney Land Co.): Maxwell

Specialties and Consulting, Ltd.); Greer, David A; Hines, Derek J (Finney Land Co.); Maxwell,

Mary Alice; McWilliams, Peggy L; Seabolt, Elmo F; Stallsmith, Mark R

Subject:

Reclamation Notice: San Juan 28-6 Unit 102P

Importance: High

Attachments: San Juan 28-6 unit 102P.pdf

Aztec Excavation will move a tractor to the San Juan 28-6 Unit 102P on Thursday PM, August 27th, 2009, to start the Reclamation Process.

Please contact Eric Smith (608-1387) if you have any questions or need further assistance.

Thanks, Jason Silverman

Burlington Resources Well- Network #: 10218750

Rio Arriba County, NM

SAN JUAN 28-6 UNIT 102P – BLM surface / BLM minerals

Twin: n/a

820' FNL, 290' FEL SEC. 26, T28N, R06W

Unit Letter 'A'

Lease #: USA SF-079050-A

API #: 30-039-30532

Latitude: 36° 38 min 14.21880 sec N (NAD 83) Longitude: 107° 25 min 42.71160 sec W (NAD83)

Elevation: 6676'

Jason.M.Silverman@ConocoPhillips.com


ConocoPhillips O


_	
)2P	
290 fel	Unit Letter: A
N, R- <u>6</u> -W, Coun	ty: Rio Arciba State: W.M.
Aztuc	
90/3/09	
10/19/09	
10/19/09	
. ,	
Eric Snith	Date: 10/20/09
£ 98-	
	290 fel N, R-6-W, Coun Az+== 90/3/09 10/19/09

BURLINGTON OPHILIPS BESIDES

SAN JUAN 28-6 UNIT #102P
LATITUDE 36° 38 MIN. 14.21880 SEC. N (NAD 83)
LONGITUDE 107° 25 MIN. 42.71160 SEC. W (NAD 83)
UNIT A SEC 26 T28N RO6W
820' FNL 290' FEL
API # 30-039-30532
LEASE# USA SF-079050-A ELEV 6676'
RIO ARRIBA COUNTY, NEW MEXICO



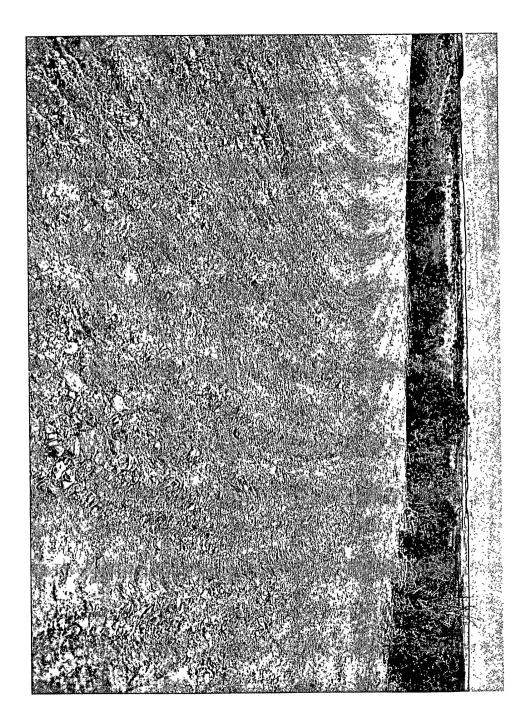

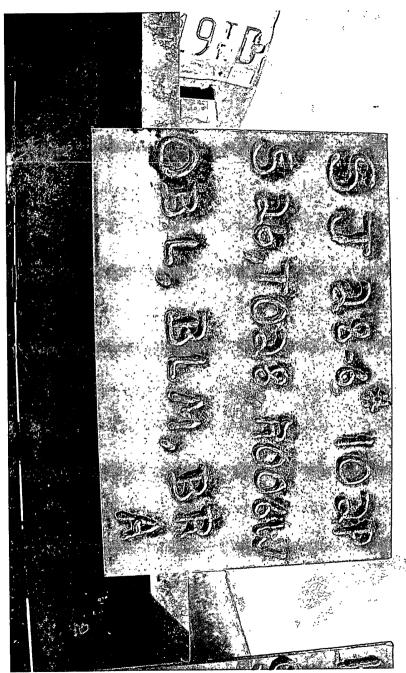

養物

WELL PAD SAFETY AND ENVIRONMENTAL CHECK LIST

INSPECTOR art Sanchez	SAFETY CHECK	LOCATION	PICTURES	
	CHECK			
rt Sanchez		CHECK	TAKEN	COMMENTS
	X	Х	X	
rt Sanchez	X	Х	X	Called Crossfire to repair fence
rt Sanchez	Х	X	X	
rt Sanchez	X	. X	X	
rt Sanchez	X	X	X	
rt Sanchez	X	Х	X	
rt Sanchez	х	X	Х	
. Perry	X	Х	X	
. Perry	х	Х	х	
. Perry	Х	Х	х	
. Perry	х	Х	Х	Sign on location
. Smith				Pit Closed
			-	
		*		
				
			<u></u>	
.r .r .r .	rt Sanchez rt Sanchez rt Sanchez rt Sanchez rt Sanchez rt Sanchez Perry Perry Perry Perry Perry	rt Sanchez X Perry X Perry X Perry X Perry X Perry X	rt Sanchez rt Sanchez x x x x x x rt Sanchez x x x x x x x x x x x x x x x x x x x	rt Sanchez X X X X X X X X X X X X X X X X X X X