



30-045-21300


Downhole Well Profile - with Schematic

Well Name: Canyon 06

OIL CONS. DIV DIST. 3

JUN 16 2015

API#	XTO Accounting ID	Permit Number	State/Province	County
300452 1 3000000	70140		New Mexico	San Juan
Location	Spud Date	Original KB Elevation (ft)	Ground/Corrected Ground Elevation (ft)	KB-Ground Distance (ft)
T25N-R 11W-S11	9/29/1973 00:00	6,353.00	6,340.00	13.00

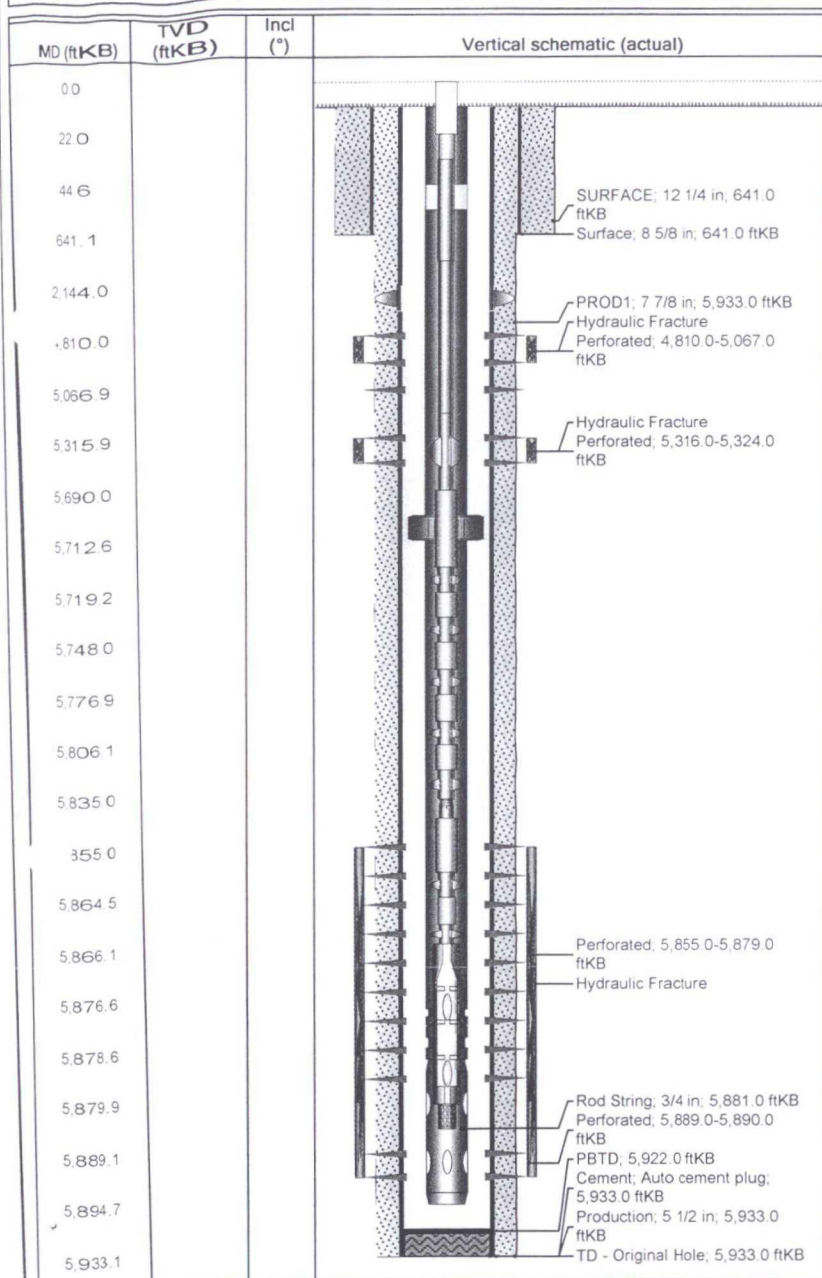


Wellbores							
Wellbore Name			Parent Wellbore			Wellbore API/UWI	
Original Hole			Original Hole				
Start Depth (ftKB)			Profile Type			Kick Off Depth (ftKB)	
13.0							
Section Des		Size (in)		Act Top (ftKB)		Act Btm (ftKB)	
SURFACE		12 1/4		13.0		641.0	
PROD1		7 7/8		641.0		5,933.0	
Zones							
Zone Name		Top (ftKB)		Btm (ftKB)		Current Status	
Mancos		4,810.0		5,324.0			
Dakota		5,855.0		5,890.0			
Casing Strings							
Csg Des		Set Depth (ftKB)		OD (in)		Wt/Len (lb/ft)	
Surface		641.0		8 5/8		24.00	
Production		5,933.0		5 1/2		15.50	
Cement							
Des		Type			String		
Surface Casing Cement		Casing			Surface, 641.0ftKB		
Production Casing Cement		Casing			Production, 5,933.0ftKB		
Tubing Strings							
Tubing Description			Run Date			Set Depth (ftKB)	
Tubing - Production			3/11/2011			5,894.7	
Item Des		OD (in)	Wt (lb/ft)	Grade	Jts	Len (ft)	Top (ftKB)
Tubing		2 3/8	4.70	J-55	1	31.59	13.0
Tubing Sub		2 3/8	4.70	J-55	1	8.10	44.6
Tubing		2 3/8	4.70	J-55	180	5,656.31	52.7
5-1/2" x 2-3/8" Tbg Anchor Catcher		4 1/4			1	3.50	5,709.0
Tubing		2 3/8	4.70	J-55	5	164.00	5,712.5
Seat Nipple		2 3/8			1	1.10	5,876.5
Blank Nipple		2 3/8			1	1.10	5,877.6
OEMA		2 3/8	4.70	J-55	1	16.00	5,878.7
Rod Strings							
Rod Description			Run Date			Set Depth (ftKB)	
Rod String			3/11/2011			5,881.0	
Item Des		OD (in)	Wt (lb/ft)	Grade	Jts	Len (ft)	Top (ftKB)
Polished Rod		1 1/4			1	22.00	0.0
Rod Sub		7/8		D	3	18.00	22.0
Sucker Rod		7/8		D	47	1,175.00	40.0
Sucker Rod		3/4		D	155	3,875.00	1,215.0
Sucker Rod w/Molded Guides		3/4		D	24	600.00	5,090.0
Sinker Bar		1 1/4		C	1	25.00	5,690.0
Stabilizer Rod		7/8		D	1	4.00	5,715.0



Downhole Well Profile - with Schematic

Well Name: Canyon 06

API/UWI 30045213000000	XTO Accounting ID 70140	Permit Number	State/Province New Mexico	County San Juan
Location T25N-R11W-S11	Spud Date 9/29/1973 00:00	Original KB Elevation (ft) 6,353.00	Ground/Corrected Ground Elevation (ft) 6,340.00	KB-Ground Distance (ft) 13.00

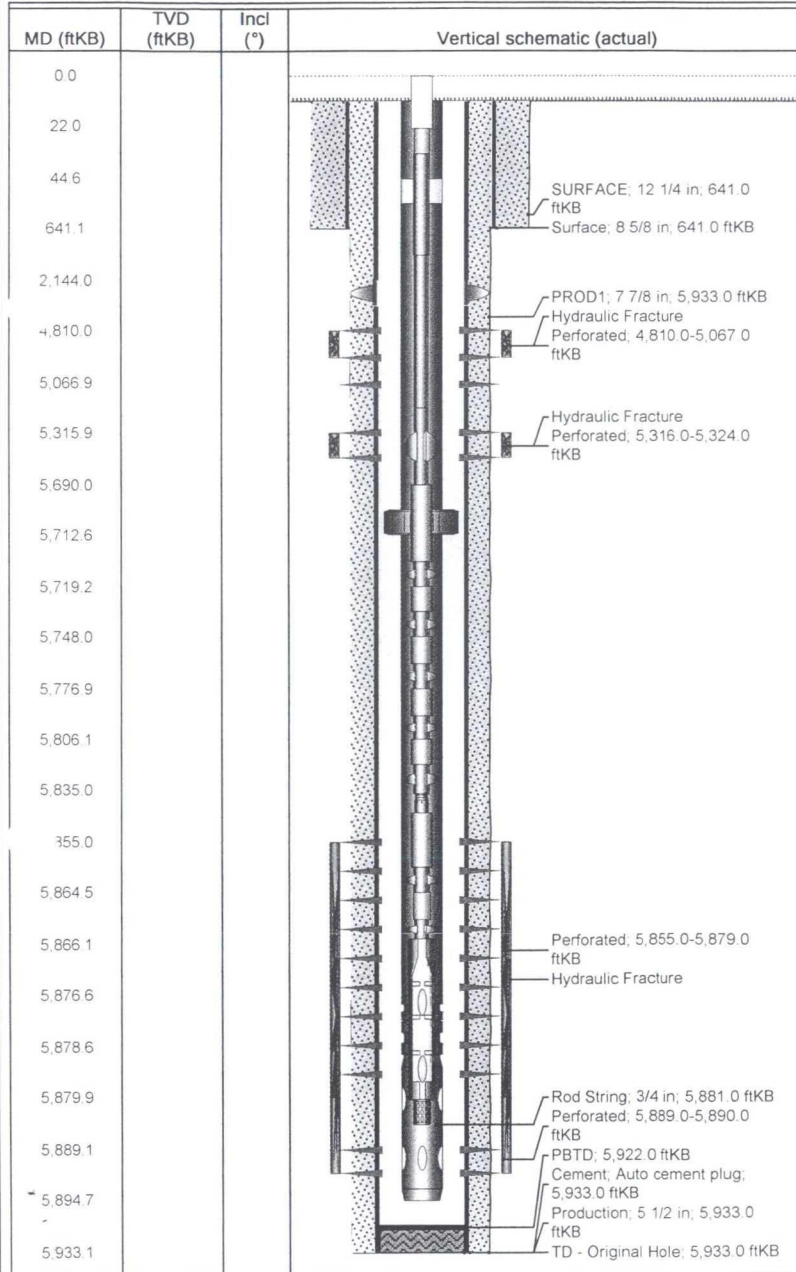

Item Des	OD (in)	Wt (lb/ft)	Grade	Jts	Len (ft)	Top (ftKB)	Btm (ftKB)
Sinker Bar	1 1/4		C	1	25.00	5,719.0	5,744.0
Stabilizer Rod	7/8		D	1	4.00	5,744.0	5,748.0
Sinker Bar	1 1/4		C	1	25.00	5,748.0	5,773.0
Stabilizer Rod	7/8		D	1	4.00	5,773.0	5,777.0
Sinker Bar	1 1/4		C	1	25.00	5,777.0	5,802.0
Stabilizer Rod	7/8		D	1	4.00	5,802.0	5,806.0
Sinker Bar	1 1/4		C	1	25.00	5,806.0	5,831.0
Stabilizer Rod	7/8		D	1	4.00	5,831.0	5,835.0
Shear Tool - 21K	3/4			1	0.50	5,835.0	5,835.5
Sinker Bar	1 1/4		C	1	25.00	5,835.5	5,860.5
Stabilizer Rod	7/8		D	1	4.00	5,860.5	5,864.5
Lift Sub	1			1	1.00	5,864.5	5,865.5
Spiral Rod Guide	3/4			1	0.50	5,865.5	5,866.0
Rod Insert Pump	1 1/2			1	14.00	5,866.0	5,880.0
Strainer Nipple	1			1	1.00	5,880.0	5,881.0

Other In Hole

Run Date	Des	OD (in)	Top (ftKB)	Btm (ftKB)

Perforations

Date	Top (ftKB)	Btm (ftKB)	Zone
3/2/2011	4,810.0	5,067.0	Mancos, Original Hole
2/28/2011	5,316.0	5,324.0	Mancos, Original Hole
10/15/1973	5,855.0	5,879.0	Dakota, Original Hole
10/15/1973	5,889.0	5,890.0	Dakota, Original Hole

Stimulations & Treatments

Frac #	Top Perf (ftKB)	Bottom Perf (ftKB)	AIR (bbl/min)	MIR (bbl/min)	TWP (bbl)	Total Proppant (lb)
	5855	5890				
1.00	5316	5324	19.4		420.0	43,100.0
2.00	4810	5065	19.4		665.0	85,760.0