

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use "APPLICATION FOR PERMIT--" for such proposals)

5. Lease

NMNM-03551

6. If Indian, Allottee or Tribe Name

7. Unit Agreement Name

1. Oil Well ☐ Gas Well ☐ Other ☐
GAS WELL

8. Well Name and No.

BREECH "E" 65

2. Name of Operator:

Caulkins Oil Company

9. API Well No.

30-039-29414-00S1

3. Address of Operator:

(505) 334-4323

10. Field and Pool, Exploratory Area

1409 W. Aztec Blvd. Ste B7, Aztec, NM 87410

BASIN DAKOTA

4. Location of Well (Footage, Sec., Twp., Rge.)

11. Country or Parish, State

1845' F/N 2075' F/E

SEC. 5-26N-6W

Rio Arriba Co., New Mexico

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☐ Notice of Intent

☐ Abandonment

☐ Change of Plans

☒ Subsequent Report

☐ Recompletion

☐ New Construction

☐ Final Abandonment Notice

☐ Plugging Back

☐ Non-Routine Fracturing

☐ Casing Repair

☒ Water Shut-Off

☐ Altering Casing

☐ Conversion to Injection

☐ Other

Completion

☐ Dispose Water

17. Describe Proposed or Completed Operations:

10-5-05

Rigged up.

T. I. H. with 4 3/4" bit on 2 3/8" tubing.

Drilled out stage tool at 3483'.

Tagged cement at 5468'.

10-6-05

Drilled cement and stage tool at 5508'.

Cleaned out to 7508'

Rolled hole with KCL water.

Pressure tested casing to 4000#. Held OK.

10-7-05

T. O. H. laying down 2 3/8" tubing with 4 3/4" bit.

10-10-05

Ran GSL log, 7500' to 3800'.

Perforated Dakota zone with 30 select fire holes, 7432' to 7346'.

10-11-05

Frac'd Dakota zone with 162,259# 20/40 sand and 17,292 mscf N₂ foam.

(continued on page 2)

NOTE: The format is issued in lieu of U.S. BLM Form 3160-5

18. I HEREBY CERTIFY THE FOREGOING IS TRUE AND CORRECT

SIGNED:

Robert L. Verquer
ROBERT L. VERQUER

TITLE:

Superintendent

DATE:


December 27, 2005

APPROVED BY:

TITLE:

DATE:

CONDITIONS OF APPROVAL, IF ANY

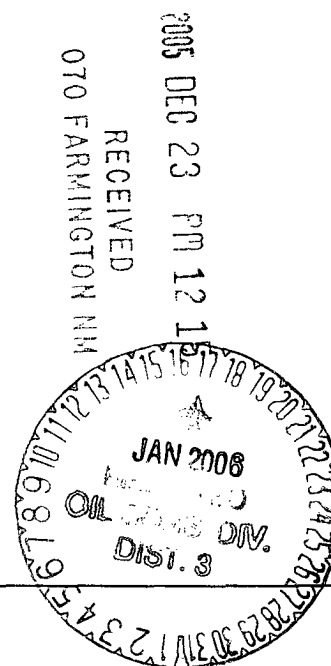

NMOCD

Caulkins Oil Company
BLM Sundry Notice
Breach "E" 65
November 30, 2005
Page 2

10-12-05	Flowed back N ₂ foam.
10-17-05	T. I. H. with 2 3/8" tubing with saw tooth collar. Tagged sand at 7230'. Cleaned out to 7508'.
10-18-05	Landed tubing on doughnut at 7409'.