

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN
NORTHWEST NEW MEXICO

OPERATOR: Williams Production Company LOCATION: K 8 31 5 LEASE NUMBER: SF-078763

NAME OF WELL/WELLS OR PIPELINE SERVICED: ROSA UNIT #080 MV/DK
DUALWELL N/A

30-039-22537

ELEVATION: 6261' GR COMPLETION DATE: 10/06/88 TOTAL DEPTH: 500 ft. LAND TYPE: FED

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG--Top:N/A' Bottom: N/A' Used 0 sx. Class "B" (1.18 cu.ft./sk).

WATER DEPTH: 60 ' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A '

COKE: 5940 lbs. of Metalurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10-D TOP ANODE @ 330 ft. BOTTOM ANODE @ 430 ft.

VENT PIPE: 1" PVC Set @ 500 ft. Vent pipe perforated from 310 ft. to 500 ft.

REMARKS: _____

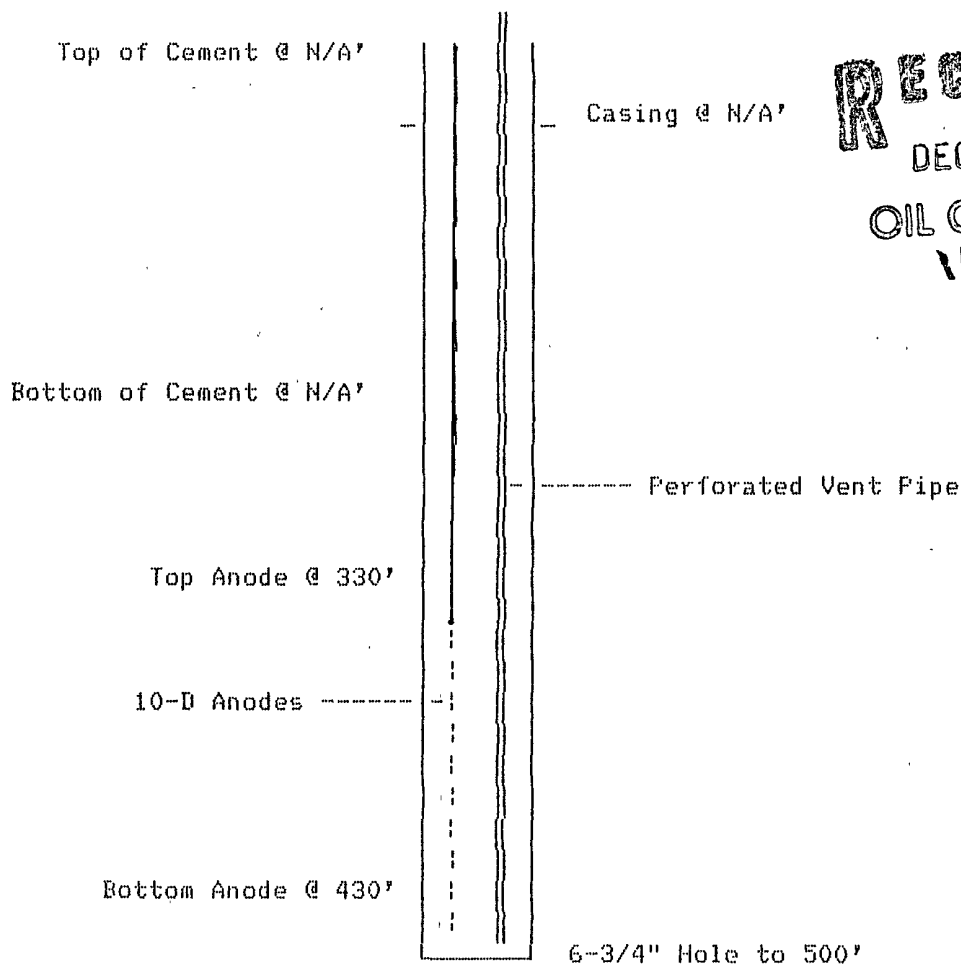

RECEIVED
DEC 11, 1991
OIL CON. DIV.
DIST. 3

DRILLING LOG

Rosa # 80

(NOTE WHERE WATER IS LOCATED)

SOIL

10 Sand/rock
 20 LI
 30 LI
 40 LI
 50 LI
 60 LI water
 70 LI
 80 LI
 90 LI
 100 Sandy/shale
 110 LI
 120 LI
 130 LI
 140 Sand/rock
 150 LI
 160 LI
 170 LI
 180 LI
 190 LI
 200 LI
 210 LI
 220 LI
 230 LI
 240 LI
 250 LI
 260 Sandy/shale
 270 LI
 280 LI
 290 shale
 300 LI
 310 LI
 320 LI
 330 LI
 340 LI
 350 LI
 360 LI
 370 LI
 380 LI
 390 LI
 400 LI
 410 LI
 420 LI
 430 Sand/rock
 440 LI
 450 LI
 460 LI
 470 LI
 480 LI
 490 LI
 500 LI
 510 LI
 520 LI

DATE

10/6/88

10	130	250	370	490
15	135	255	375	495
20	140	260	380	500
25	145	265	385	505
30	150	270	390	510
35	155	275	395	
40	160	280	400	
45	165	285	405	
50	170	290	410	
55	175	295	415	
60	180	300	420	
65	185	305	425	
70	190	310	430	
75	195	315	435	
80	200	320	440	
85	205	325	445	
90	210	330	450	
95	215	335	455	
100	220	340	460	
105	225	345	465	
110	230	350	470	
115	235	355	475	
120	240	360	480	
125	245	365	485	

Total Amps 11.6
 Total Volts 10.9
 Total Res. .93

- 1) 1.5
- 2) 1.5
- 3) 2.8
- 4) 3.1
- 5) 2.8
- 6) 2.4
- 7) 2.3
- 8) 2.5
- 9) 2.5
- 10) 2.6