

1479

F

30-045-26112

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS.
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit C Sec. 9 Twp 30 Rng 13

Name of Well/Wells or Pipeline Serviced MC CORD #11E

cps 6177w

Elevation N/A Completion Date 12/28/86 Total Depth 320' Land Type* N/A

Casing, Sizes, Types & Depths 80'

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 80' & 100'

Depths gas encountered: N/A

Type & amount of coke breeze used: 1800 lbs.

Depths anodes placed: 290', 280', 265', 255', 245', 235', 220', 210', 200', 190'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

RECEIVED

MAY 31 1991

OIL CON. DIV.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

BURGE CORROSION SYSTEMS, INC.

P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410

Drilling Log (Attach Hereto). ☐

Completion Date 12-28-86


Well Name <u>McCord # 11-E</u>				Location <u>Union Texas Petroleum</u>						
Type & Size Bit Used								Work Order No. <u>133</u>		
Anode Hole Depth <u>320</u>		Total Drilling Rig Time		Total Lbs. Coke Used <u>1800</u>		Lost Circulation Mat'l Used		No. Sacks Mud Used		
Anode Depth	#1 <u>290</u>	#2 <u>280</u>	#3 <u>265</u>	#4 <u>255</u>	#5 <u>245</u>	#6 <u>235</u>	#7 <u>220</u>	#8 <u>210</u>	#9 <u>200</u>	#10 <u>190</u>
Anode Output (Amps)	#1 <u>5.37</u>	#2 <u>5.89</u>	#3 <u>5.24</u>	#4 <u>5.86</u>	#5 <u>5.21</u>	#6 <u>4.40</u>	#7 <u>5.32</u>	#8 <u>5.36</u>	#9 <u>4.81</u>	#10 <u>3.87</u>
Anode Depth	#11	#12	#13	#14	#15	#16	#17	#18	#19	#20
Anode Output (Amps)	#11	#12	#13	#14	#15	#16	#17	#18	#19	#20
Total Circuit Resistance				No. 8 C.P. Cable Used				No. 2 C.P. Cable Used		
Volts <u>11.9</u>		Amps <u>24.3</u>		Ohms <u>0.49</u>		<u>2590</u>				

Remarks: Negative 160 feet

All Construction Completed

John Smith
(Signature)

GROUND BED LAYOUT SKETCH

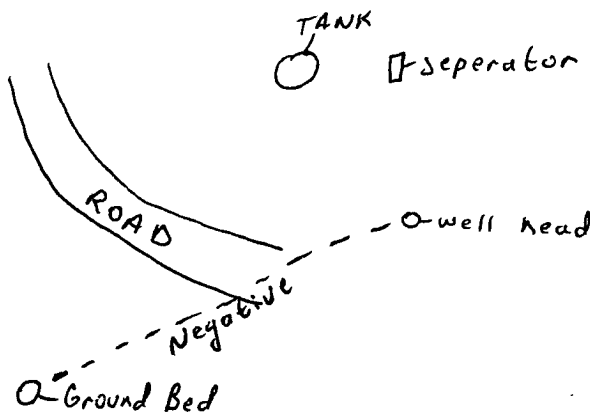

N

Aztec, New Mexico

DAILY DRILLING REPORT

December 28 1986

RANGE:

ML Cord

11-E

9

30

13

WATER AT

FEET

HOLE MADE:

80' 4 100

320-

DESCRIPTION OF FORMATION

[illegible]

REMARKS:

REMARKS: Water Volume was approx. 5 gallons per minute.

Dritter

Cody Munkreus

Tool Dresser