

RCVD APR 1 '08

OIL CONS. DIV.

COX CANYON #5C
BLANCO MESAVERDE

DIST. 3

Location:

1,505' FNL & 2,045' FWL
SE/4 NW/4 Section 21, T32N, R11W
San Juan, NM

Elevation: 6,900' GR

API #: 30-045-33493

Spud date: 01/20/08

Completed: 3/28/08

1ST Delivery: 00/00/00


Top	Depth
Fruitland Coal	3329'
Pictured Cliffs	3598'
Lewis	3805'
Huerfanito Bentonite	4272'
CliffHouse	5420'
Menefee	5517'
Point Lookout	5876'

STIMULATION

UpprCH/MEN: 5124' - 5384' (45
027" holes) Fraced with 9473# 14/30
LiteProp 125 followed with 3253#
brown sand.

CliffHouse/Menefee 5423' - 5792'
(53, 0 27" holes) Fraced with 9473#
14/30 LiteProp 125 followed with
3253# brown sand.

Point Lookout: 5838' - 6202' (52,
0.36" holes) Fraced with 9473# 14/30
LiteProp 125 followed with 3253#
brown sand.

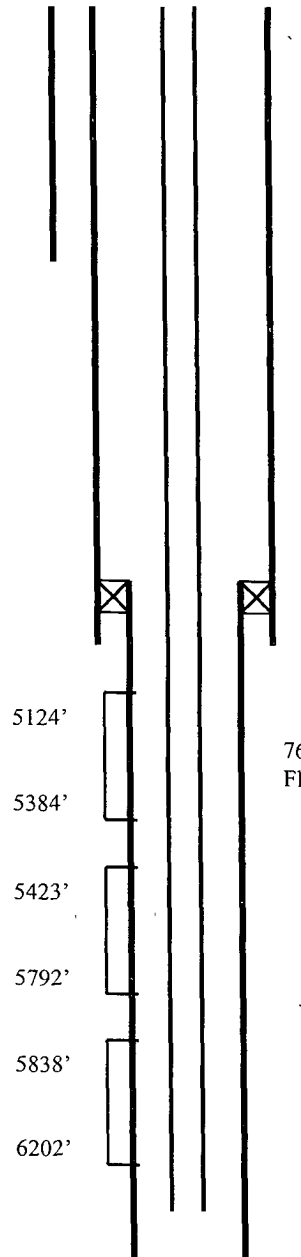

7 jts 9-5/8", 36#, K-55, LT&C csg Landed @ 335'.

66 jts 7", 23#, K-55, LT&C csg. Landed @ 3,062'.

TOL @ 2916'

76 jts 4-1/2", 11.6#, J-55 LT&C csg. Landed @ 6369'.
Float collar @ 6321'. Marker jt @ 5166'.

192 jts 2-3/8", 4.7#, J-55, EUE, 8rd tbg
landed @ 6215' as follows: exp mill on
bottom, 1 jt tbg, 1 7/8" SN @ 6184', 191
jts tbg.

TD @ 6370'

Hole Size	Casing	Cement	Volume	Top of CMT
12-1/4"	9-5/8", 36#	340 sxs	476 cu.ft.	surface
8-3/4"	7", 23#	650 sxs	1330 cu.ft.	surface
6-1/4"	4-1/2", 11.6#	220 sxs	473 cu.ft.	4650'

B