

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN
NORTHWEST NEW MEXICO

OPERATOR: Williams Production Company LOCATION: P 21 32 11 LEASE NUMBER: NM-03189
NAME OF WELL/WELLS OR PIPELINE SERVICED: COX CANYON UNIT #004A MV 30-045-22093
DUALWELL COX CANYON #11 30-045-21163

ELEVATION: 6557' GR COMPLETION DATE: 02/25/76 TOTAL DEPTH: 405 ft. LAND TYPE: FED

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG--Top: N/A' Bottom: N/A' Used 0 sx. Class "B" (1.18 cu.ft./sk).

WATER DEPTH: 60 ' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A '

COKE: 6345 lbs. of Metallurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10CD TOP ANODE @ 220 ft. BOTTOM ANODE @ 395 ft.

VENT PIPE: 1" PVC Set @ 405 ft. Vent pipe perforated from 200 ft. to 405 ft.

REMARKS: _____

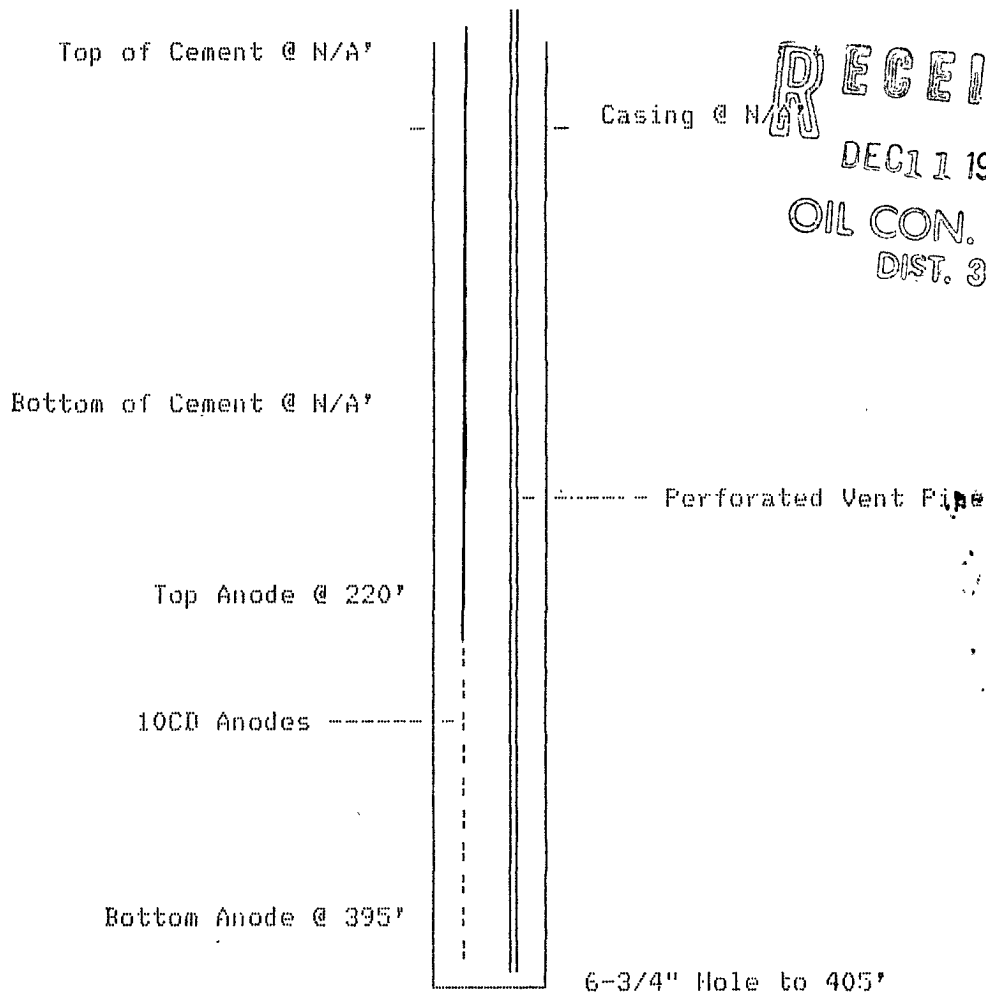

RECEIVED
DEC 11 1991
OIL CON. DIV.
DIST. 3



GENERAL
CORROSION
SERVICES

SHEET NO. 1

JOB NO. 60102-1

DATE: 2-25-76

SURVEY: Cox Canyon #11 & 4

BY: BT

TEST LOCATION							
#1	395	100	12.0	250	4.0	400	3.8
#2	350		19.0		3.8	405	4.0
#3	335		28.0		3.4		
#4	325		25.0		4.1		
#5	315		18.0		4.1		
#6	305	125	14.0	275	4.6	425	
#7	275		10.0		5.6		
#8	265		10.0		6.2		
#9	255		9.8		5.6		
#10	220		10.0		5.4		
		150	11.0	300	5.1		
			13.0		3.3		
			11.0		3.6		
			10.0		3.9		
			11.0		3.2		
		175	11.0	325	3.6		
			10.0		3.6		
			10.0		4.2		
			11.0		4.8		
			10.0		5.1		
		200	10.0	350	4.4		
			10.0		4.6		
			8.3		6.0		
			5.5		7.5		
			5.0		7.2		
		225	6.6	375	7.8		
			7.2		7.6		
			7.0		5.2		
			6.2		4.2		
		245	5.1	395	3.6		

NOTES:

Wet At 60' Had To Mud At 60'
74 52 CR