

30-045-08930

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator Texaco E&P Inc. Location: Unit N Sec. 32 Twp 30N Rng 11W

Name of Well/Wells or Pipeline Serviced Fed State Com "A" #1

Elevation _____ Completion Date 12/15/78 Total Depth 300' Land Type* _____

Casing, Sizes, Types & Depths 6 3/4" hole to 300'

If Casing is cemented, show amounts & types used Unknown

If Cement or Bentonite Plugs have been placed, show depths & amounts used
Unknown

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. See attached log

Depths gas encountered: _____


Type & amount of coke breeze used: _____

Depths anodes placed: See attached log

Depths vent pipes placed: _____

Vent pipe perforations: _____

Remarks: _____

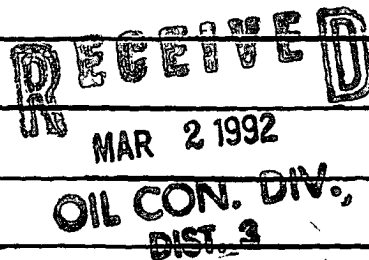

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

DATA SHEET NO.

DEPTH, FT.	DRILLER'S LOG	DRILL PIPE TO STRUCTURE			EXPLORING ANODE TO STRUCTURE			DEPTH, TOP OF ANODES
		E	I	R	E	I	R	
150'	150' Water						4.0	
5							5.1	
160							3.5	
5							3.1	
170							3.0	
5							2.8	
180							2.5	
5							2.5	
190							2.7	
5							2.7	
200		FINAL					2.5	
5							2.6	
210				1.1		X	2.5	8-210
5							2.4	
220				1.0		X	2.3	7-220
5							2.5	
230				1.1		X	2.4	6-230
5							2.4	
240				1.1		X	2.4	5-240
5				1.1			2.5	
250							2.4	
5				1.2		X	2.5	4-255
260							2.5	
5				1.0		X	2.2	3-265
270							2.0	
5				1.0		X	2.1	2-275
280							2.1	
5				1.0		X	2.0	1-285
290							2.0	
5								
300	TD 300							

GROUND BED RESISTANCE: (1) VOLTS _____ + AMPS _____ = _____ OHMS

(2) VIBROGROUND 0.42 OHMS