

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505
AS DRILLED

Form C-102
Revised October 12, 2005
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies
☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-045-34685	² Pool Code 80690	³ Pool Name So. Los Pinos Frt/Sand Pictured Cliffs
⁴ Property Code 19641	⁵ Property Name Northeast Blanco Unit	⁶ Well Number 256H
⁷ OGRID No. 06137	⁸ Operator Name Devon Energy Production Company, L.P.	⁹ Elevation 6344' GL

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	34	31-N	7-W		550'	NORTH	2565'	EAST	San Juan


¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H	34	31-N	7-W		1894'	NORTH	703'	EAST	San Juan

¹² Dedicated Acres NE/4-160	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
---	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

5280' ®

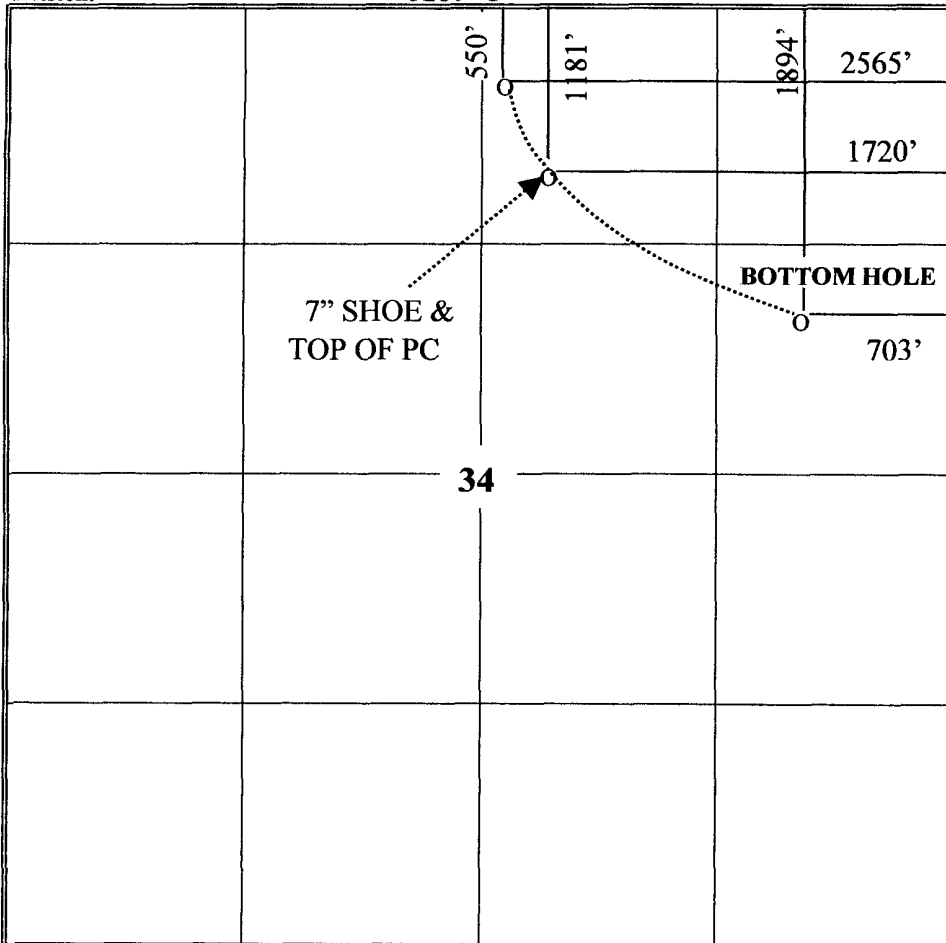


¹⁷ OPERATOR CERTIFICATION <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i>	
Signature <i>Mike Pippin</i>	Date 11/18/08
Printed Name Mike Pippin	
RCVD DEC 19 '08 OIL CONS. DIV.	
¹⁸ SURVEYOR CERTIFICATION <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i>	
Date of Survey 4/14/04	
Signature and Seal of Professional Surveyor: Gary D. Mann	
7016 Certificate Number	

5280' (R)

Company: Devon Energy
 Lease/Well: NEBU 256 H
 Location: San Juan County
 State/Country: New Mexico



REV'D 04/18/08
 OIL CONS. DIV.
 DIST. 3

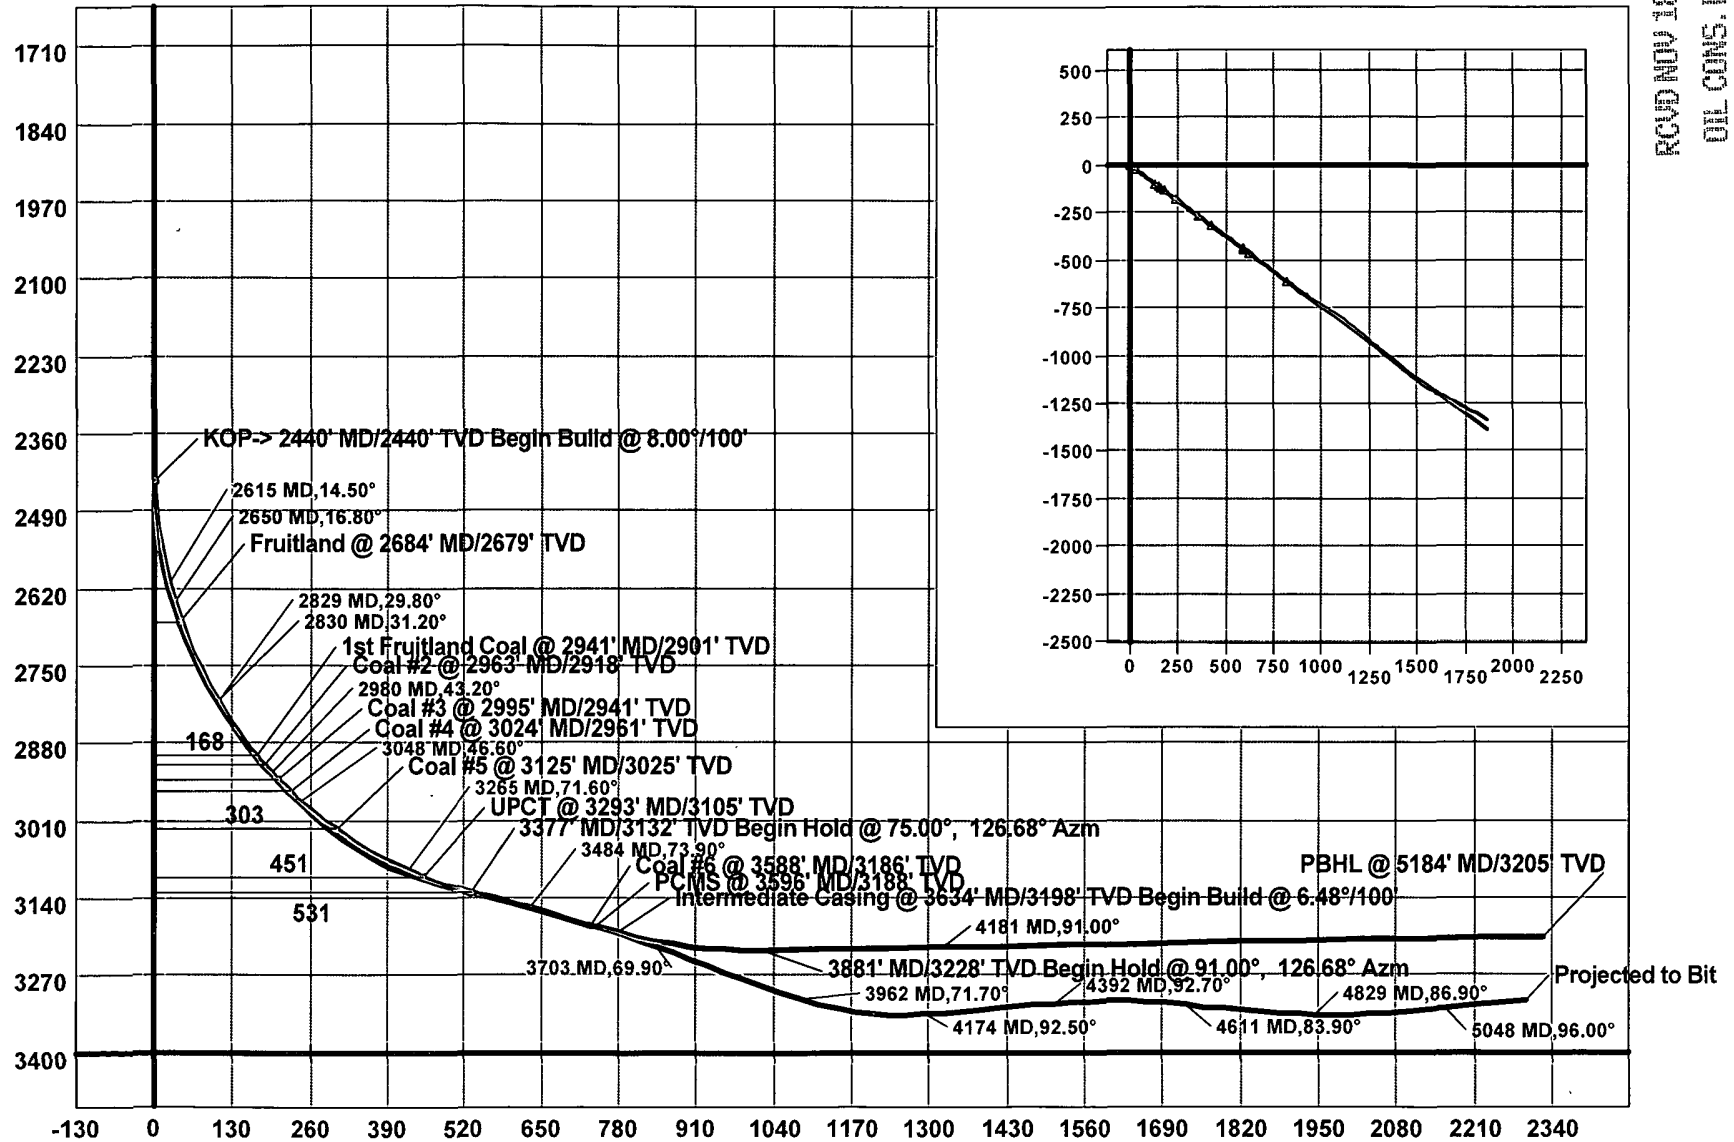

30-045-34685



Job Number: 08224
 Company: Devon Energy
 Lease/Well: NEBU 256 H
 Location: San Juan County
 Rig Name:
 RKB:
 G.L. or M.S.L.:

State/Country: New Mexico
 Declination:
 Grid:
 File name: J:\CUST08~1\SURVEYS\DEVON\08224.SVY
 Date/Time: 25-Sep-08 / 07:25
 Curve Name: AS Drilled

Inwell, Inc

WINSERVE SURVEY CALCULATIONS
 Minimum Curvature Method
 Vertical Section Plane 126.68
 Vertical Section Referenced to Wellhead
 Rectangular Coordinates Referenced to Wellhead


Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	C L O S U R E		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
2439.71	.00	.00	2439.71	.00	.00	.00	.00	.00	.00
2459.00	3.20	120.00	2458.99	-.27	.47	.53	.54	120.00	16.59
2491.00	5.80	122.70	2490.89	-1.59	2.60	3.04	3.05	121.43	8.15
2522.00	8.30	126.20	2521.65	-3.76	5.73	6.84	6.85	123.28	8.18
2552.00	10.50	129.30	2551.25	-6.77	9.59	11.73	11.74	125.22	7.52
2584.00	12.50	129.50	2582.60	-10.82	14.52	18.10	18.10	126.69	6.25
2615.00	14.50	129.30	2612.75	-15.41	20.11	25.33	25.34	127.46	6.45
2645.00	16.30	128.50	2641.67	-20.41	26.31	33.29	33.30	127.80	6.04
2676.00	18.40	128.20	2671.26	-26.15	33.56	42.53	42.54	127.92	6.78

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	C L O S U R E		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
2707.00	20.90	128.20	2700.45	-32.59	41.75	52.95	52.97	127.97	8.06
2736.00	23.20	128.00	2727.32	-39.31	50.32	63.84	63.85	128.00	7.94
2768.00	25.50	128.00	2756.48	-47.43	60.72	77.03	77.05	128.00	7.19
2799.00	27.60	127.70	2784.21	-55.93	71.66	90.88	90.90	127.97	6.79
2829.00	29.80	127.20	2810.52	-64.69	83.10	105.28	105.31	127.90	7.38
2860.00	32.60	126.40	2837.03	-74.30	95.96	121.34	121.36	127.75	9.13
2892.00	35.20	125.80	2863.59	-84.82	110.38	139.19	139.20	127.54	8.19
2923.00	38.00	125.40	2888.47	-95.57	125.41	157.66	157.67	127.31	9.06
2954.00	40.20	126.50	2912.53	-107.05	141.23	177.21	177.22	127.16	7.44
2986.00	42.00	127.20	2936.64	-119.67	158.06	198.25	198.25	127.13	5.81
3017.00	44.00	128.40	2959.32	-132.63	174.76	219.38	219.39	127.20	6.97
3048.00	46.60	129.80	2981.12	-146.53	191.85	241.39	241.41	127.37	8.98
3079.00	49.10	130.20	3001.92	-161.30	209.46	264.34	264.37	127.60	8.12
3111.00	51.20	129.70	3022.42	-177.08	228.29	288.86	288.92	127.80	6.67
3142.00	53.80	128.00	3041.30	-192.50	247.45	313.43	313.50	127.88	9.45
3172.00	56.80	126.20	3058.37	-207.37	267.12	338.09	338.16	127.82	11.15
3203.00	60.80	125.90	3074.43	-222.97	288.55	364.60	364.66	127.69	12.93
3234.00	65.70	125.40	3088.38	-239.09	311.04	392.27	392.32	127.55	15.87
3265.00	71.60	125.20	3099.66	-255.77	334.60	421.12	421.16	127.39	19.04
3296.00	75.30	126.20	3108.49	-273.11	358.72	450.83	450.85	127.28	12.33
3328.00	75.20	126.40	3116.64	-291.43	383.66	481.77	481.80	127.22	.68
3359.00	75.20	126.00	3124.55	-309.13	407.85	511.74	511.76	127.16	1.25
3391.00	75.40	125.70	3132.67	-327.26	432.94	542.69	542.71	127.09	1.10
3422.00	75.60	125.20	3140.44	-344.66	457.39	572.70	572.71	127.00	1.69
3453.00	75.70	125.20	3148.12	-361.98	481.93	602.72	602.73	126.91	.32
3484.00	73.90	125.50	3156.25	-379.28	506.33	632.63	632.63	126.84	5.88
3516.00	73.30	125.20	3165.28	-397.04	531.36	663.32	663.32	126.77	2.08
3547.00	73.40	125.20	3174.16	-414.16	555.63	693.01	693.01	126.70	.32
3578.00	73.30	125.50	3183.05	-431.35	579.86	722.70	722.70	126.64	.98

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	C L O S U R E		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
3609.00	73.40	125.90	3191.93	-448.68	603.98	752.40	752.40	126.61	1.28
3641.00	72.00	125.90	3201.44	-466.59	628.73	782.94	782.95	126.58	4.37
3673.00	71.70	125.70	3211.41	-484.38	653.39	813.35	813.35	126.55	1.11
3703.00	69.90	126.20	3221.28	-501.01	676.32	841.68	841.68	126.53	6.20
3735.00	69.20	126.80	3232.46	-518.85	700.42	871.66	871.66	126.53	2.81
3766.00	69.00	128.20	3243.52	-536.48	723.40	900.62	900.62	126.56	4.27
3796.00	68.60	128.20	3254.37	-553.77	745.38	928.58	928.58	126.61	1.33
3827.00	69.30	127.50	3265.50	-571.52	768.22	957.50	957.50	126.65	3.09
3856.00	69.50	127.90	3275.70	-588.12	789.70	984.64	984.64	126.68	1.46
3930.00	71.40	127.20	3300.47	-630.62	844.99	1054.36	1054.36	126.73	2.72
3962.00	71.70	127.50	3310.59	-649.04	869.12	1084.72	1084.72	126.75	1.29
3993.00	74.20	126.20	3319.68	-666.81	892.83	1114.35	1114.35	126.75	9.01
4023.00	77.80	124.20	3326.94	-683.58	916.62	1143.44	1143.44	126.71	13.63
4053.00	81.50	123.00	3332.33	-699.91	941.19	1172.91	1172.91	126.64	12.95
4084.00	86.00	122.20	3335.70	-716.50	967.15	1203.64	1203.64	126.53	14.74
4112.00	88.60	121.80	3337.02	-731.32	990.87	1231.51	1231.52	126.43	9.39
4142.00	90.90	123.20	3337.15	-747.44	1016.16	1261.43	1261.45	126.34	8.98
4174.00	92.50	123.50	3336.20	-765.02	1042.88	1293.36	1293.39	126.26	5.09
4205.00	94.10	123.80	3334.42	-782.17	1068.64	1324.26	1324.31	126.20	5.25
4236.00	94.70	123.70	3332.04	-799.34	1094.34	1355.13	1355.19	126.15	1.96
4267.00	94.80	125.50	3329.47	-816.89	1119.77	1386.00	1386.07	126.11	5.80
4298.00	95.10	127.20	3326.80	-835.19	1144.65	1416.89	1416.95	126.12	5.55
4329.00	96.00	126.40	3323.80	-853.67	1169.35	1447.74	1447.81	126.13	3.88
4361.00	95.30	127.50	3320.65	-872.82	1194.80	1479.58	1479.65	126.15	4.06
4392.00	92.70	130.70	3318.49	-892.32	1218.79	1510.47	1510.52	126.21	13.28
4423.00	92.80	132.00	3317.00	-912.77	1242.04	1541.33	1541.37	126.31	4.20
4454.00	93.30	132.50	3315.35	-933.59	1264.95	1572.14	1572.16	126.43	2.28
4486.00	91.00	132.40	3314.15	-955.17	1288.54	1603.96	1603.96	126.55	7.19
4517.00	88.90	133.00	3314.18	-976.19	1311.33	1634.78	1634.78	126.67	7.05

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	C L O S U R E		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
4548.00	86.60	132.90	3315.39	-997.29	1334.00	1665.57	1665.58	126.78	7.43
4579.00	84.40	131.80	3317.83	-1018.11	1356.83	1696.32	1696.33	126.88	7.93
4611.00	83.90	129.70	3321.09	-1038.89	1380.95	1728.07	1728.09	126.95	6.71
4642.00	84.30	129.80	3324.27	-1058.61	1404.66	1758.87	1758.89	127.00	1.33
4674.00	85.10	127.00	3327.23	-1078.40	1429.62	1790.71	1790.74	127.03	9.06
4705.00	85.50	127.80	3329.77	-1097.16	1454.17	1821.60	1821.64	127.03	2.88
4737.00	86.20	127.90	3332.09	-1116.74	1479.37	1853.51	1853.55	127.05	2.21
4768.00	86.70	126.40	3334.01	-1135.43	1504.03	1884.45	1884.49	127.05	5.09
4798.00	86.90	123.40	3335.68	-1152.56	1528.59	1914.39	1914.42	127.02	10.01
4829.00	86.90	121.00	3337.36	-1169.06	1554.79	1945.25	1945.27	126.94	7.73
4860.00	88.90	118.90	3338.49	-1184.52	1581.63	1976.01	1976.01	126.83	9.35
4891.00	91.80	118.50	3338.30	-1199.41	1608.81	2006.70	2006.70	126.71	9.44
4922.00	93.80	118.00	3336.79	-1214.06	1636.09	2037.33	2037.33	126.58	6.65
4954.00	94.20	119.00	3334.56	-1229.29	1664.14	2068.93	2068.94	126.45	3.36
4986.00	94.60	118.90	3332.10	-1244.74	1692.06	2100.54	2100.58	126.34	1.29
5017.00	95.10	118.80	3329.48	-1259.64	1719.11	2131.14	2131.21	126.23	1.64
5048.00	96.00	117.90	3326.48	-1274.29	1746.27	2161.67	2161.78	126.12	4.10
5079.00	96.00	117.90	3323.24	-1288.72	1773.51	2192.14	2192.29	126.00	.00
5110.00	94.50	122.50	3320.41	-1304.25	1800.19	2222.80	2223.00	125.92	15.55
Projected to Bit									
5184.00	94.50	122.50	3314.60	-1343.88	1862.40	2296.38	2296.64	125.81	.00

Company: Devon Energy
 Lease/Well: NEBU 256 H
 Location: San Juan County
 State/Country: New Mexico

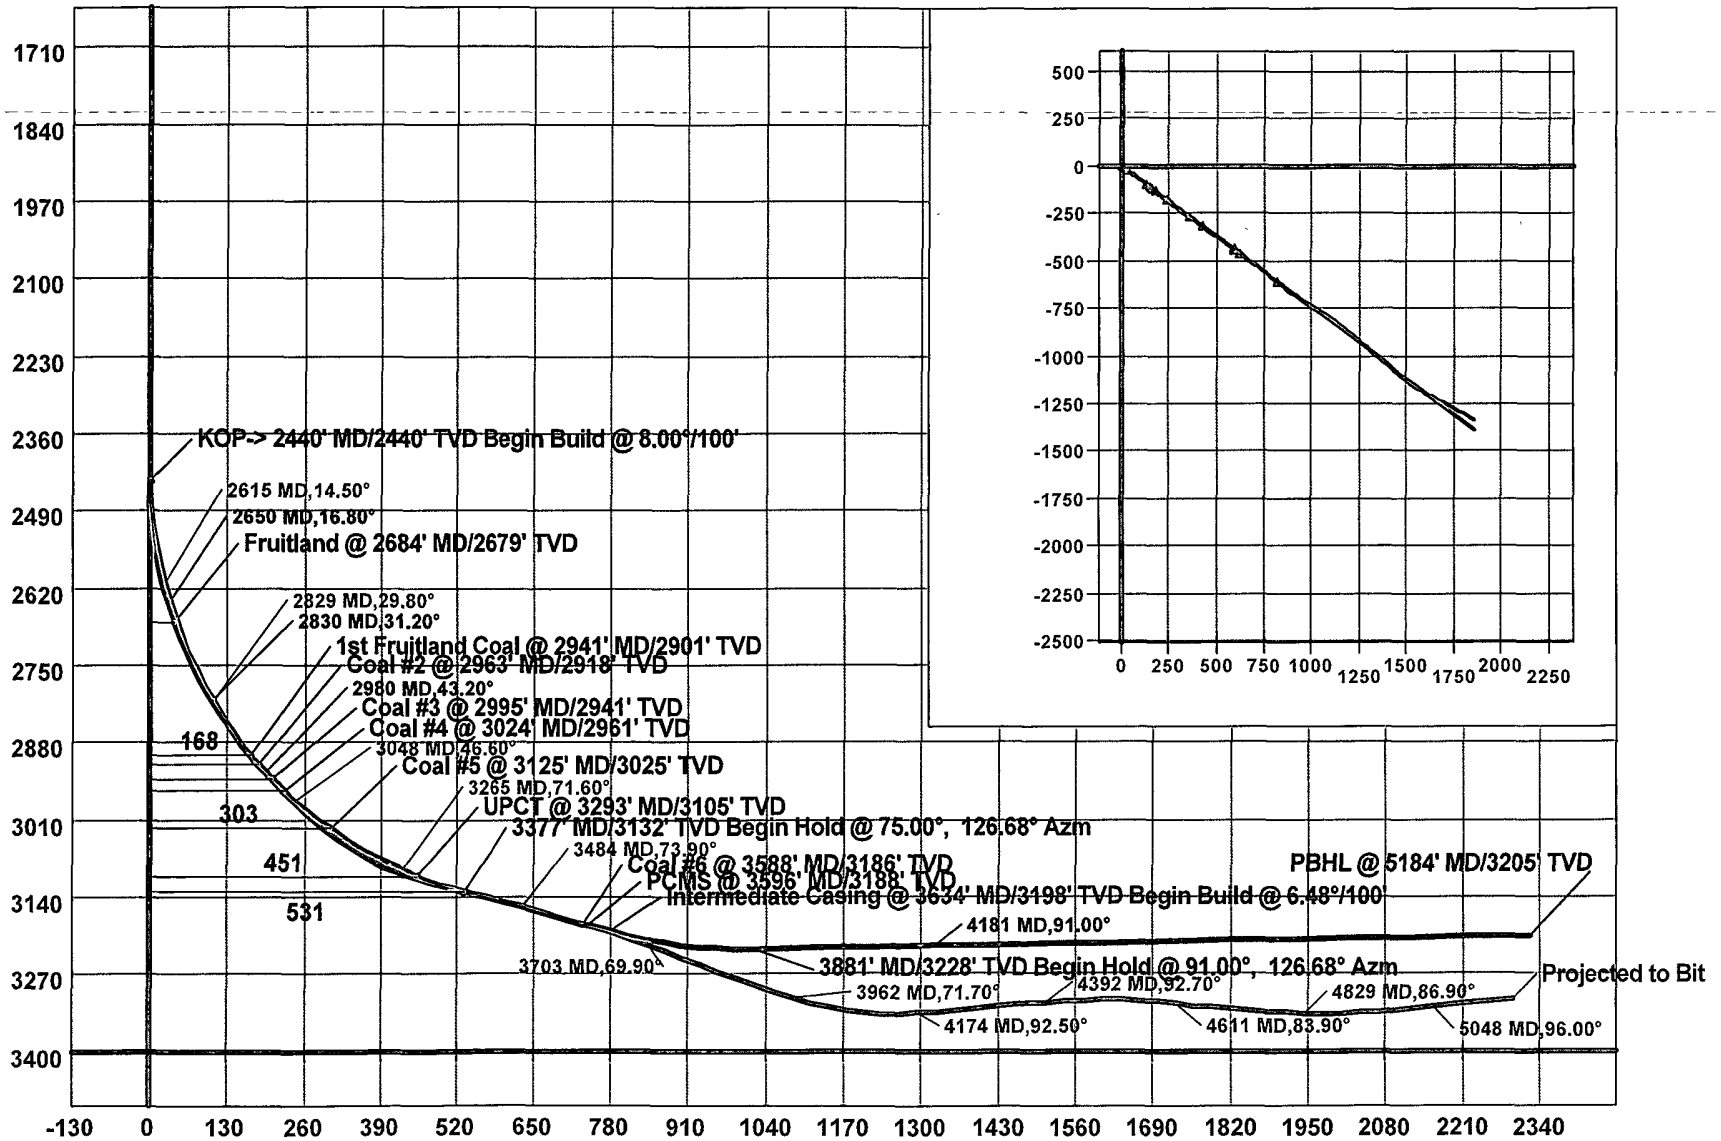

2007-05-10
 00:00:00