



LOG OF OIL OR GAS WELL

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

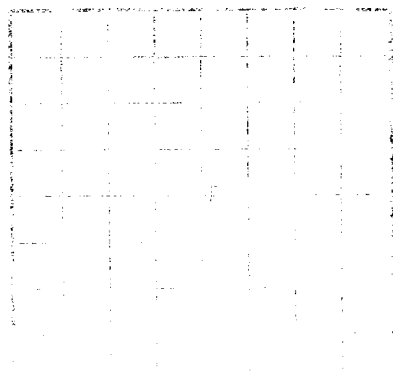

Attached: Drilling History

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give its size and location. If the well has been dynamited, give date, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or bailing.

HISTORY OF OIL OR GAS WELL

16-48004-2 U. S. GOVERNMENT PRINTING OFFICE

FROM-	TO-	TOTAL FEET	FORMATION
FORMATION RECORD			
EMPTIED			
DATE			
TOOLS USED			
SHOOTING RECORD			
PISTOLS AND ADAPTERS			
RECORDING AND CORRECTING RECORD			

DRILLING REPORT

FOR PERIOD ENDING

8-27-57

15

(SECTION OR LEASE)

T25N R12W

(TOWNSHIP OR RANCHO)

Bisti

(FIELD)

San Juan, New Mexico

(COUNTY)

DAY	DEPTHS		REMARKS
	FROM	TO	
57			<u>Location:</u> 790' S and 1980' W of NE Corner, Section 15, T25N, R12W, NMPM, San Juan County, New Mexico <u>Elevation:</u> DF 6220.8 Gr 6213.5 KB 6222.0
8-19	0	1681	Spudded 3:00 P.M. 8-19-57. Ran and cemented 8-5/8", 24#, J-55 Spang casing at 94' with 85 sacks cement treated with 2% calcium chloride. Good returns to surface. Flanged up and waited on cement. Pressure tested casing and BOP with 700 psi. for 15 minutes, O.K.
8-20 to 8-25	1681	4725	<u>Drilled 3044'</u>
8-26 to 8-27	4725	4850	<u>Drilled 125'</u>. Ran Electrical Survey and Microlog. Ran and cemented 4-1/2", 9.5# casing at 4848' with 150 sacks 4% gel treated cement. Displaced with oil. Released rig 2:00 P.M. 8-27-57. Checked BOP daily. Mud Summary: Wt 9.5-9.8#/gal. Vis. 42-100 sec. WL 6-6.2 cc FC 2/32" Contractor: Brinkerhoff Drilling Company Dillers: M. D. Schulze R. C. Cary J. Ham

CONDITION AT BEGINNING OF PERIOD				
HOLE			CASING SIZE	DEPTH SET
SIZE	FROM	TO		

DRILL PIPE SIZES	



R. D. ALLEN

SIGNED

Bisti

DRILLING REPORT

FOR PERIOD ENDING

10-29-57

15

(FIELD)
San Juan, New Mexico
(COUNTY)(SECTION OR LEASE)
T25N R12W

(TOWNSHIP OR RANCHO)

DAY 57	DEPTHS		REMARKS
	FROM	TO	
9-2			Ran Gamma Ray-Collar Log, Jet perforated four 1/2" holes/ft 4726-44, 4802-14, 4819-30, Ran 2" tubing to 4704'.
10-27	4850	TD	Swabbed to sump 6 hours, Fluid level 400'.
10-28			Well began flowing
10-29			Flowed 24 hours, 133 bbls. gross, 64/64" bean, TP 10, CP 0
10-30			<u>INITIAL PRODUCTION</u> Flowed 24 hours, 108 bbls gross, 64/64" bean, TP 20, no gas measurement. Completed 10-30-57.

CONDITION AT BEGINNING OF PERIOD

HOLE			CASING SIZE	DEPTH SET
SIZE	FROM	TO		
12-1/4"	0	94	8-5/8"	85
7-7/8"	94	4850	4-1/2"	4848'
DRILL PIPE 4-1/2"				
SIZES				



E. B. JOHNSTONE

SIGNED