


U. S. LAND OFFICE Santa Fe, N.M.

SERIAL NUMBER NM 036254

LEASE OR PERMIT TO PROSPECT -----

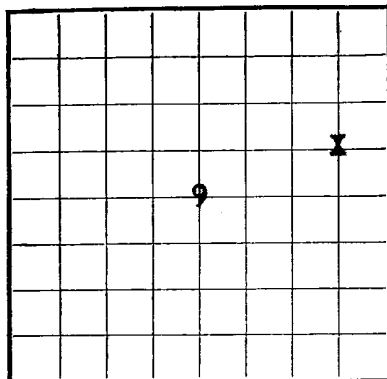

SHELL OIL COMPANY

Gov't

WELL NO. 42-9Bisti

DRILLING REPORT

FOR PERIOD ENDING

11-8-57

9

(FIELD)
San Juan New Mexico
(COUNTY)(SECTION OR LEASE)
T25N R12W
(TOWNSHIP OR RANCH)

DAY	DEPTHS		REMARKS													
	FROM	TO														
			<u>Location:</u> 660' W and 1781' S of NE Corner, Section 9, T25N, R12W, N.M.P.M., San Juan County, New Mexico. Elevations: DF 6220.3 GR 6213.0 KB 6221.5													
10-31 To 11-1	0	2080	Spudded 3:00 P.M. 10-31-57. Ran and cemented (99') 8-5/8", 28#, J-55 Spang casing at 109' with 100 sacks cement treated with 2% calcium chloride. Good returns to surface. Flanged up and waited on cement. Pressure tested casing and BOP with 500 psi for 30 minutes, OK.													
11-2 To 11-6	2080	4785	<u>Drilled 2705'.</u>													
11-7	4785	4900	<u>Drilled 115'.</u> Ran Electrical Survey and Microlog.													
11-8	4900	TD	Ran and cemented (4885') 4-1/2", 9.5# casing at 4895' with 150 sacks cement treated with 4% gel. Displaced with oil, final pressure 1500 psi. Released rig 4:00 A. M. 11-8-57. Checked BOP daily Mud Summary wt 9.6 - 9.7 #/gal vis 49 - 90 sec WL 5.6 - 6.8 cc FC 1-2/32"													
CONDITION AT BEGINNING OF PERIOD <table border="1"> <thead> <tr> <th colspan="3">HOLE</th> <th rowspan="2">CASING SIZE</th> <th rowspan="2">DEPTH SET</th> </tr> <tr> <th>SIZE</th> <th>FROM</th> <th>TO</th> </tr> </thead> <tbody> <tr> <td colspan="3">DRILL PIPE SIZES</td> <td></td> <td></td> </tr> </tbody> </table>				HOLE			CASING SIZE	DEPTH SET	SIZE	FROM	TO	DRILL PIPE SIZES				
HOLE			CASING SIZE	DEPTH SET												
SIZE	FROM	TO														
DRILL PIPE SIZES																

Contractor: Brinkerhoff Drilling Co.
 Drillers: M. D. Schulze
 G. M. Benton
 R. C. Cary

