

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R1424.
5. LEASE DESIGNATION AND SERIAL NO.
SF 077329

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER ☐	7. UNIT AGREEMENT NAME
2. NAME OF OPERATOR AMOCO PRODUCTION COMPANY	8. FARM OR LEASE NAME Eva E. Martin "A"
3. ADDRESS OF OPERATOR 501 Airport Drive, Farmington, New Mexico 87401	9. WELL NO. 1
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface Unit "K", 1650' FSL & 2310' FWL, Section 14, T-27N, R-10W	10. FIELD AND POOL, OR WILDCAT Fulcher Kutz Pictured Cliffs
14. PERMIT NO.	15. ELEVATIONS (Show whether DF, RT, GR, etc.) 6174' GL, 6179' KB
	11. SEC., T., R., M., OR BLK. AND NE/4 SW/4 Section 14, T-27-N, R-10-W
	12. COUNTY OR PARISH San Juan
	13. STATE New Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data


NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF ☐	PULL OR ALTER CASING ☐	WATER SHUT-OFF ☒	REPAIRING WELL ☒
FRACTURE TREAT ☐	MULTIPLE COMPLETE ☐	FRACTURE TREATMENT ☒	ALTERING CASING ☒
SHOOT OR ACIDIZE ☐	ABANDON* ☐	SHOOTING OR ACIDIZING ☐	ABANDONMENT* ☐
REPAIR WELL ☐	CHANGE PLANS ☐	(Other) ☐	

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) *

On July 2, 1973, Amoco ran 3-1/2" casing to 2152' and cemented this casing with 150 sacks of Class "C" 50-50 Pozmix with 6% Gel and 2 pounds Tuf Plug per sack. This was followed by 50 sacks of Class "C" Neat cement. Cement Bond and Gamma Ray-Neutron logs were run and the Pictured Cliffs was perforated at 2036-46, 2050-57, 2061-64 and 2066-71 with one shot per foot.

The well was then acidized with 750 gallons of 15% HCl and sand-water fracture treated with 20,000 pounds of 10-20 sand and 15,000 pounds of 8-12 sand at 41 BPM and a treating pressure of 2400 psi. After cleanout, landed 1-1/4" tubing at 2044'. Swabbed well in and cleaned up. Repair complete July 24, 1973. Production before repair: 40 MCFD. Production after repair: 295 MCFD.

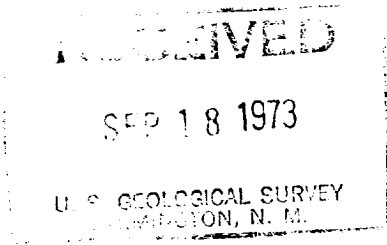

18. I hereby certify that the foregoing is true and correct

SIGNED <u>J. A. G. SELL</u>	TITLE <u>Area Engineer</u>	DATE <u>September 17, 1973</u>
(This space for Federal or State office use)		
APPROVED BY _____	TITLE _____	DATE _____
CONDITIONS OF APPROVAL, IF ANY:		

*See Instructions on Reverse Side

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.