

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

REMARKS IN OTHER HANDS
(Other instructions on re-
verse side)

5. LEASE DESIGNATION AND SURVEY NO.

SF 078200

6. IF INDIAN, ALLOTTEE OR TRUST NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

W. H. Riddle

9. WELL NO.

4

10. FIELD AND POOL, OR WILDCAT

Blanco Pictured Cliffs *Ept*

11. SEC. T. R. S. CORNER AND
SOLVER OR ALUM

NW/4 SW/4 Section 24,
T-30-N, R-10-W

12. COUNTY OR PARISH AND STATE

San Juan New Mexico

1. ☐ WELL ☒ OTHER

2. NAME OF OPERATOR

AMSCO PRODUCTION COMPANY

3. ADDRESS OF OPERATOR

501 Airport Drive, Farmington, New Mexico 87401

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*

(See page 17 below.)

1850' FSL & 800' FWL

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

Gr. 6283'

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

1. WATER SHUT-OFF ☐

PULL OR ALTER CASING ☐

2. REPAIRING WELL ☐

MULTIPLE COMPLETE ☐

3. ALTERING CASING ☐

ABANDON* ☐

4. SHOOTING OR ACIDIZING ☐

CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

REPAIRING WELL ☐

FRACTURE TREATMENT ☐

ALTERING CASING ☐

SHOOTING OR ACIDIZING ☐


ABANDONMENT* ☐

(Other) Perf and Frac ☒

(NOTE: Report results of multiple completion or well
Completion or Recompletion Report and Log form.)

16. ON COMPLETION OF OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of completion, if
applicable. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and notes perti-
nent to this work.)*

The W. H. Riddle No. 4 was perforated from 2904-2926' and 2936-2947' with one shot
per foot, and the hole was circulated with water containing 1% KCl. Spotted 550
gallons 15% HCl on the perforations. Started a frac fluid pad of water containing
1% KCl and 10 pounds Gel per 1000 gallons of water and established a rate of 30
BPM. Fraced with 25,000 pounds 20-40 sand and 7,500 pounds 8-12 sand. Breakdown
pressure 1700 pounds and maximum treating pressure 1950 pounds. AIR 50 BPM.

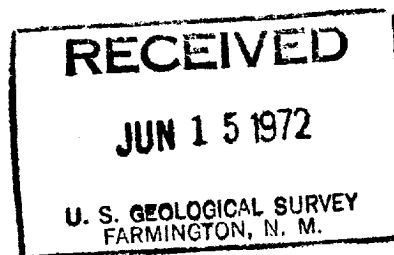

17. I hereby certify that the foregoing is true and correct

Original Signed by

TITLE

Area Engineer

DATE

June 14, 1972

(This space for Federal or State office use)

18. APPROVAL

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side