

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE
(Other instructions on reverse side)

Budget Bureau No. 1004-0135
Expires August 31, 1985

SF-078139

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

OIL WELL ☐ GAS WELL ☒ OTHER ☐

2. NAME OF OPERATOR

Amoco Production Co.

3. ADDRESS OF OPERATOR

501 Airport Drive, Farmington, N M 87401

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface

1790' FNL X 1455' FWL

1. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Elmer E. Elliott B

9. WELL NO.

9 E

10. FIELD AND POOL, OR WILDCAT

Basin Dakota

11. SEC., T., R., M., OR BLK. AND
SURTACE OR AREA

SE/NW Sec 26, T30N, R9W

12. COUNTY OR PARISH

San Juan

13. STATE

New Mexico

14. PERMIT NO.

NOV 12 1985

15. ELEVATIONS (Show whether of, RT, CR, etc.)

5902' GR

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

BUREAU OF LAND MANAGEMENT

FARMINGTON RESOURCE AREA

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF

FRACURE TREAT

ABANDON OR ACIDIZING

REPAIR WELL

(Other)

RELL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

WATER SHUT-OFF

FRACURE TREATMENT

ABANDON OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

Spud & Set Casing

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS: (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Spud a 12 1/4" hole on 10-21-85 at 1730 hours. Drilled to 351'. Set 9 5/8", 36#, J-55 surface casing at 351' and cemented with 330 cu. ft. Class B Ideal. Circulated cement to surface. Pressure tested casing to 1000 psi for 30 minutes. Drilled an 8 3/4" hole to 3100' on 10-25-85. Set 7", 20#, K-55 intermediate casing at 3100'. Cemented with 662 cu. ft. Class B 65:35 poz and tailed in with 118 cu. ft. Class B. Ran temperature survey (attached) which indicated the top of the cement to be at 600'. Drilled a 6 1/4" hole to a TD of 7260' on 10-29-85. Set 4 1/2", 11.6#, K-55 production casing at 7259'. Cemented with 493 cu. ft. Class B 50:50 poz and tailed in with 154 cu. ft. Class B 50:50 poz. Ran a temperature survey (attached) which indicated the top of the cement to be at 1800'. No DV tool was set and the rig was released on 10-30-85.

RECEIVED
NOV 18 1985
OIL CON. DIV.
DIST. 3

I hereby certify that the foregoing is true and correct

SIGNED

B. S. Shaw

TITLE

Adm. Supervisor

DATE

11-5-85

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

*See Instructions on Reverse Side

NMOCC

U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

WILSON

FORM 432-2

SERVICE COMPANY

TEMPERATURE SURVEY

COMPANY Amoco Production

WELL 9E LEASE Elmer E. Elliot B

COUNTY San Juan STATE New Mexico

SEC. 26 TWP. 30N RGE. 9W

APPROX. TOP CEMENT 600'

Survey Begins at 100' Ft. Ends at 2990' Ft.

Approx. Fill-Up Max. Temp.

Log Measured From KB Run No. 1

Casing Size	Casing Depth	Diam of Hole	Depth
7" from <u> </u> to <u> </u>		from <u>8 3/4"</u> to <u> </u>	
from <u> </u> to <u> </u>		from <u> </u> to <u> </u>	

Date of Cementing 10/25/85 Time 1:45 am

Date of Survey 10/25/85 Time 9:00 am


Amount of Cement 430. sx .65/.35/. Poz. + 100. sx .C1 B


Recorded by Ebert Witnessed by


REMARKS OR OTHER DATA

DA 1650'

TEMPERATURE IN DEGREES FAHRENHEIT

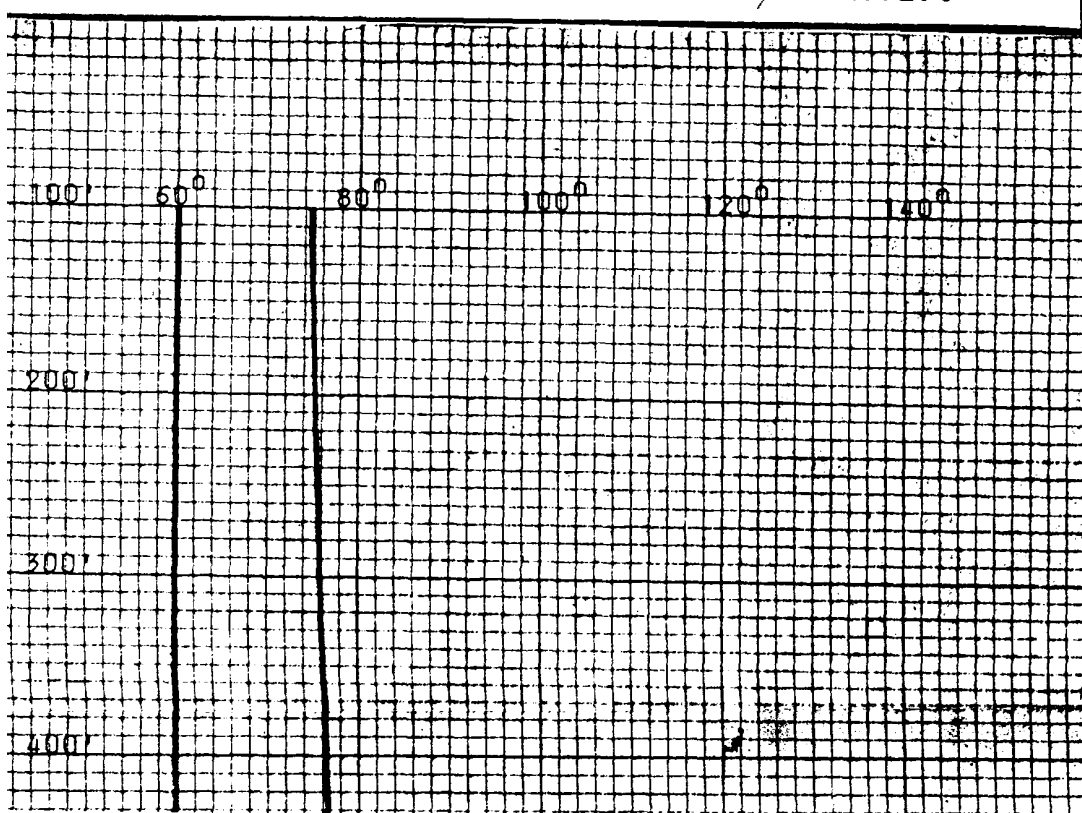

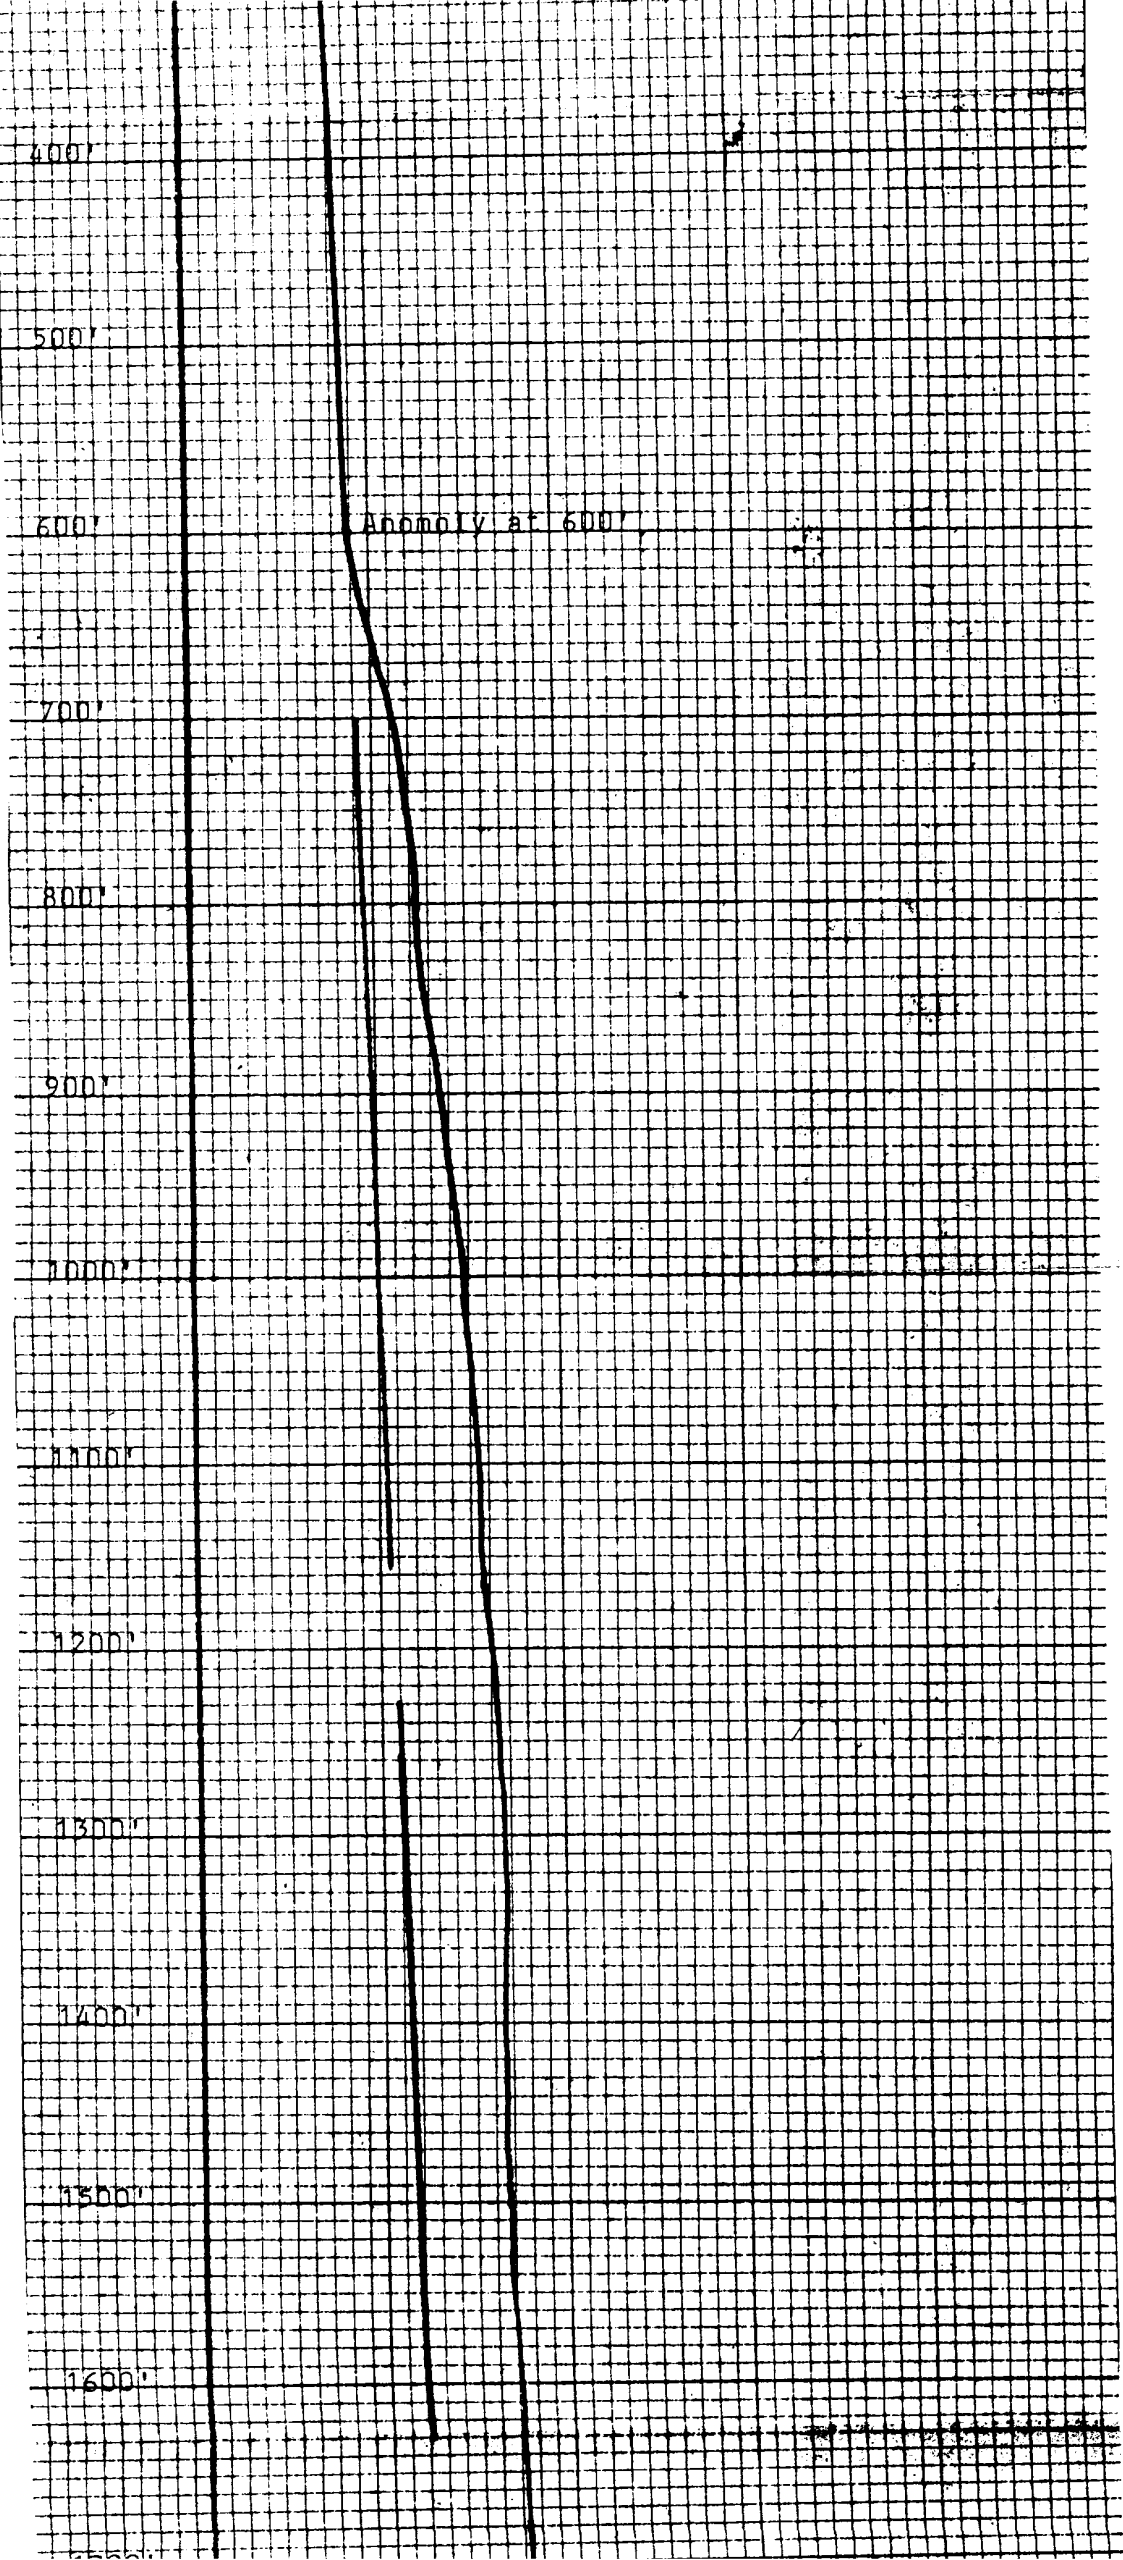

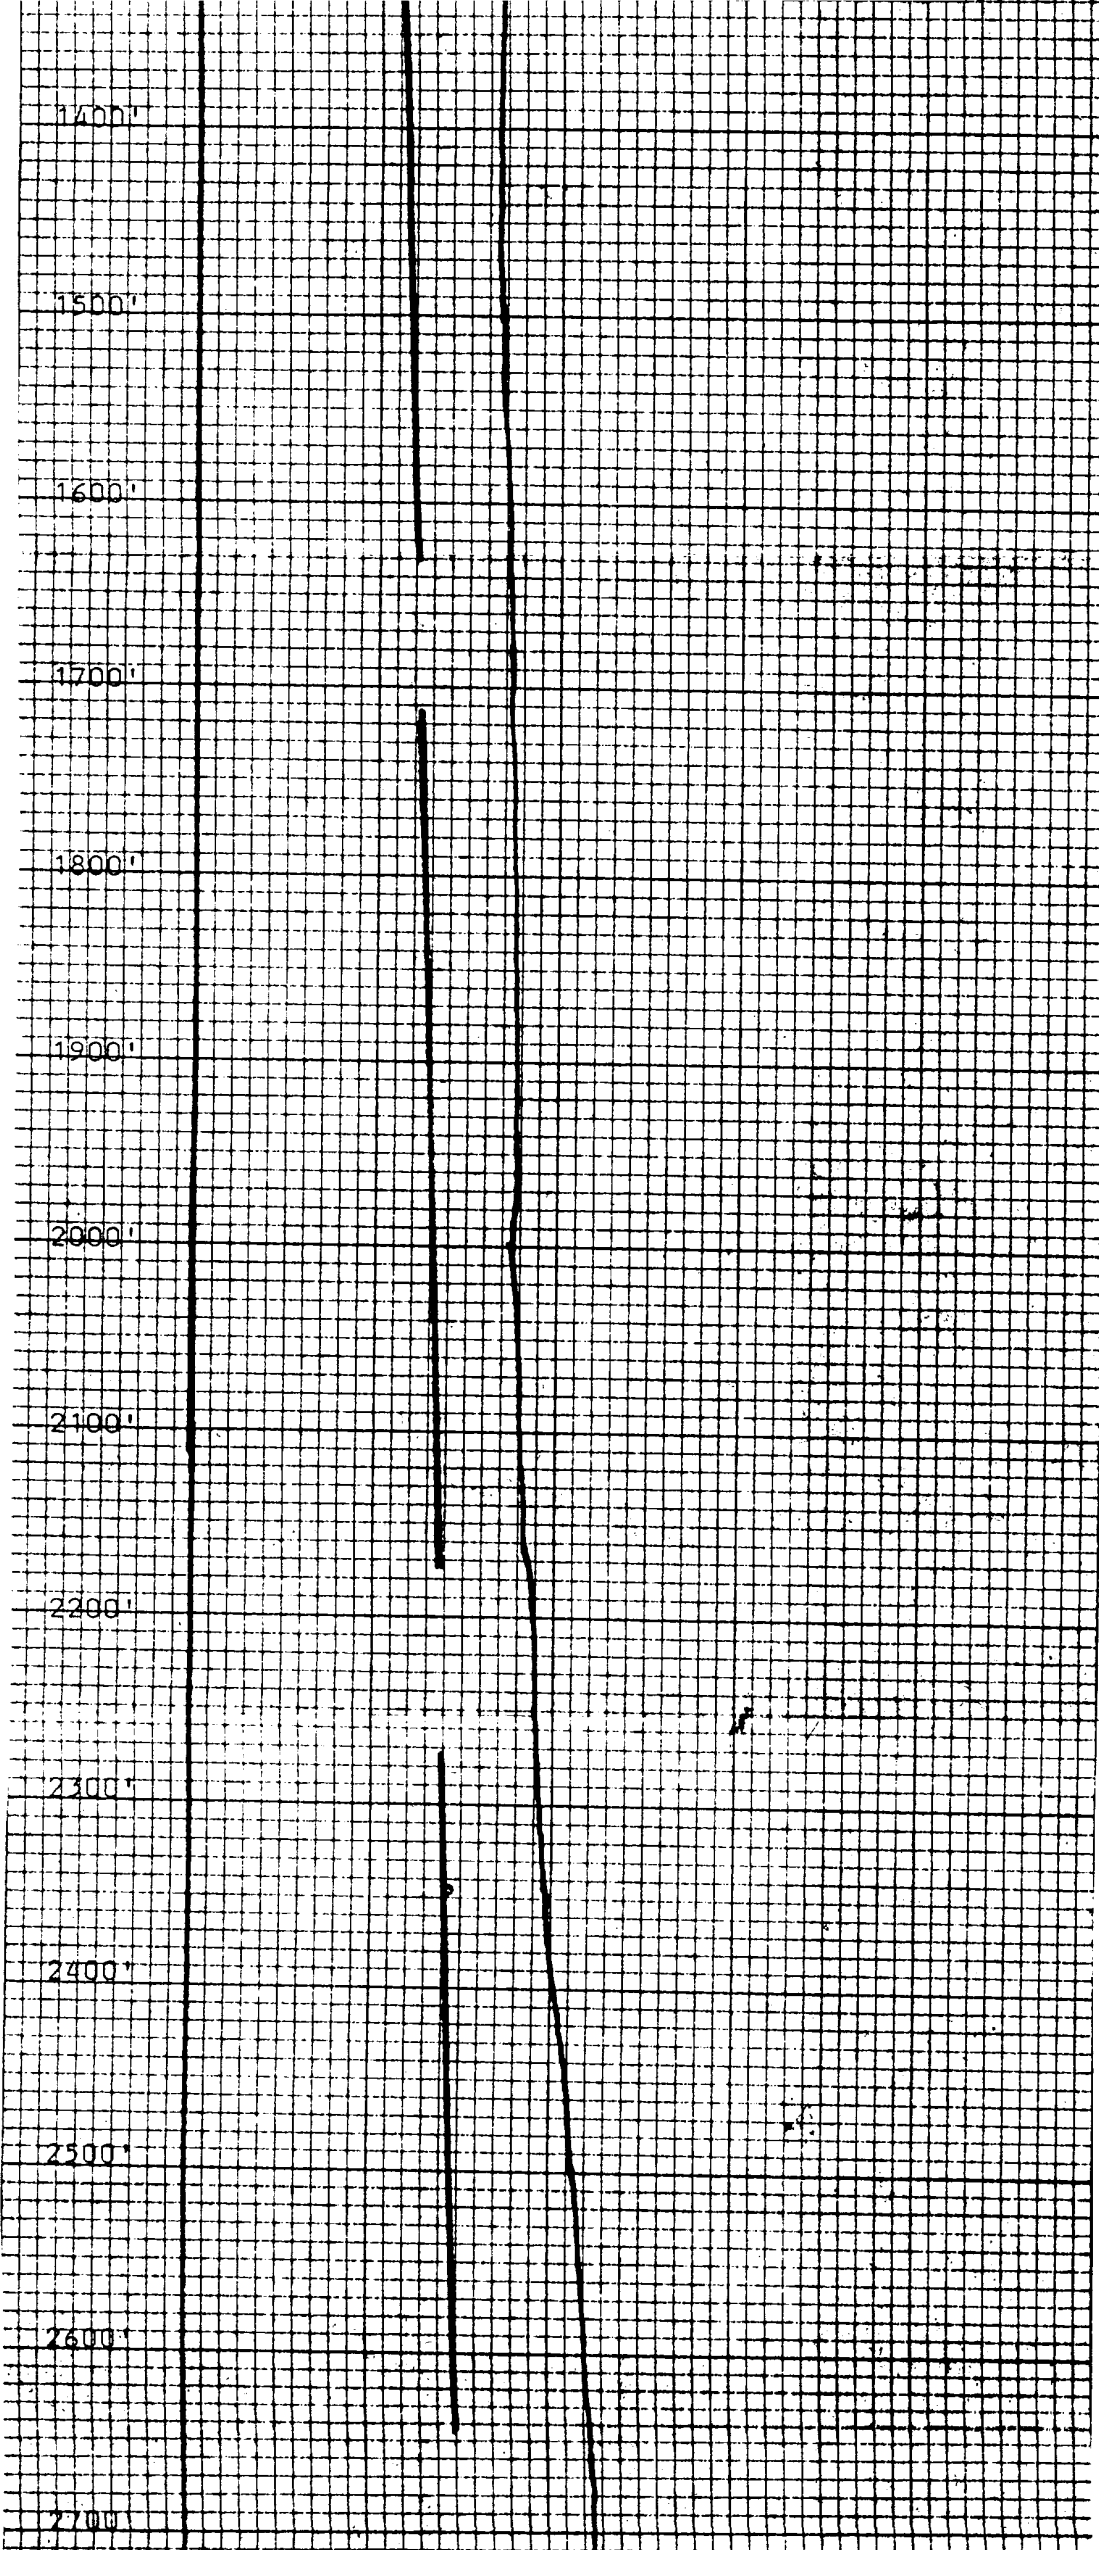

2100'

2200'

2300'

2400'

2500'

2600'

2700'

2800'

2900'

TD surveyed at 2990'

WILSON SERVICE COMPANY

FORM 432-2

TEMPERATURE SURVEY

COMPANY Amoco Production
WELL 9E LEASE Elmer E. Elliott B.
COUNTY San Juan STATE New Mexico
SEC. 26 TWP. 30N RGE. 9W

APPROX. TOP CEMENT 1800'

Survey Begins at 1000' Ft. Ends at 7220' Ft.

Approx. Fill-Up Max. Temp.

Log Measured From KB Run No. 1

Casing Size	Casing Depth	Diam of Hole	Depth
<u>4 1/2"</u> from <u> </u> to <u> </u>		from <u>6 1/2"</u> to <u> </u>	
from <u> </u> to <u> </u>		from <u> </u> to <u> </u>	

Date of Cementing 10/30/85 Time 5:15 am

Date of Survey 10/30/85 Time 2:30 pm


Amount of Cement 420 sx

Recorded by Ebert Witnessed by

REMARKS OR OTHER DATA

FC @ 7260'


TEMPERATURE IN DEGREES FAHRENHEIT

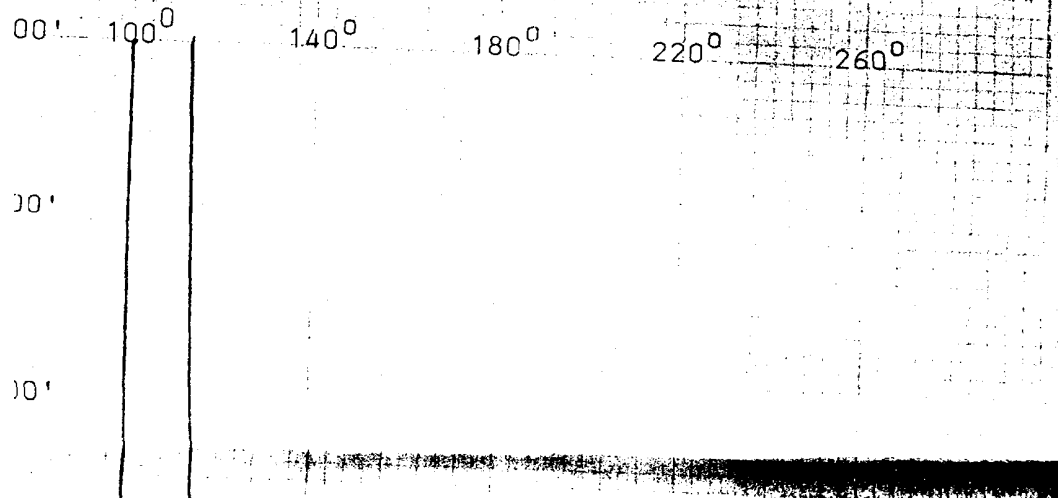


TEMPERATURE IN DEGREES FAHRENHEIT

100° 140° 180° 220° 260°

Anomaly at 1800'

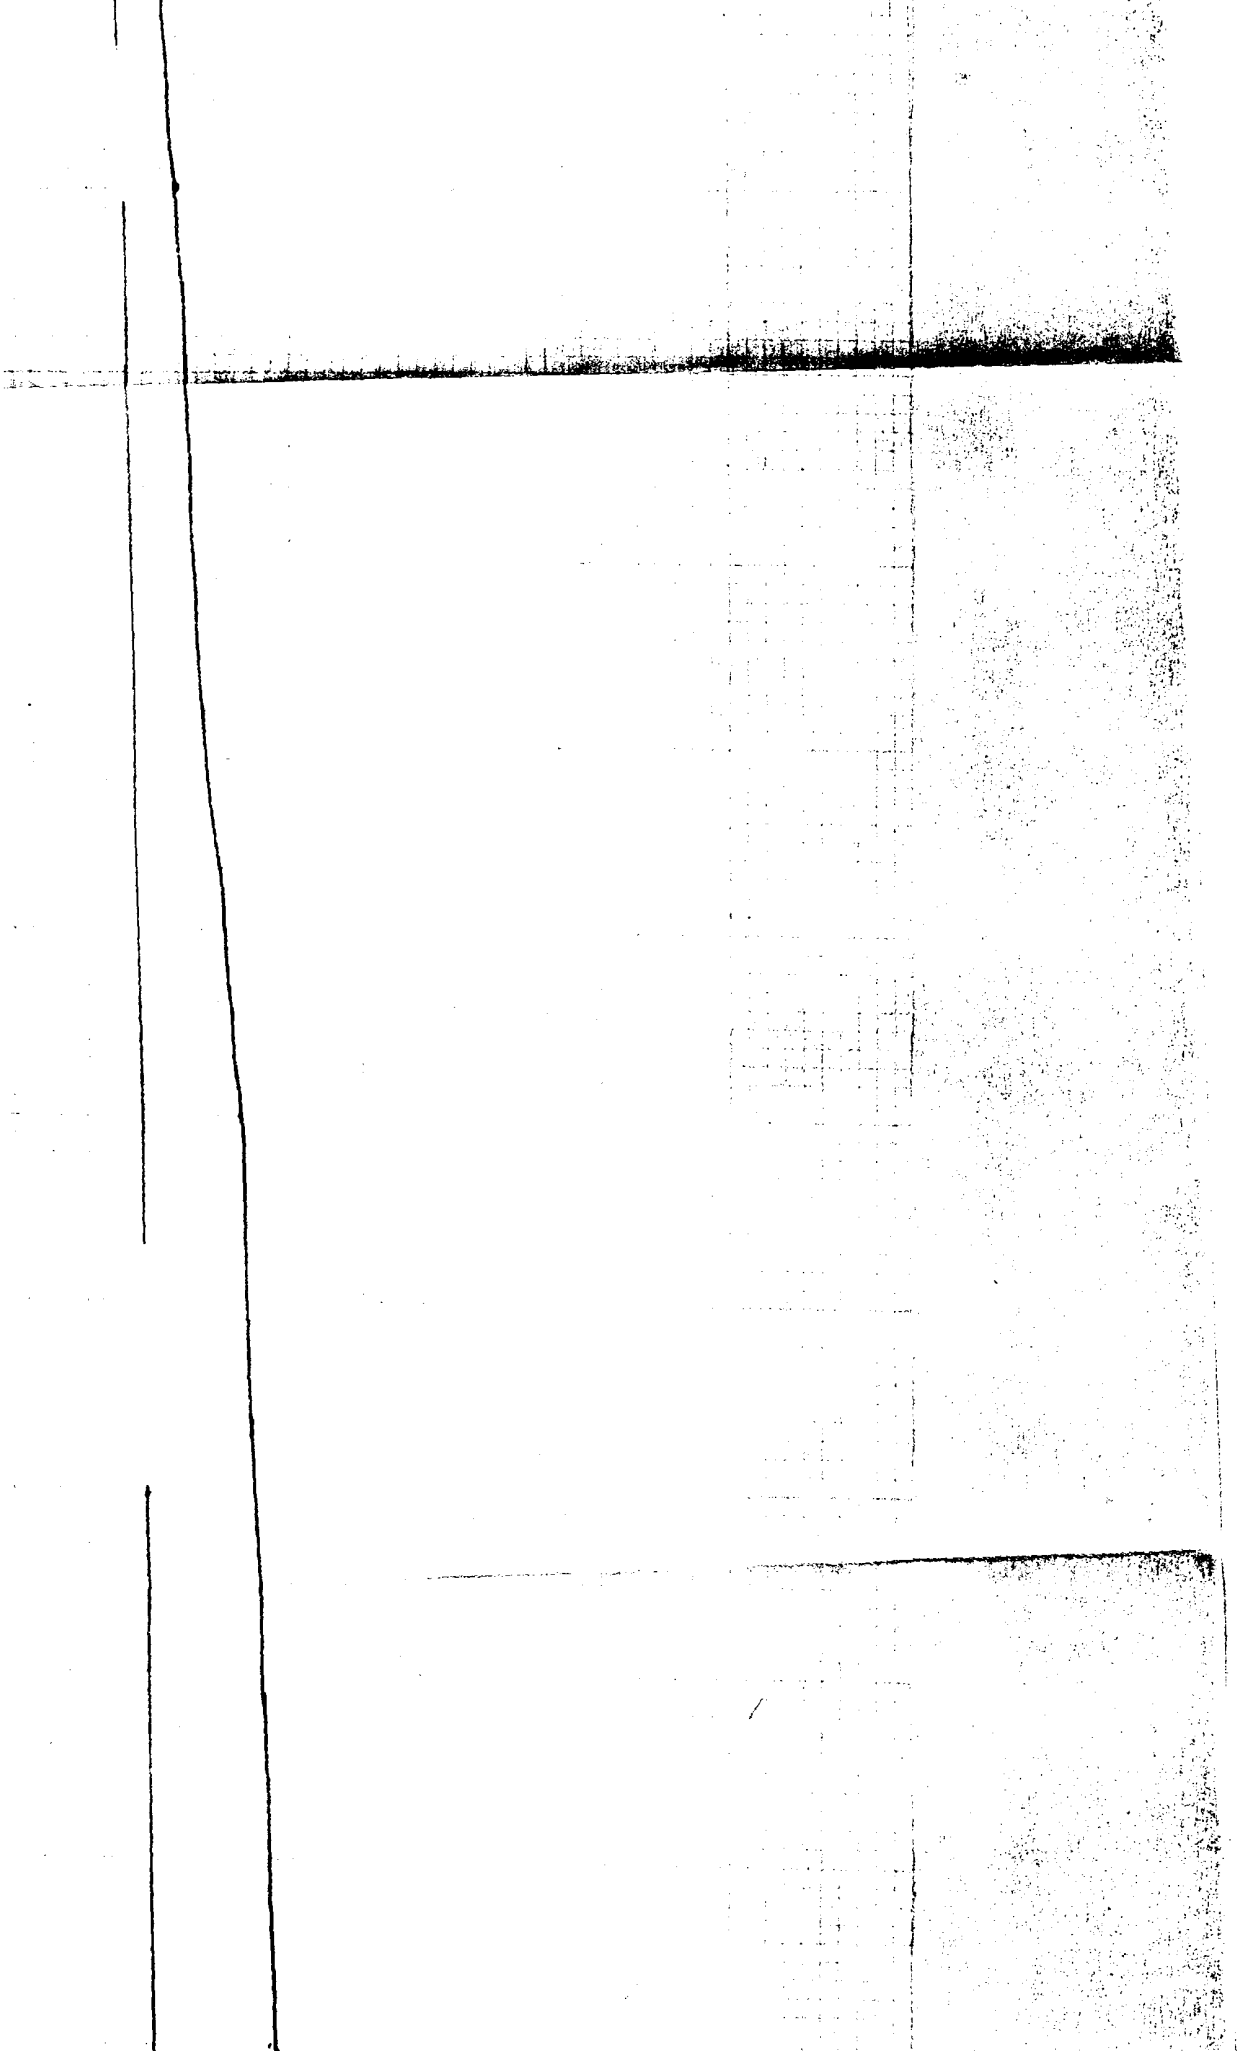

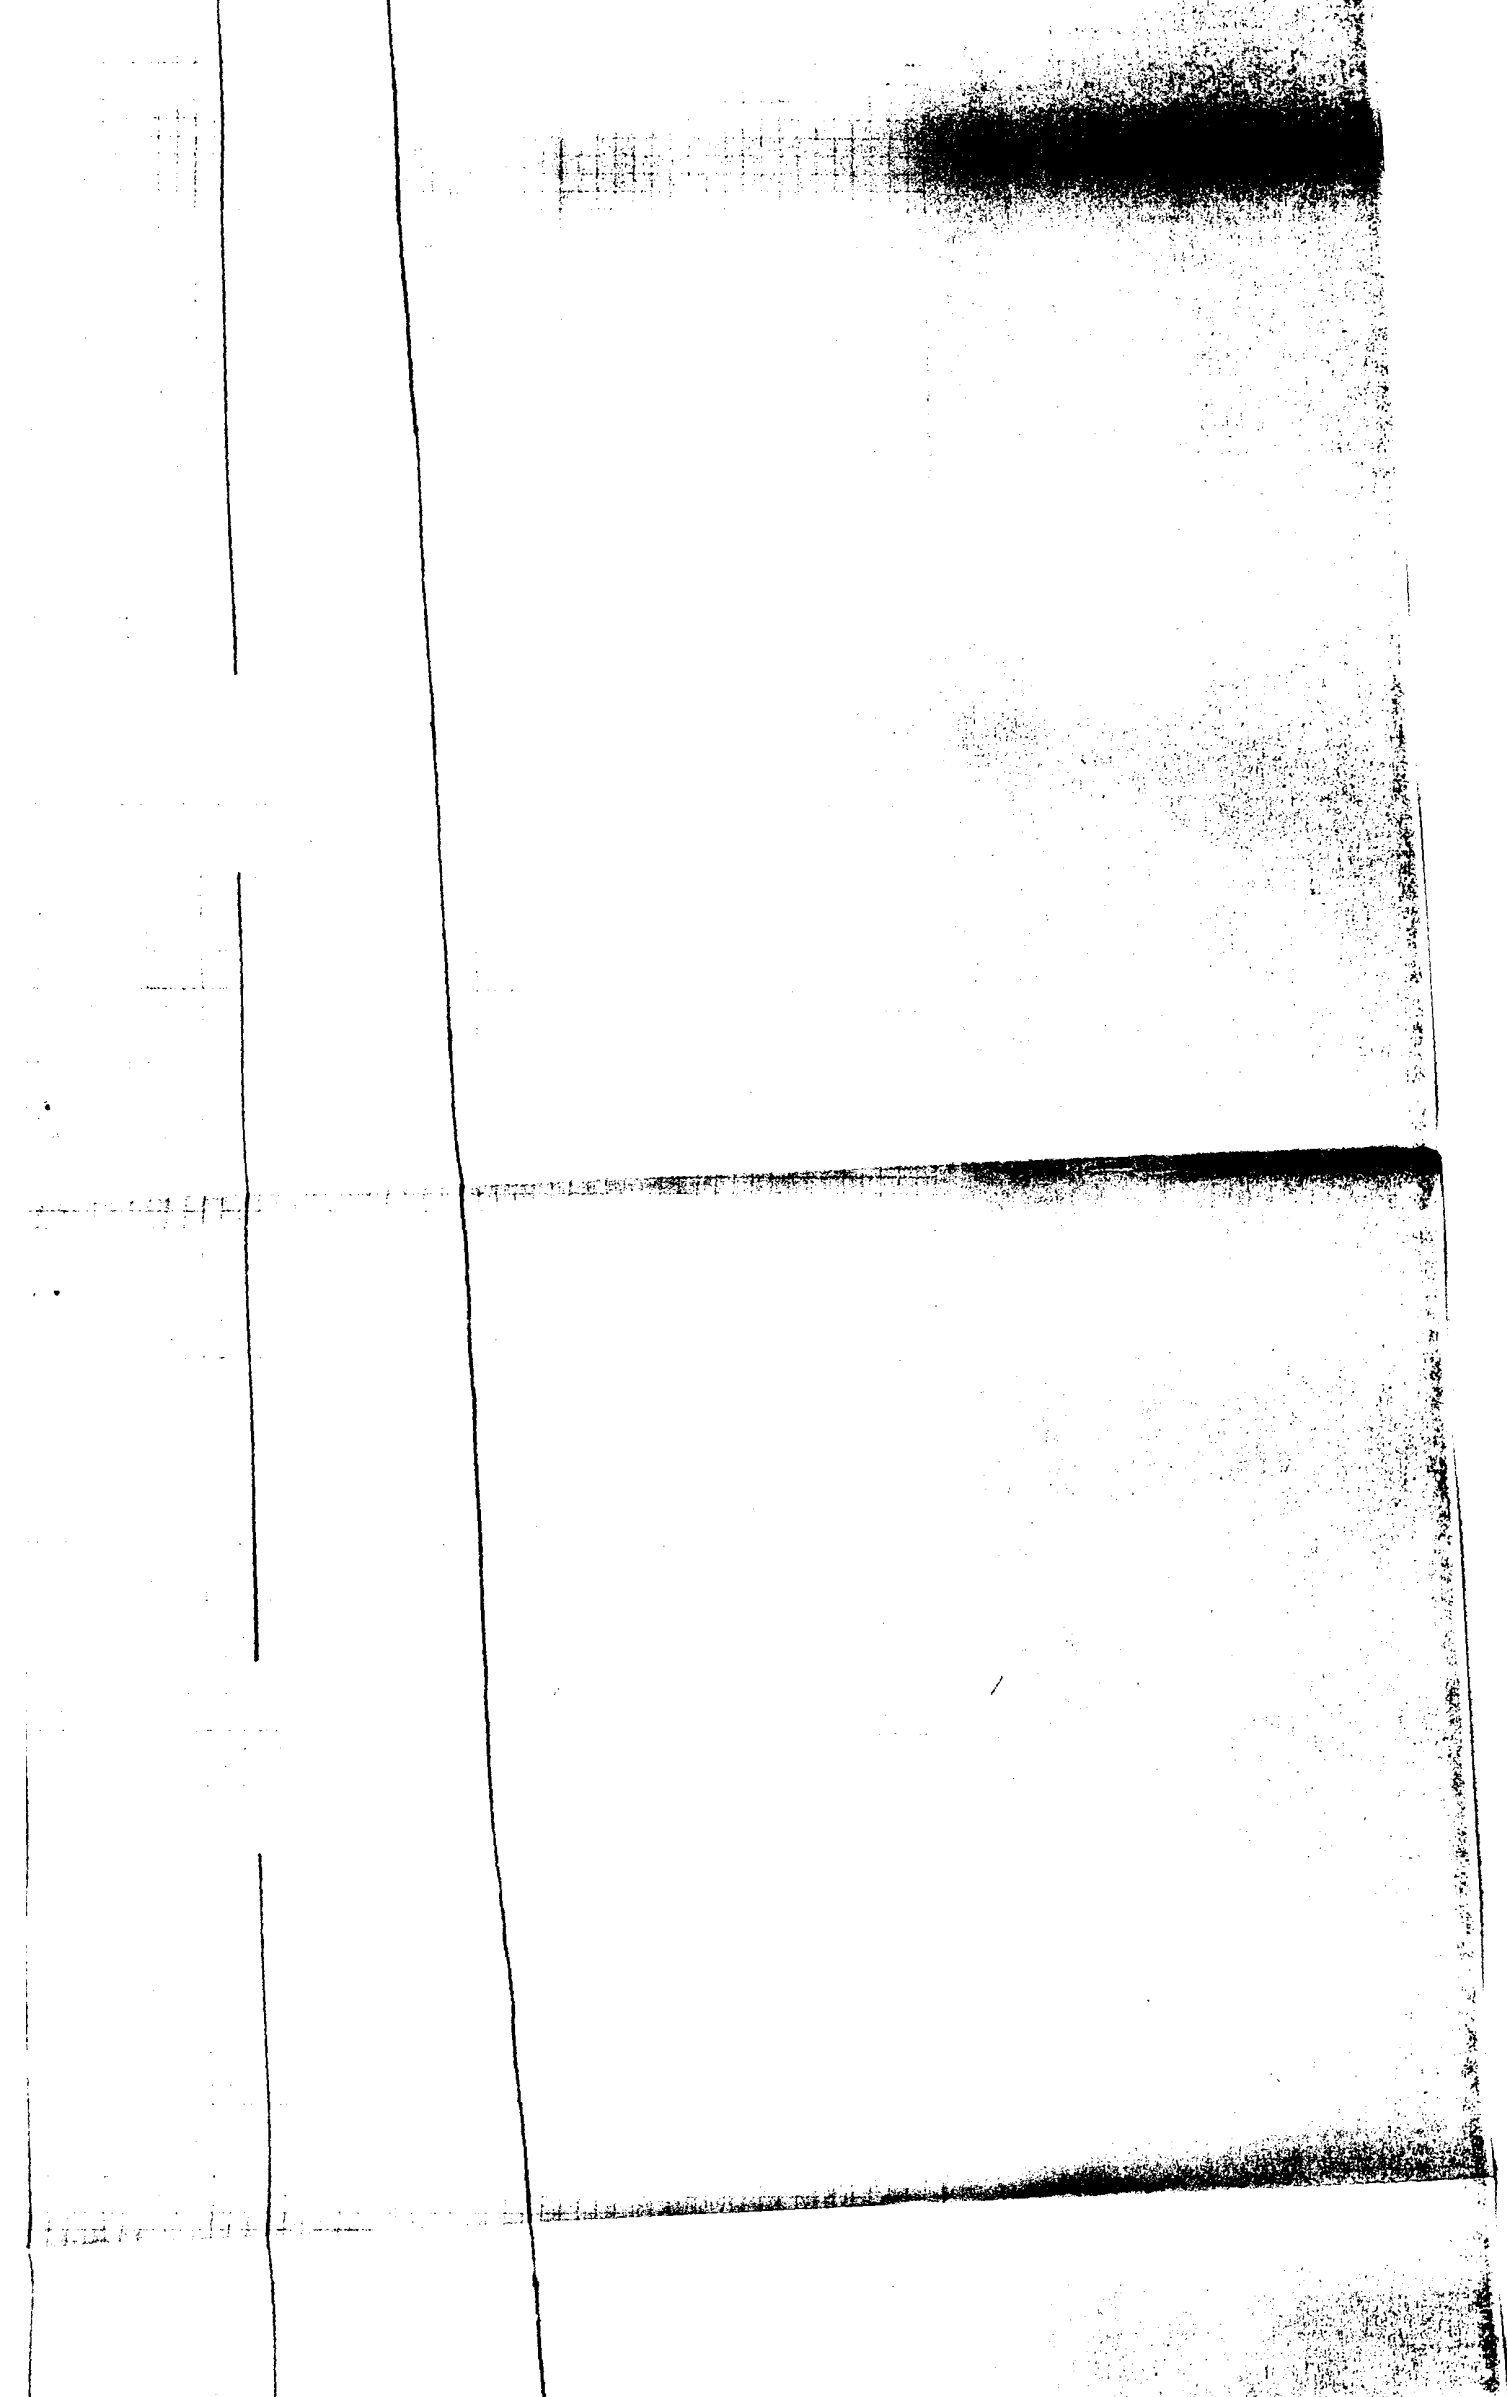

TD Surveyed at 7220'