

Submit 1 Copy To Appropriate District Office

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised July 18, 2013

WELL API NO. 30-005-29219
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. 321511
7. Lease Name or Unit Agreement Name Haley SAU
8. Well Number 1H
9. OGRID Number 164557
10. Pool name or Wildcat Chaveroo San Andres
11. Elevation (Show whether DR, RKB, RT, GR, etc.) RKB

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Ridgeway Arizona Oil Corp.

3. Address of Operator
1250 Wood Branch Park Drive, Suite 400, Houston, TX 77079

4. Well Location
Unit Letter P : 52 feet from the South line and 1130.6 feet from the East line
Section 34 Township 7S Range 33E NMPM County Roosevelt

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
RKB

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☒	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Move proposed surface location and proposed bottom hole location.

*SURFACE LOCATION CHANGING
COUNTIES. WILL CANCEL THIS
API# OPERATOR WILL SUBMIT
NEW APD*

Spud Date:

anticipated 11-28-18

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Clayton Riddle

TITLE Vice President, Development

DATE 11-12-18

Type or print name Clayton Riddle

E-mail address: criddle@pedevco.com

PHONE: 713-574-7909

For State Use Only

APPROVED BY:

Denied

TITLE

DATE

Conditions of Approval (if any):

OPERATOR TO SUBMIT NEW APD

0' 1000' 2000' 3000' 4000'


SCALE: 1" = 2000'

WO Num.: 34122


**SECTION 34, TOWNSHIP 7 SOUTH, RANGE 33 EAST, N.M.P.M.,
ROOSEVELT COUNTY, NEW MEXICO.**

**RIDGEWAY ARIZONA OIL CORP
HALEY SAU 1H
ELEV. - 4375'**

Lat - N 33.657097°
Long - W 103.548365°
NMSPCE- N 967524.9
E 780193.7
(NAD-83)

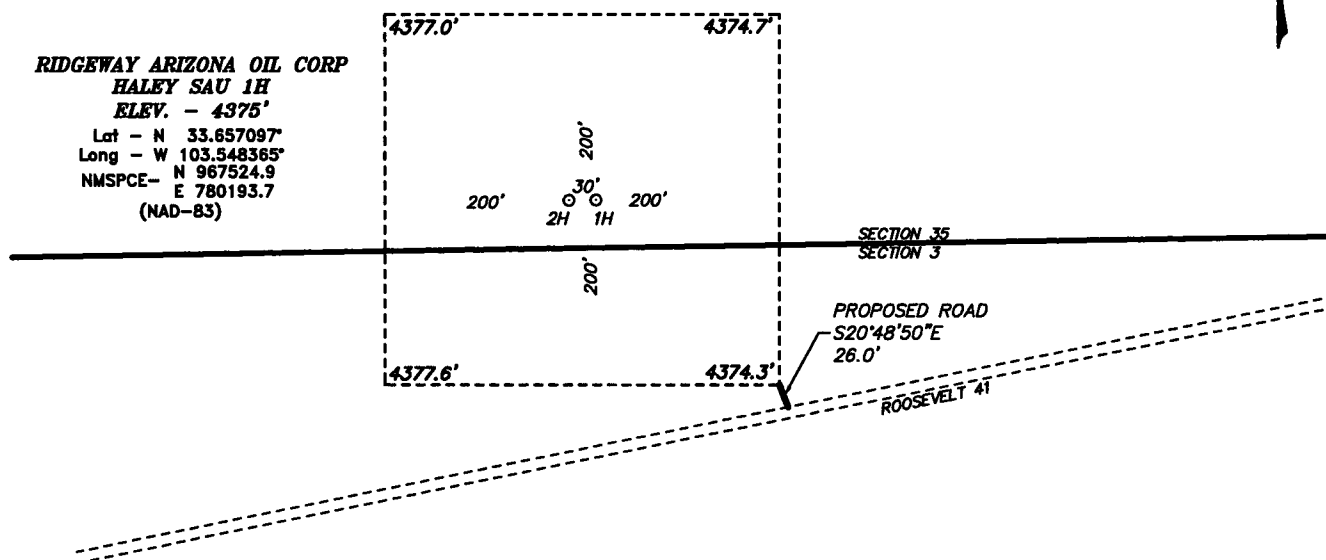

MILNESAND, NM IS ±12 MILES TO THE SOUTHEAST OF LOCATION.



RIDGEWAY ARIZONA OIL CORP.



REF: HALEY SAU 1H / WELL PAD TOPO

THE HALEY SAU 1H LOCATED 52' FROM
THE SOUTH LINE AND 1130.6' FROM THE EAST LINE OF
SECTION 34, TOWNSHIP 7 SOUTH, RANGE 33 EAST,
N.M.P.M., ROOSEVELT COUNTY, NEW MEXICO.

**basin
surveys**
focused on excellence
in the oilfield

P.O. Box 1786 (575) 393-7316 - Office
1120 N. West County Rd. (575) 392-2206 - Fax
Hobbs, New Mexico 88241 basin surveys.com

**SECTION 34, TOWNSHIP 7 SOUTH, RANGE 33 EAST, N.M.P.M.,
ROOSEVELT COUNTY, NEW MEXICO.**

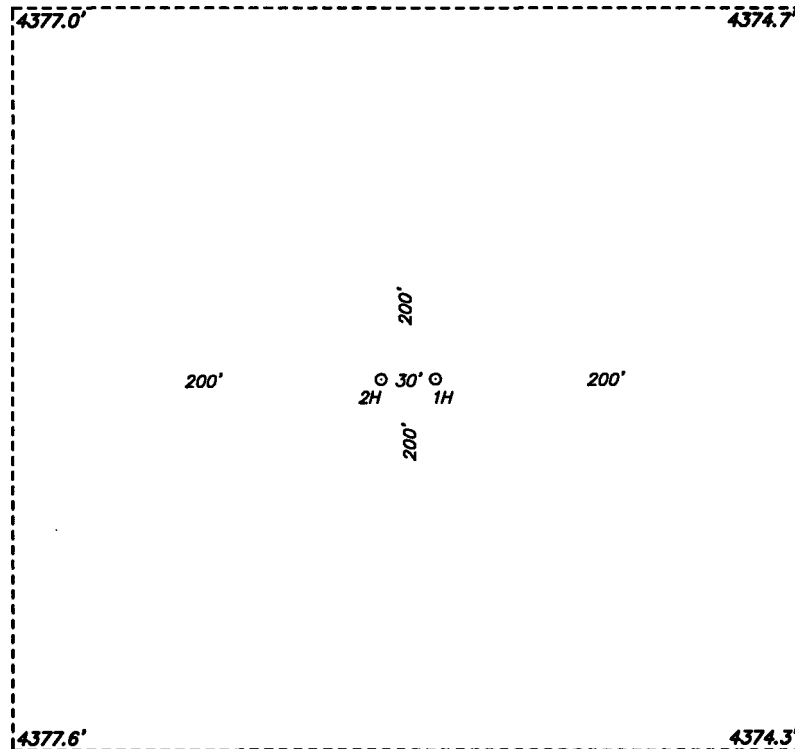

RIDGEWAY ARIZONA OIL CORP.


REF: HALEY SAU 1H / WELL PAD TOPO

THE HALEY SAU 1H LOCATED 52' FROM
THE SOUTH LINE AND 1130.6' FROM THE EAST LINE OF
SECTION 34, TOWNSHIP 7 SOUTH, RANGE 33 EAST,
N.M.P.M., ROOSEVELT COUNTY, NEW MEXICO.

basin
surveys
focused on excellence
in the oilfield

P.O. Box 1786 (575) 393-7316 - Office
1120 N. West County Rd. (575) 392-2206 - Fax
Hobbs, New Mexico 88241 basin-surveys.com

W.O. Number: 34122 Drawn By: J GOAD Date: 10-18-2018 Survey Date: 10-10-2018 Sheet 1 of 1 Sheets

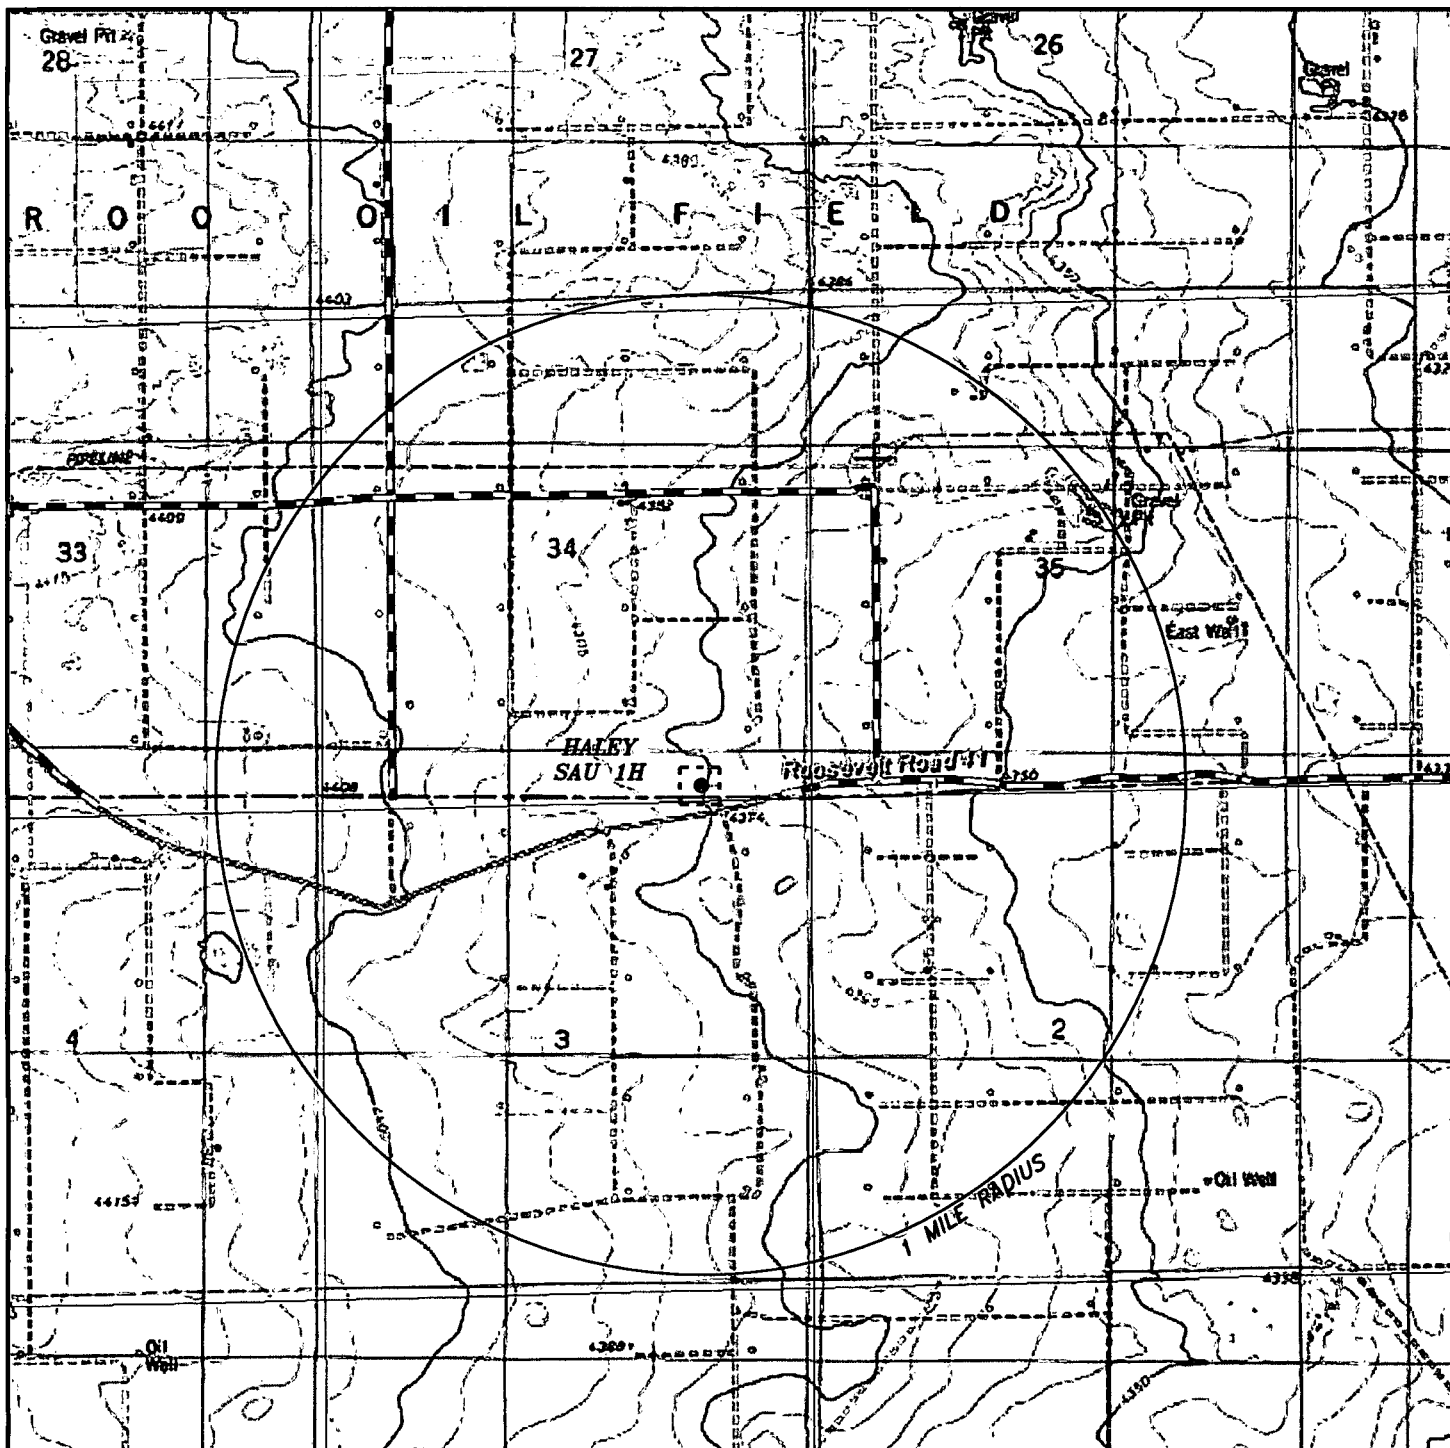

HALEY SAU 1H

Located 52' FSL and 1130.6' FEL
 Section 34, Township 7 South, Range 33 East,
 N.M.P.M., Roosevelt County, New Mexico.

basin
surveys

focused on excellence
 in the oilfield

P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (575) 393-7316 - Office
 (575) 392-2206 - Fax
 basin-surveys.com

0' 1000' 2000' 3000' 4000'


SCALE: 1" = 2000'

W.O. Number: JG 34122

Survey Date: 10-10-2018

YELLOW TINT - USA LAND
 BLUE TINT - STATE LAND
 NATURAL COLOR - FEE LAND

RIDGEWAY
ARIZONA OIL
CORP.

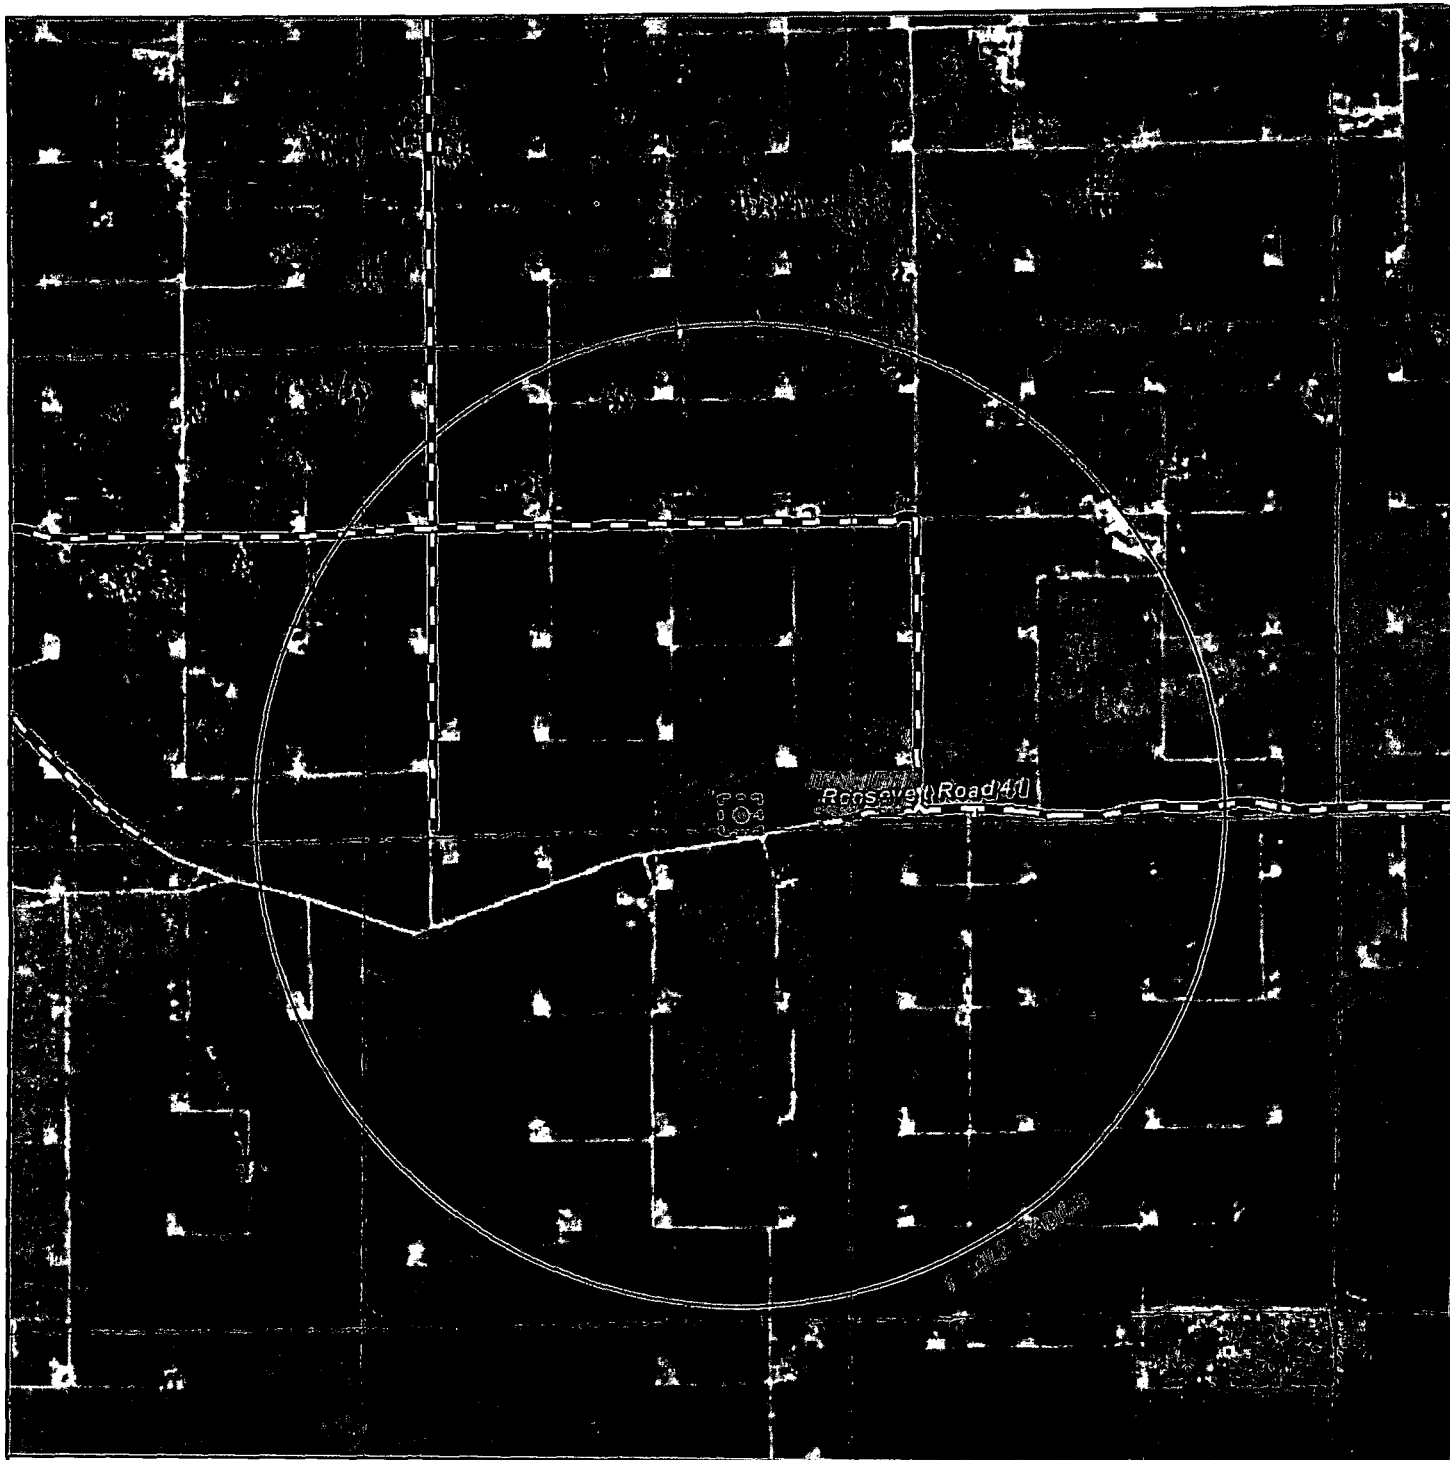

HALEY SAU 1H
 Located 52' FSL and 1130.6' FEL
 Section 34, Township 7 South, Range 33 East,
 N.M.P.M., Roosevelt County, New Mexico.



basin
surveys
 focused on excellence
 in the oilfield

P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (575) 393-7316 - Office
 (575) 392-2206 - Fax
 basin-surveys.com

0' 1000' 2000' 3000' 4000'
 SCALE: 1" = 2000'
 W.O. Number: JG 34122
 Survey Date: 10-10-2018
 YELLOW TINT - USA LAND
 BLUE TINT - STATE LAND
 NATURAL COLOR - FEE LAND

RIDGEWAY
ARIZONA OIL
CORP.

**SECTION 34, TOWNSHIP 7 SOUTH, RANGE 33 EAST, N.M.P.M.,
ROOSEVELT COUNTY, NEW MEXICO.**

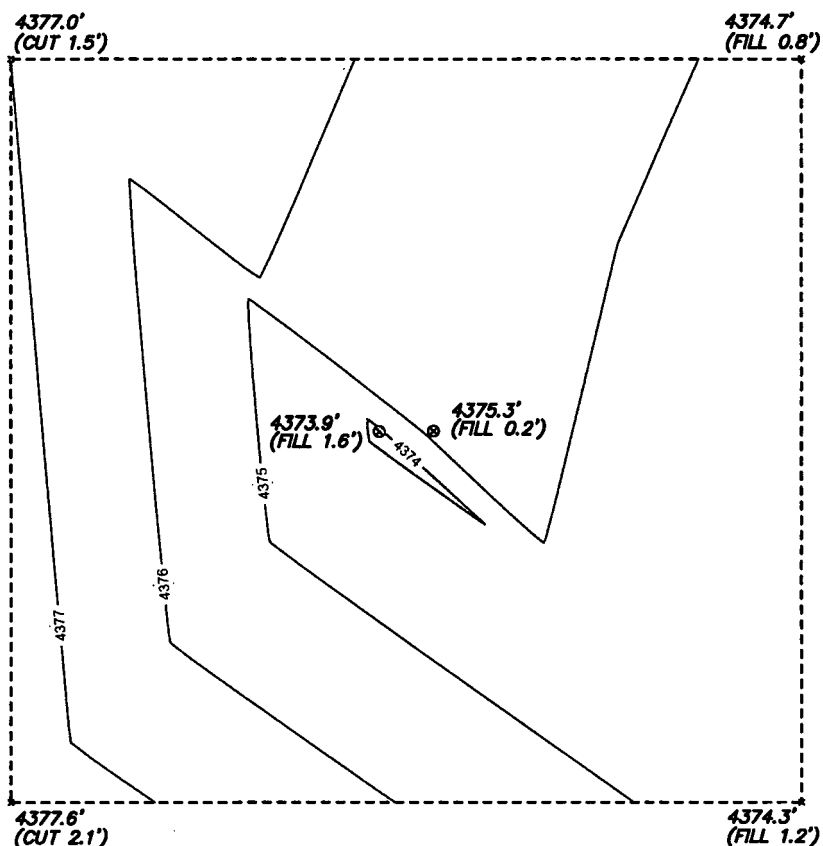

RIDGEWAY ARIZONA OIL CORP.

REF: HALEY SAU 1H / CUT & FILL

THE HALEY SAU 1H LOCATED 52' FROM
THE SOUTH LINE AND 1130.6' FROM THE EAST LINE OF
SECTION 34, TOWNSHIP 7 SOUTH, RANGE 33 EAST,
N.M.P.M., ROOSEVELT COUNTY, NEW MEXICO.

**basin
surveys**
focused on excellence
in the oilfield

P.O. Box 1786 (575) 393-7316 - Office
1120 N. West County Rd. (575) 392-2206 - Fax
Hobbs, New Mexico 88241 basin-surveys.com

W.O. Number: 34122	Drawn By: J GOAD	Date: 10-18-2018	Survey Date: 10-10-2018	Sheet 1 of 1 Sheets
--------------------	------------------	------------------	-------------------------	---------------------



TITAN
Directional Drilling

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	
3	966.67	10.00	179.56	963.29	-58.03	0.45	1.50	179.56	-58.03	
4	3463.25	10.00	179.56	3421.94	-491.54	3.79	0.00	0.00	-491.56	
5	4241.03	60.00	359.56	4083.82	-182.91	1.41	9.00	-180.00	-182.92	
6	4491.03	60.00	359.56	4208.82	33.59	-0.26	0.00	0.00	33.59	
7	4810.71	90.37	359.56	4289.61	339.03	-2.61	9.50	0.00	339.04	
8	9581.56	90.37	359.56	4258.83	5109.63	-39.40	0.00	0.00	5109.78	

Titan Directional Drilling

Survey Report

Company:	Ridgeway Arizona Oil Corp.	Local Co-ordinate Reference:	Well HSAU #1H
Project:	Permian NM E'83	TVD Reference:	GL+KB @ 4391.00usft (planning)
Site:	Haley SAU 1-2 Pad	MD Reference:	GL+KB @ 4391.00usft (planning)
Well:	HSAU #1H	North Reference:	Grid
Wellbore:	#1H OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1a	Database:	EDM 5k-14

Project	Permian NM E'83		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		Using geodetic scale factor

Site	Haley SAU 1-2 Pad, Centered on Haley SAU #1H		
Site Position:		Northing:	967,524.90 usft
From:	Map	Easting:	780,193.70 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	33° 39' 25.549 N
		Longitude:	103° 32' 54.113 W
		Grid Convergence:	0.44 °

Well	HSAU #1H		
Well Position	+N/-S	0.00 usft	Northing: 967,524.90 usft
	+E/-W	0.00 usft	Easting: 780,193.70 usft
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft
		Latitude:	33° 39' 25.549 N
		Longitude:	103° 32' 54.113 W
		Ground Level:	4,375.00 usft

Wellbore	#1H OH		
Magnetics	Model Name	Sample Date	Declination (°)
	IGRF2015	01/15/19	6.88
			Dip Angle (°)
			61.34
			Field Strength (nT)
			48,613.00800626

Design	Plan #1a		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth: 0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)
	0.00	0.00	0.00
			Direction (°)
			359.56

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	1.50	179.56	399.99	-1.31	0.01	-1.31	1.50	1.50	0.00
500.00	3.00	179.56	499.91	-5.23	0.04	-5.23	1.50	1.50	0.00
600.00	4.50	179.56	599.69	-11.77	0.09	-11.77	1.50	1.50	0.00
700.00	6.00	179.56	699.27	-20.92	0.16	-20.92	1.50	1.50	0.00
800.00	7.50	179.56	798.57	-32.68	0.25	-32.68	1.50	1.50	0.00
900.00	9.00	179.56	897.54	-47.03	0.36	-47.03	1.50	1.50	0.00
966.67	10.00	179.56	963.29	-58.03	0.45	-58.03	1.50	1.50	0.00
1,000.00	10.00	179.56	996.11	-63.82	0.49	-63.82	0.00	0.00	0.00
1,100.00	10.00	179.56	1,094.59	-81.18	0.63	-81.18	0.00	0.00	0.00
1,200.00	10.00	179.56	1,193.08	-98.55	0.76	-98.55	0.00	0.00	0.00
1,300.00	10.00	179.56	1,291.56	-115.91	0.89	-115.91	0.00	0.00	0.00
1,400.00	10.00	179.56	1,390.04	-133.27	1.03	-133.28	0.00	0.00	0.00
1,500.00	10.00	179.56	1,488.52	-150.64	1.16	-150.64	0.00	0.00	0.00

Titan Directional Drilling

Survey Report

Company:	Ridgeway Arizona Oil Corp.	Local Co-ordinate Reference:	Well HSAU #1H
Project:	Permian NM E'83	TVD Reference:	GL+KB @ 4391.00usft (planning)
Site:	Haley SAU 1-2 Pad	MD Reference:	GL+KB @ 4391.00usft (planning)
Well:	HSAU #1H	North Reference:	Grid
Wellbore:	#1H OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1a	Database:	EDM 5k-14

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
1,600.00	10.00	179.56	1,587.00	-168.00	1.30	-168.01	0.00	0.00	0.00
1,700.00	10.00	179.56	1,685.48	-185.37	1.43	-185.37	0.00	0.00	0.00
1,800.00	10.00	179.56	1,783.96	-202.73	1.56	-202.74	0.00	0.00	0.00
1,900.00	10.00	179.56	1,882.44	-220.10	1.70	-220.10	0.00	0.00	0.00
2,000.00	10.00	179.56	1,980.92	-237.46	1.83	-237.47	0.00	0.00	0.00
2,019.37	10.00	179.56	2,000.00	-240.82	1.86	-240.83	0.00	0.00	0.00
9 5/8"									
2,100.00	10.00	179.56	2,079.40	-254.82	1.96	-254.83	0.00	0.00	0.00
2,200.00	10.00	179.56	2,177.88	-272.19	2.10	-272.20	0.00	0.00	0.00
2,300.00	10.00	179.56	2,276.36	-289.55	2.23	-289.56	0.00	0.00	0.00
2,400.00	10.00	179.56	2,374.85	-306.92	2.37	-306.93	0.00	0.00	0.00
2,500.00	10.00	179.56	2,473.33	-324.28	2.50	-324.29	0.00	0.00	0.00
2,600.00	10.00	179.56	2,571.81	-341.65	2.63	-341.66	0.00	0.00	0.00
2,700.00	10.00	179.56	2,670.29	-359.01	2.77	-359.02	0.00	0.00	0.00
2,800.00	10.00	179.56	2,768.77	-376.37	2.90	-376.39	0.00	0.00	0.00
2,900.00	10.00	179.56	2,867.25	-393.74	3.04	-393.75	0.00	0.00	0.00
3,000.00	10.00	179.56	2,965.73	-411.10	3.17	-411.11	0.00	0.00	0.00
3,100.00	10.00	179.56	3,064.21	-428.47	3.30	-428.48	0.00	0.00	0.00
3,200.00	10.00	179.56	3,162.69	-445.83	3.44	-445.84	0.00	0.00	0.00
3,300.00	10.00	179.56	3,261.17	-463.20	3.57	-463.21	0.00	0.00	0.00
3,400.00	10.00	179.56	3,359.65	-480.56	3.71	-480.57	0.00	0.00	0.00
3,463.25	10.00	179.56	3,421.94	-491.54	3.79	-491.56	0.00	0.00	0.00
3,500.00	6.69	179.56	3,458.30	-496.88	3.83	-496.89	9.00	-9.00	0.00
3,550.00	2.19	179.56	3,508.13	-500.75	3.86	-500.76	9.00	-9.00	0.00
3,600.00	2.31	359.56	3,558.12	-500.70	3.86	-500.71	9.00	0.23	-360.00
3,650.00	6.81	359.56	3,607.95	-496.73	3.83	-496.74	9.00	9.00	0.00
3,700.00	11.31	359.56	3,657.31	-488.86	3.77	-488.87	9.00	9.00	0.00
3,750.00	15.81	359.56	3,705.91	-477.14	3.68	-477.15	9.00	9.00	0.00
3,800.00	20.31	359.56	3,753.43	-461.65	3.56	-461.66	9.00	9.00	0.00
3,850.00	24.81	359.56	3,799.60	-442.47	3.41	-442.48	9.00	9.00	0.00
3,900.00	29.31	359.56	3,844.11	-419.73	3.24	-419.75	9.00	9.00	0.00
3,950.00	33.81	359.56	3,886.71	-393.57	3.03	-393.59	9.00	9.00	0.00
4,000.00	38.31	359.56	3,927.12	-364.15	2.81	-364.16	9.00	9.00	0.00
4,050.00	42.81	359.56	3,965.10	-331.65	2.56	-331.66	9.00	9.00	0.00
4,100.00	47.31	359.56	4,000.41	-296.27	2.28	-296.28	9.00	9.00	0.00
4,150.00	51.81	359.56	4,032.83	-258.23	1.99	-258.24	9.00	9.00	0.00
4,200.00	56.31	359.56	4,062.18	-217.76	1.68	-217.77	9.00	9.00	0.00
4,241.03	60.00	359.56	4,083.82	-182.91	1.41	-182.92	9.00	9.00	0.00
4,300.00	60.00	359.56	4,113.31	-131.85	1.02	-131.85	0.00	0.00	0.00
4,400.00	60.00	359.56	4,163.31	-45.25	0.35	-45.25	0.00	0.00	0.00
4,491.03	60.00	359.56	4,208.82	33.59	-0.26	33.59	0.00	0.00	0.00
4,500.00	60.85	359.56	4,213.25	41.39	-0.32	41.39	9.50	9.50	0.00
4,550.00	65.60	359.56	4,235.76	86.01	-0.66	86.02	9.50	9.50	0.00
4,600.00	70.35	359.56	4,254.51	132.35	-1.02	132.35	9.50	9.50	0.00

Titan Directional Drilling

Survey Report

Company:	Ridgeway Arizona Oil Corp.	Local Co-ordinate Reference:	Well HSAU #1H
Project:	Permian NM E'83	TVD Reference:	GL+KB @ 4391.00usft (planning)
Site:	Haley SAU 1-2 Pad	MD Reference:	GL+KB @ 4391.00usft (planning)
Well:	HSAU #1H	North Reference:	Grid
Wellbore:	#1H OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1a	Database:	EDM 5k-14

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,650.00	75.10	359.56	4,269.35	180.08	-1.39	180.09	9.50	9.50	0.00
4,700.00	79.85	359.56	4,280.19	228.88	-1.76	228.88	9.50	9.50	0.00
4,750.00	84.60	359.56	4,286.95	278.40	-2.15	278.41	9.50	9.50	0.00
4,800.00	89.35	359.56	4,289.58	328.31	-2.53	328.32	9.50	9.50	0.00
4,810.71	90.37	359.56	4,289.61	339.03	-2.61	339.04	9.50	9.50	0.00
4,900.00	90.37	359.56	4,289.03	428.31	-3.30	428.32	0.00	0.00	0.00
5,000.00	90.37	359.56	4,288.39	528.30	-4.07	528.32	0.00	0.00	0.00
5,100.00	90.37	359.56	4,287.74	628.30	-4.84	628.32	0.00	0.00	0.00
5,200.00	90.37	359.56	4,287.10	728.29	-5.62	728.32	0.00	0.00	0.00
5,300.00	90.37	359.56	4,286.45	828.29	-6.39	828.31	0.00	0.00	0.00
5,400.00	90.37	359.56	4,285.81	928.28	-7.16	928.31	0.00	0.00	0.00
5,500.00	90.37	359.56	4,285.16	1,028.28	-7.93	1,028.31	0.00	0.00	0.00
5,600.00	90.37	359.56	4,284.52	1,128.27	-8.70	1,128.31	0.00	0.00	0.00
5,700.00	90.37	359.56	4,283.87	1,228.27	-9.47	1,228.31	0.00	0.00	0.00
5,800.00	90.37	359.56	4,283.23	1,328.26	-10.24	1,328.30	0.00	0.00	0.00
5,900.00	90.37	359.56	4,282.58	1,428.26	-11.01	1,428.30	0.00	0.00	0.00
6,000.00	90.37	359.56	4,281.94	1,528.25	-11.78	1,528.30	0.00	0.00	0.00
6,100.00	90.37	359.56	4,281.29	1,628.25	-12.56	1,628.30	0.00	0.00	0.00
6,200.00	90.37	359.56	4,280.65	1,728.24	-13.33	1,728.30	0.00	0.00	0.00
6,300.00	90.37	359.56	4,280.00	1,828.24	-14.10	1,828.29	0.00	0.00	0.00
6,400.00	90.37	359.56	4,279.36	1,928.23	-14.87	1,928.29	0.00	0.00	0.00
6,500.00	90.37	359.56	4,278.71	2,028.23	-15.64	2,028.29	0.00	0.00	0.00
6,600.00	90.37	359.56	4,278.06	2,128.22	-16.41	2,128.29	0.00	0.00	0.00
6,700.00	90.37	359.56	4,277.42	2,228.22	-17.18	2,228.29	0.00	0.00	0.00
6,800.00	90.37	359.56	4,276.77	2,328.21	-17.95	2,328.28	0.00	0.00	0.00
6,900.00	90.37	359.56	4,276.13	2,428.21	-18.72	2,428.28	0.00	0.00	0.00
7,000.00	90.37	359.56	4,275.48	2,528.20	-19.50	2,528.28	0.00	0.00	0.00
7,100.00	90.37	359.56	4,274.84	2,628.20	-20.27	2,628.28	0.00	0.00	0.00
7,200.00	90.37	359.56	4,274.19	2,728.19	-21.04	2,728.27	0.00	0.00	0.00
7,300.00	90.37	359.56	4,273.55	2,828.19	-21.81	2,828.27	0.00	0.00	0.00
7,400.00	90.37	359.56	4,272.90	2,928.18	-22.58	2,928.27	0.00	0.00	0.00
7,500.00	90.37	359.56	4,272.26	3,028.18	-23.35	3,028.27	0.00	0.00	0.00
7,600.00	90.37	359.56	4,271.61	3,128.17	-24.12	3,128.27	0.00	0.00	0.00
7,700.00	90.37	359.56	4,270.97	3,228.17	-24.89	3,228.26	0.00	0.00	0.00
7,800.00	90.37	359.56	4,270.32	3,328.16	-25.66	3,328.26	0.00	0.00	0.00
7,900.00	90.37	359.56	4,269.68	3,428.16	-26.43	3,428.26	0.00	0.00	0.00
8,000.00	90.37	359.56	4,269.03	3,528.15	-27.21	3,528.26	0.00	0.00	0.00
8,100.00	90.37	359.56	4,268.39	3,628.15	-27.98	3,628.26	0.00	0.00	0.00
8,200.00	90.37	359.56	4,267.74	3,728.14	-28.75	3,728.25	0.00	0.00	0.00
8,300.00	90.37	359.56	4,267.10	3,828.14	-29.52	3,828.25	0.00	0.00	0.00
8,400.00	90.37	359.56	4,266.45	3,928.13	-30.29	3,928.25	0.00	0.00	0.00
8,500.00	90.37	359.56	4,265.80	4,028.13	-31.06	4,028.25	0.00	0.00	0.00
8,600.00	90.37	359.56	4,265.16	4,128.12	-31.83	4,128.25	0.00	0.00	0.00

Titan Directional Drilling

Survey Report

Company:	Ridgeway Arizona Oil Corp.	Local Co-ordinate Reference:	Well HSAU #1H
Project:	Permian NM E'83	TVD Reference:	GL+KB @ 4391.00usft (planning)
Site:	Haley SAU 1-2 Pad	MD Reference:	GL+KB @ 4391.00usft (planning)
Well:	HSAU #1H	North Reference:	Grid
Wellbore:	#1H OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1a	Database:	EDM 5k-14

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,700.00	90.37	359.56	4,264.51	4,228.12	-32.60	4,228.24	0.00	0.00	0.00
8,800.00	90.37	359.56	4,263.87	4,328.11	-33.37	4,328.24	0.00	0.00	0.00
8,900.00	90.37	359.56	4,263.22	4,428.11	-34.15	4,428.24	0.00	0.00	0.00
9,000.00	90.37	359.56	4,262.58	4,528.10	-34.92	4,528.24	0.00	0.00	0.00
9,100.00	90.37	359.56	4,261.93	4,628.10	-35.69	4,628.24	0.00	0.00	0.00
9,200.00	90.37	359.56	4,261.29	4,728.09	-36.46	4,728.23	0.00	0.00	0.00
9,300.00	90.37	359.56	4,260.64	4,828.09	-37.23	4,828.23	0.00	0.00	0.00
9,400.00	90.37	359.56	4,260.00	4,928.08	-38.00	4,928.23	0.00	0.00	0.00
9,500.00	90.37	359.56	4,259.35	5,028.08	-38.77	5,028.23	0.00	0.00	0.00
9,581.56	90.37	359.56	4,258.83	5,109.63	-39.40	5,109.78	0.00	0.00	0.00

Casing Points				
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
2,019.37	2,000.00	9 5/8"	9-5/8	13-1/2