


NEW MEXICO OIL CONSERVATION COMMISSION

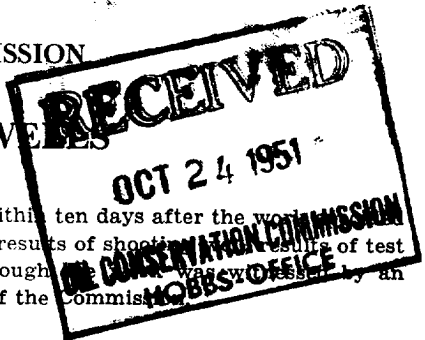

DUPLICATE MISCELLANEOUS REPORTS ON WELLS

Submit this report in triplicate to the Oil Conservation Commission District Office within ten days after the work is completed. It should be signed and filed as a report on beginning drilling operations, results of shooting, results of test of casing shut off, result of plugging of well, and other important operations, even though the well is not yet an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

Table with 4 rows and 2 columns for reporting categories: REPORT ON BEGINNING DRILLING OPERATIONS, REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL, REPORT ON RESULT OF TEST OF CASING SHUT-OFF, and REPORT ON RESULT OF PLUGGING OF WELL. The plugging report is checked with an 'X'.

October 20, 1951

Hobbs, New Mexico

Date

Place

Following is a report on the work done and the results obtained under the heading noted above at the

Tide Water Associated Oil Company, Grady Best, Well No. 1 in the SW NE of Sec. 27, T. 2-S, R. 29-E, N. M. P. M., Wildcat Pool, Lea Roosevelt County.

The dates of this work were as follows: October 17 - 20, 1951

Notice of intention to do the work was submitted on Form C-102 on October 10, 1951, and approval of the proposed plan was obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

The above described well has been plugged and abandoned as follows:

- (1) The hole circulated to total depth with 10#/gal. mud.
(2) Cement plug laid from 4556' - 4663'.
(3) Cement plug laid from 3050' - 3171'.
(4) A 5-1/2" OD liner hung at 2424' and set at 2880'.
(5) The section 2880' - 3050' tested 2 bbls. salt water per hour after a 1000 gallon treatment of mud acid.
(6) 9-5/8" OD casing was cut off at 725' and pulled.
(7) A cement plug laid from 505' - 552' in 12-1/4" hole.
(8) A 25' cement plug laid at surface in the 13-3/8" casing with a 4" OD marking extending 4' above the mean ground level.

Witnessed by H. E. Wendt, Tide Water Associated Oil Company, Engineer

APPROVED: OIL CONSERVATION COMMISSION

Signature of Gas Inspector, Date OCT 24 1951

I hereby swear or affirm that the information given above is true and correct.

Name H. P. Shackelford, Position District Foreman, Representing Tide Water Associated Oil Co., Address Box 547, Hobbs, New Mexico