

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104
Revised August 1, 2011

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address Burnett Oil Co. Inc. Burnett Plaza - Suite 1500 801 Cherry Street - Unit 9 Fort Worth, Texas 76102		² OGRID Number 03080
		³ Reason for Filing Code/ Effective Date NW/ 12/11/2020
⁴ API Number 30 - 01545953	⁵ Pool Name Cedar Lake Glorieta Yeso	⁶ Pool Code 96831
⁷ Property Code 20767	⁸ Property Name Jackson A	⁹ Well Number 61

II. ¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
O	13	17S	30E		990	South	2310	East	Eddy

II Bottom Hole Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
O	13	17S	30E		999	South	2315	East	Eddy
¹² Lse Code F	¹³ Producing Method Code P	¹⁴ Gas Connection Date 12/11/2020	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters


¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
015694	Holly Frontier Corporation/Navajo Refinery P.O. Box 159 Artesia, NM 88211	O
038785	DCP Midstream LLC 5718 Westheimer, Suite 2000 Houston, Texas 77057	G
221115	Frontier Field Services LLC 2002 Timberloch Place, Suite 110 The Woodlands, TX 77380	G

IV. Well Completion Data

²¹ Spud Date 10/14/2020	²² Ready Date 12/11/2020	²³ TD 6138'	²⁴ PBDT 6132'	²⁵ Perforations 4603-5952'	²⁶ DHC, MC
²⁷ Hole Size 12.5"	²⁸ Casing & Tubing Size 8.625"	²⁹ Depth Set 338'	³⁰ Sacks Cement 1170		
7.875"	5.5"	6134'	560		
	2.875"	4643'			

V. Well Test Data

³¹ Date New Oil 12/11/2020	³² Gas Delivery Date 12/11/2020	³³ Test Date 12/20/2020	³⁴ Test Length 24 Hours	³⁵ Tbg. Pressure 340	³⁶ Csg. Pressure 165
³⁷ Choke Size	³⁸ Oil 135	³⁹ Water 522	⁴⁰ Gas 172		⁴¹ Test Method P

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.		OIL CONSERVATION DIVISION	
Signature: 		Approved by: KURT SIMMONS	
Printed name: Leslie Garcia		Title: NMOCD	
Title: Regulatory & Government Affairs Manager		Approval Date: 02/19/2021	
E-mail Address: lgarcia@burnettoil.com			
Date: 01/26/2021	Phone: 817-583-8730		

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone (575) 393-8161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, NM 88210
Phone (575) 748-1283 Fax: (575) 748-0720

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone (505) 334-8178 Fax: (505) 334-8170

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-102
Revised August 14, 2011

Submit one copy to appropriate
District Office

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-015-45640	Pool Code 96831	Pool Name Cedar Lake Glorieta Yeso
Property Code 2388	Property Name GISSLER A	Well Number 52
OGRID No. 03080	Operator Name BURNETT OIL COMPANY, INC.	Elevation 3693

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	FEET from the	SOUTH/South line	FEET from the	East/EAST line	County
I	14	17 S	30 E		1650	SOUTH	1100	EAST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	FEET from the	SOUTH/South line	FEET from the	East/EAST line	County
I	14	17 S	30 E		1658	SOUTH	979	EAST	EDDY

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
20			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

N: 670171.4 E: 658706.0 (NAD 83)	N: 670181.8 E: 661346.6 (NAD 83)	N: 670192.3 E: 663987.3 (NAD 83)	OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>[Signature]</i> 12/27/20 Signature Date LESLIE GARVIS Printed Name LESLIE@burnettco.com Email Address
SURFACE LOCATION Lat - N 32.831772° Long - W 103.937570° NMSPE- N 666559.0 E 662899.3 (NAD-83)			
BOTTOM HOLE Lat - N 32.874744° Long - W 103.788822° NMSPE- N 682396.5 E 708508.5 (NAD-83)			SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. DECEMBER 06 2014 Date Surveyed Signature of Professional Surveyor 7977 Certificate No. Gary L. Jones 7977 BASIN SURVEYS 0' 500' 1000' 1500' 2000' SCALE: 1" = 1000' WO Num.: 31162
N: 664895.2 E: 658723.1 (NAD 83) N: 664913.1 E: 664004.5 (NAD 83)			





COMPANY: Burnett Oil Company
 WELL: Gissler A #52
 COUNTY: Eddy County, N.M. (NAD 83)
 DATUM: North American Datum 1983
 RIG: Ensign T436



OFFICE: 936.582.7296

GRID CORRECTION: To convert a Magnetic Direction to a Grid Direction, Add 6.69°
 True Correction; To convert a Magnetic Direction to a True Direction, Add 6.91° East

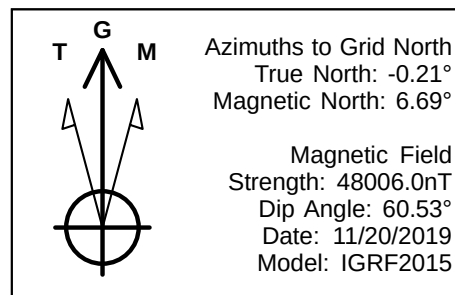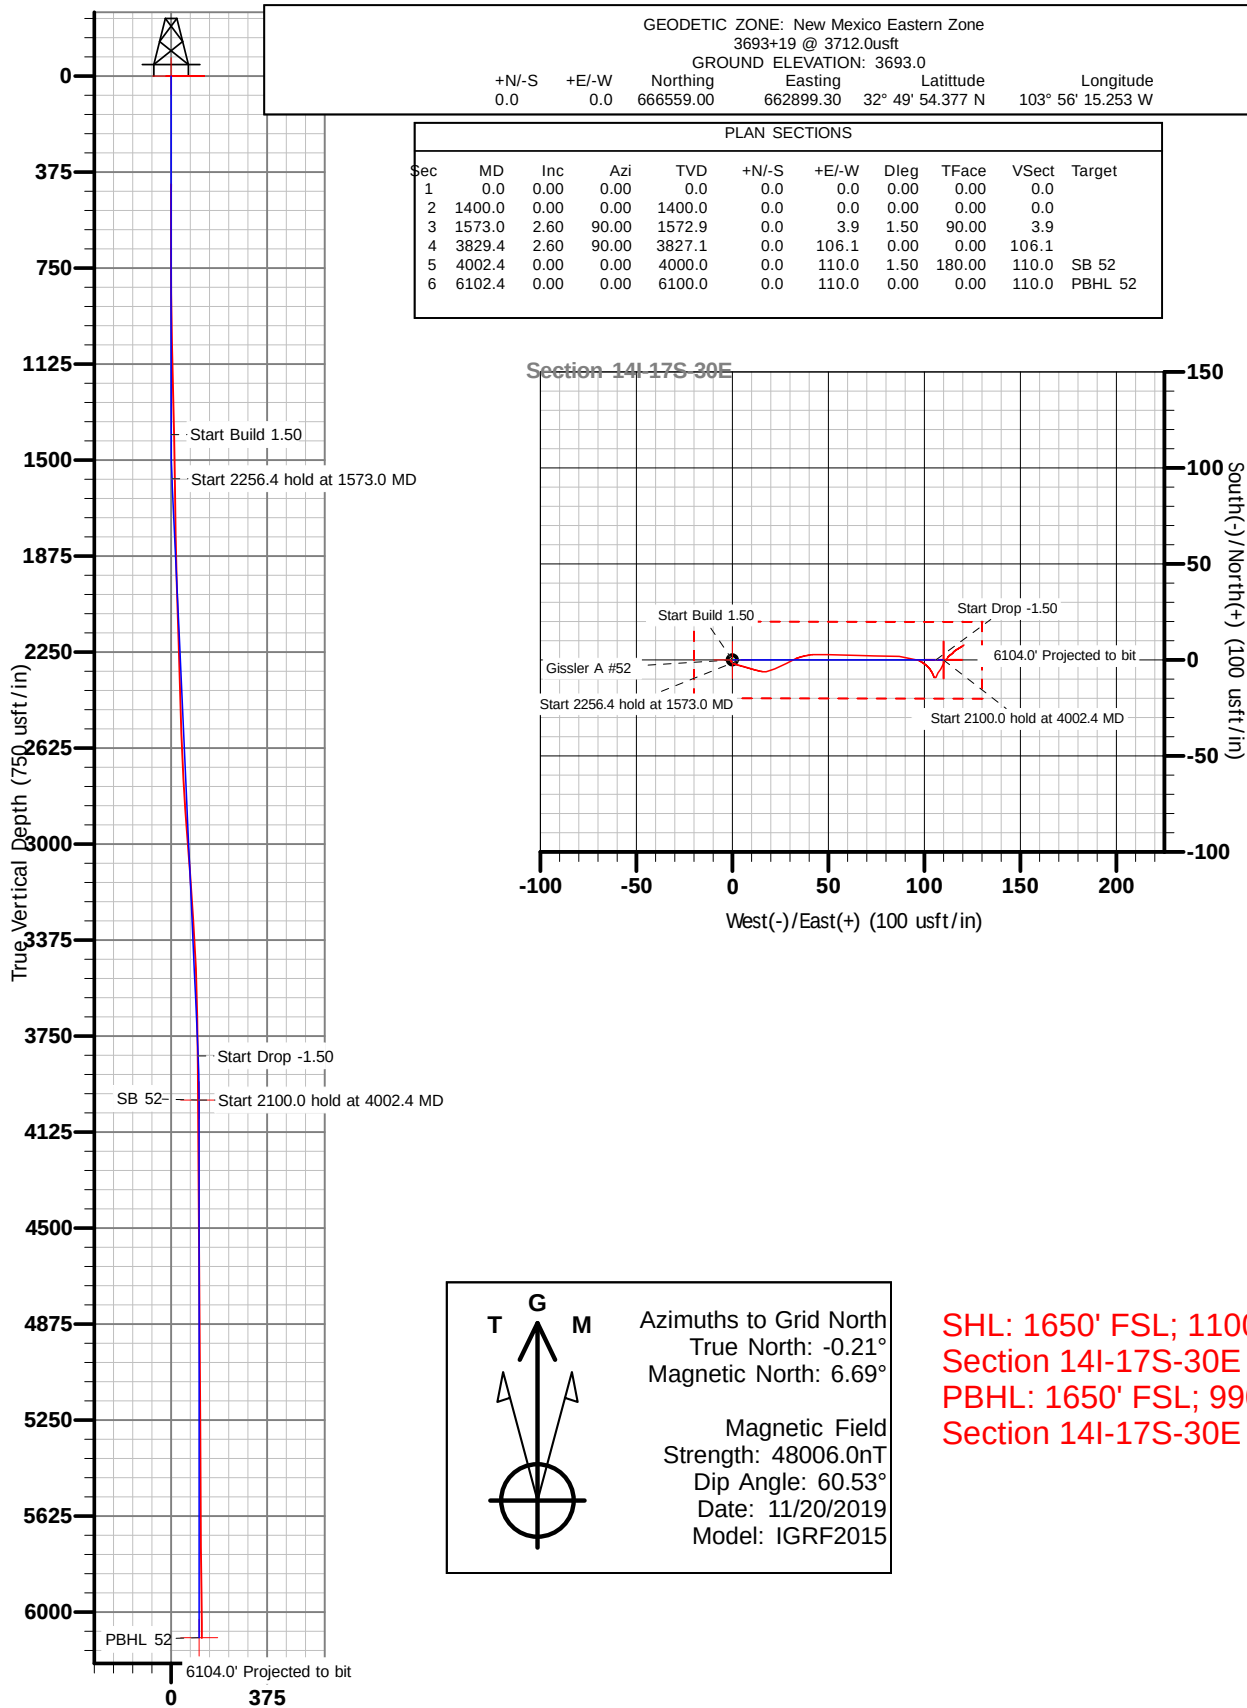

SHL: 1650' FSL; 1100' FEL
 Section 14I-17S-30E
 PBHL: 1650' FSL; 990' FEL
 Section 14I-17S-30E

Vertical Section at 90.00° (750 usft/in)

BURNETT OIL CO., INC.

Burnett Oil Company

Eddy County, N.M. (NAD 83)

Section 14I-17S-30E

Gissler A #52

Original Hole

Design: As Drilled

Standard Survey Report

28 February, 2020





Stryker Energy Directional Services

Survey Report



Company:	Burnett Oil Company	Local Co-ordinate Reference:	Site Section 14I-17S-30E
Project:	Eddy County, N.M. (NAD 83)	TVD Reference:	3693+19 @ 3712.0usft
Site:	Section 14I-17S-30E	MD Reference:	3693+19 @ 3712.0usft
Well:	Gissler A #52	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	As Drilled	Database:	EDM5000

Project	Eddy County, N.M. (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Section 14I-17S-30E		
Site Position:		Northing:	666,559.00 usft
From:	Map	Easting:	662,899.30 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 49' 54.377 N
		Longitude:	103° 56' 15.253 W
		Grid Convergence:	0.21 °

Well	Gissler A #52		
Well Position	+N/-S	0.0 usft	Northing: 666,559.00 usft
	+E/-W	0.0 usft	Easting: 662,899.30 usft
Position Uncertainty	0.0 usft	Wellhead Elevation:	19.0 usft
		Latitude:	32° 49' 54.377 N
		Longitude:	103° 56' 15.253 W
		Ground Level:	3,693.0 usft

Wellbore	Original Hole				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	11/20/19	6.91	60.53	48,005.98099051

Design	As Drilled				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	86.28	

Survey Program	Date	02/26/20			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
475.0	6,104.0	Stryker Surveys (Original Hole)	MWD	MWD - Standard	

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
422.0	0.70	0.00	422.0	0.0	0.0	0.0	0.00	0.00	0.00	
475.0	0.60	224.80	475.0	0.1	-0.2	-0.2	2.27	-0.19	-255.09	
661.0	0.20	148.90	661.0	-0.8	-0.7	-0.8	0.31	-0.22	-40.81	
848.0	0.70	119.20	848.0	-1.7	0.5	0.3	0.29	0.27	-15.88	
1,037.0	1.30	104.70	1,037.0	-2.8	3.5	3.3	0.34	0.32	-7.67	
1,226.0	1.60	106.70	1,225.9	-4.1	8.1	7.9	0.16	0.16	1.06	
1,414.0	1.10	104.40	1,413.8	-5.3	12.4	12.0	0.27	-0.27	-1.22	
1,602.0	0.90	100.60	1,601.8	-6.0	15.6	15.2	0.11	-0.11	-2.02	
1,790.0	0.40	72.70	1,789.8	-6.1	17.7	17.2	0.31	-0.27	-14.84	
1,979.0	2.50	70.30	1,978.7	-4.5	22.2	21.8	1.11	1.11	-1.27	



Stryker Energy Directional Services

Survey Report



Company:	Burnett Oil Company	Local Co-ordinate Reference:	Site Section 14I-17S-30E
Project:	Eddy County, N.M. (NAD 83)	TVD Reference:	3693+19 @ 3712.0usft
Site:	Section 14I-17S-30E	MD Reference:	3693+19 @ 3712.0usft
Well:	Gissler A #52	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	As Drilled	Database:	EDM5000

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
2,167.0	1.60	57.30	2,166.6	-1.7	28.3	28.1	0.54	-0.48	-6.91
2,357.0	1.80	68.60	2,356.5	0.8	33.3	33.2	0.20	0.11	5.95
2,545.0	2.20	80.10	2,544.4	2.5	39.6	39.6	0.30	0.21	6.12
2,734.0	2.90	93.10	2,733.2	2.9	47.9	48.0	0.48	0.37	6.88
2,922.0	4.30	90.80	2,920.9	2.5	59.7	59.8	0.75	0.74	-1.22
3,111.0	4.20	92.20	3,109.3	2.2	73.7	73.7	0.08	-0.05	0.74
3,299.0	3.90	89.90	3,296.9	1.9	87.0	86.9	0.18	-0.16	-1.22
3,488.0	2.60	119.20	3,485.6	-0.2	97.2	96.9	1.09	-0.69	15.50
3,677.0	1.50	140.30	3,674.4	-4.2	102.5	102.0	0.70	-0.58	11.16
3,865.0	1.50	160.30	3,862.4	-8.4	104.9	104.1	0.28	0.00	10.64
4,053.0	1.00	12.50	4,050.4	-9.1	106.1	105.3	1.28	-0.27	-78.62
4,241.0	0.70	41.80	4,238.3	-6.6	107.2	106.5	0.28	-0.16	15.59
4,430.0	0.70	30.90	4,427.3	-4.8	108.5	108.0	0.07	0.00	-5.77
4,618.0	0.80	22.50	4,615.3	-2.6	109.6	109.2	0.08	0.05	-4.47
4,807.0	0.70	36.90	4,804.3	-0.4	110.8	110.6	0.11	-0.05	7.62
4,995.0	0.70	38.40	4,992.3	1.4	112.2	112.1	0.01	0.00	0.80
5,184.0	0.40	58.10	5,181.3	2.6	113.5	113.4	0.19	-0.16	10.42
5,472.0	0.50	41.40	5,469.3	4.1	115.2	115.2	0.06	0.03	-5.80
5,560.0	0.40	50.80	5,557.3	4.6	115.7	115.7	0.14	-0.11	10.68
5,748.0	0.50	57.40	5,745.3	5.4	116.9	117.0	0.06	0.05	3.51
5,935.0	0.80	60.30	5,932.2	6.5	118.7	118.9	0.16	0.16	1.55
6,049.0	0.80	53.80	6,046.2	7.4	120.0	120.3	0.08	0.00	-5.70
6,104.0	0.80	53.80	6,101.2	7.8	120.7	120.9	0.00	0.00	0.00
6104.0' Projected to bit									

Design Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
6,104.0	6,101.2	7.8	120.7	6104.0' Projected to bit

Checked By: _____ Approved By: _____ Date: _____

BURNETT OIL CO., INC.

Burnett Oil Company

Eddy County, N.M. (NAD 83)

Section 14I-17S-30E

Gissler A #52

Original Hole

Design: As Drilled

Survey Report - Geographic

28 February, 2020





Stryker Energy Directional Services

Survey Report - Geographic



Company:	Burnett Oil Company	Local Co-ordinate Reference:	Site Section 14I-17S-30E
Project:	Eddy County, N.M. (NAD 83)	TVD Reference:	3693+19 @ 3712.0usft
Site:	Section 14I-17S-30E	MD Reference:	3693+19 @ 3712.0usft
Well:	Gissler A #52	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	As Drilled	Database:	EDM5000

Project	Eddy County, N.M. (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Section 14I-17S-30E		
Site Position:		Northing:	666,559.00 usft
From:	Map	Easting:	662,899.30 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 49' 54.377 N
		Longitude:	103° 56' 15.253 W
		Grid Convergence:	0.21 °

Well	Gissler A #52		
Well Position	+N/-S	0.0 usft	Northing: 666,559.00 usft
	+E/-W	0.0 usft	Easting: 662,899.30 usft
Position Uncertainty	0.0 usft	Wellhead Elevation:	19.0 usft
		Latitude:	32° 49' 54.377 N
		Longitude:	103° 56' 15.253 W
		Ground Level:	3,693.0 usft

Wellbore	Original Hole		
Magnetics	Model Name	Sample Date	Declination (°)
	IGRF2015	11/20/19	6.91
			Dip Angle (°) 60.53
			Field Strength (nT) 48,005.98099051

Design	As Drilled		
Audit Notes:			
Version:	1.0	Phase:	ACTUAL
		Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)
	0.0	0.0	0.0
			Direction (°) 86.28

Survey Program	Date 02/26/20		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name
475.0	6,104.0	Stryker Surveys (Original Hole)	MWD
			Description MWD - Standard

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
422.0	0.70	0.00	422.0	0.0	0.0	666,559.00	662,899.30	32° 49' 54.377 N	103° 56' 15.253 W
475.0	0.60	224.80	475.0	0.1	-0.2	666,559.13	662,899.11	32° 49' 54.378 N	103° 56' 15.255 W
661.0	0.20	148.90	661.0	-0.8	-0.7	666,558.16	662,898.59	32° 49' 54.369 N	103° 56' 15.261 W
848.0	0.70	119.20	848.0	-1.7	0.5	666,557.33	662,899.76	32° 49' 54.361 N	103° 56' 15.248 W
1,037.0	1.30	104.70	1,037.0	-2.8	3.5	666,556.22	662,902.84	32° 49' 54.349 N	103° 56' 15.212 W
1,226.0	1.60	106.70	1,225.9	-4.1	8.1	666,554.92	662,907.44	32° 49' 54.336 N	103° 56' 15.158 W
1,414.0	1.10	104.40	1,413.8	-5.3	12.4	666,553.71	662,911.70	32° 49' 54.324 N	103° 56' 15.108 W
1,602.0	0.90	100.60	1,601.8	-6.0	15.6	666,552.99	662,914.90	32° 49' 54.317 N	103° 56' 15.071 W
1,790.0	0.40	72.70	1,789.8	-6.1	17.7	666,552.92	662,916.98	32° 49' 54.316 N	103° 56' 15.046 W
1,979.0	2.50	70.30	1,978.7	-4.5	22.2	666,554.50	662,921.49	32° 49' 54.332 N	103° 56' 14.993 W
2,167.0	1.60	57.30	2,166.6	-1.7	28.3	666,557.30	662,927.56	32° 49' 54.359 N	103° 56' 14.922 W
2,357.0	1.80	68.60	2,356.5	0.8	33.3	666,559.82	662,932.57	32° 49' 54.384 N	103° 56' 14.863 W



Stryker Energy Directional Services

Survey Report - Geographic



Company:	Burnett Oil Company	Local Co-ordinate Reference:	Site Section 14I-17S-30E
Project:	Eddy County, N.M. (NAD 83)	TVD Reference:	3693+19 @ 3712.0usft
Site:	Section 14I-17S-30E	MD Reference:	3693+19 @ 3712.0usft
Well:	Gissler A #52	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	As Drilled	Database:	EDM5000

Survey


Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
2,545.0	2.20	80.10	2,544.4	2.5	39.6	666,561.52	662,938.87	32° 49' 54.401 N	103° 56' 14.789 W
2,734.0	2.90	93.10	2,733.2	2.9	47.9	666,561.89	662,947.22	32° 49' 54.404 N	103° 56' 14.691 W
2,922.0	4.30	90.80	2,920.9	2.5	59.7	666,561.53	662,959.02	32° 49' 54.400 N	103° 56' 14.553 W
3,111.0	4.20	92.20	3,109.3	2.2	73.7	666,561.17	662,973.02	32° 49' 54.396 N	103° 56' 14.389 W
3,299.0	3.90	89.90	3,296.9	1.9	87.0	666,560.91	662,986.29	32° 49' 54.393 N	103° 56' 14.234 W
3,488.0	2.60	119.20	3,485.6	-0.2	97.2	666,558.83	662,996.46	32° 49' 54.372 N	103° 56' 14.114 W
3,677.0	1.50	140.30	3,674.4	-4.2	102.5	666,554.84	663,001.78	32° 49' 54.332 N	103° 56' 14.052 W
3,865.0	1.50	160.30	3,862.4	-8.4	104.9	666,550.63	663,004.18	32° 49' 54.290 N	103° 56' 14.024 W
4,053.0	1.00	12.50	4,050.4	-9.1	106.1	666,549.91	663,005.37	32° 49' 54.283 N	103° 56' 14.010 W
4,241.0	0.70	41.80	4,238.3	-6.6	107.2	666,552.37	663,006.49	32° 49' 54.308 N	103° 56' 13.997 W
4,430.0	0.70	30.90	4,427.3	-4.8	108.5	666,554.22	663,007.85	32° 49' 54.326 N	103° 56' 13.981 W
4,618.0	0.80	22.50	4,615.3	-2.6	109.6	666,556.42	663,008.94	32° 49' 54.348 N	103° 56' 13.968 W
4,807.0	0.70	36.90	4,804.3	-0.4	110.8	666,558.56	663,010.14	32° 49' 54.369 N	103° 56' 13.954 W
4,995.0	0.70	38.40	4,992.3	1.4	112.2	666,560.38	663,011.55	32° 49' 54.387 N	103° 56' 13.938 W
5,184.0	0.40	58.10	5,181.3	2.6	113.5	666,561.63	663,012.82	32° 49' 54.399 N	103° 56' 13.923 W
5,472.0	0.50	41.40	5,469.3	4.1	115.2	666,563.11	663,014.51	32° 49' 54.414 N	103° 56' 13.903 W
5,560.0	0.40	50.80	5,557.3	4.6	115.7	666,563.59	663,015.00	32° 49' 54.418 N	103° 56' 13.897 W
5,748.0	0.50	57.40	5,745.3	5.4	116.9	666,564.45	663,016.20	32° 49' 54.427 N	103° 56' 13.883 W
5,935.0	0.80	60.30	5,932.2	6.5	118.7	666,565.53	663,018.02	32° 49' 54.437 N	103° 56' 13.861 W
6,049.0	0.80	53.80	6,046.2	7.4	120.0	666,566.40	663,019.35	32° 49' 54.446 N	103° 56' 13.846 W
6,104.0	0.80	53.80	6,101.2	7.8	120.7	666,566.85	663,019.97	32° 49' 54.450 N	103° 56' 13.838 W

6104.0' Projected to bit

Design Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
6,104.0	6,101.2	7.8	120.7	6104.0' Projected to bit

Checked By: _____ Approved By: _____ Date: _____

Submit To Appropriate District Office Two Copies District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505				Form C-105 Revised April 3, 2017				
		1. WELL API NO.		30-015-45640						
		2. Type of Lease		☐ STATE ☐ FEE ☒ FED/INDIAN						
		3. State Oil & Gas Lease No.								
WELL COMPLETION OR RECOMPLETION REPORT AND LOG										
4. Reason for filing:						5. Lease Name or Unit Agreement Name				
☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)						Gissler A				
7. Type of Completion:						6. Well Number:				
☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER						52				
8. Name of Operator						9. OGRID				
Burnett Oil Co. Inc.						03080				
10. Address of Operator						11. Pool name or Wildcat				
Burnett Plaza - Suite 1500						Cedar Lake Glorieta Yeso				
801 Cherry Street - Unit 9										
Fort Worth, Texas 76102										
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	I	14	17S	30E		1650	South	1100	East	Eddy
BH:	I	14	17S	30E		1658	South	979	East	Eddy
13. Date Spudded	14. Date T.D. Reached	15. Date Rig Released		16. Date Completed (Ready to Produce)		17. Elevations (DF and RKB, RT, GR, etc.)				
2/19/2020	2/27/2020	2/27/2020		12/11/2020		3693' GL				
18. Total Measured Depth of Well		19. Plug Back Measured Depth		20. Was Directional Survey Made?		21. Type Electric and Other Logs Run				
6104		6094		Yes		CNL				
22. Producing Interval(s), of this completion - Top, Bottom, Name										
Glorieta - 4444-4522' , Yeso - 4522'										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
16"		37		150		20"				
8.625"		24		421		12.5"		480		
5.5"		17		6099		7.875"		580		
24. LINER RECORD										
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	25. TUBING RECORD					
					SIZE	DEPTH SET	PACKER SET			
					2.875"	4644	2627			
26. Perforation record (interval, size, and number)										
4537 - 4697, 0.42, 40, Open										
4754 - 4995, 0.42, 40, Open										
5108-5405, 0.42, 40, Open										
5587-5916; 0.42, 40, Open										
27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.										
DEPTH INTERVAL					AMOUNT AND KIND MATERIAL USED					
4537-4697					FRAC 561,876 GAL SW+29,800# 100 MESH+208,060# 40/70+38,180# 40/70CS					
4754-4995					FRAC 568,932 GAL SW+29,800# 100 MESH+208,600# 40/70+37,600# 40/70CS					
5108-5405					FRAC 568,932 GAL SW+29,800# 100 MESH+208,600# 40/70+37,600# 40/70CS					
5587-5916					FRAC 570,864 GAL SW+30,200# 100 MESH+209,000# 40/70+37,300# 40/70CS					
28. PRODUCTION										
Date First Production		Production Method (Flowing, gas lift, pumping - Size and type pump)				Well Status (Prod. or Shut-in)				
12/11/2020		Electric Pumping Unit				Producing				
Date of Test	Hours Tested	Choke Size	Prod'n For Test Period	Oil - Bbl	Gas - MCF	Water - Bbl.	Gas - Oil Ratio			
12/21/20	24			109	198	339				
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.	Oil Gravity - API - (Corr.)				
300	80					40.0				
29. Disposition of Gas (Sold, used for fuel, vented, etc.)							30. Test Witnessed By			
Sold										
31. List Attachments										
As drilled C-102, Directional Survey, CNL										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.							33. Rig Release Date:			
34. If an on-site burial was used at the well, report the exact location of the on-site burial.										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Signature		Printed Name		Title		Regulatory Manager		Date		
		Leslie Garvis						1/26/2021		
E-mail Address										
lgarvis@burnettoil.com										

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 18221

CONDITIONS OF APPROVAL

Operator:	OGRID:	Action Number:	Action Type:
BURNETT OIL CO INC 801 Cherry Street Unit #9 Suite 1500 Fort Worth, TX76102	3080	18221	C-104C
OCD Reviewer	Condition		
ksimmons	None		