Sundry Print Report

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Well Name: PEACHTREE 25 FED Well Location: T26S / R33E / SEC 25 / County or Parish/State:

COM NWNW /

Well Number: 751H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM0002965a Unit or CA Name: Unit or CA Number:

US Well Number: 3002549058 Well Status: Approved Application for Operator: EOG RESOURCES

Permit to Drill INCORPORATED

#### **Notice of Intent**

**Sundry ID:** 2633295

Type of Submission: Notice of Intent

Type of Action: Other

Date Sundry Submitted: 09/08/2021 Time Sundry Submitted: 03:08

Date proposed operation will begin: 10/15/2021

**Procedure Description:** EOG respectfully requests an amendment to our approved APD for this well to reflect the following changes: Change name from #741H to #751H. Change target formation to Wolfcamp M1. Update casing and cement program to current design.

### **Surface Disturbance**

Is any additional surface disturbance proposed?: No

### **NOI Attachments**

#### **Procedure Description**

PEACHTREE\_25\_FED\_COM\_\_20210908150808

Peachtree\_25\_Fed\_Com\_751H\_Wall\_Plot\_20210908150801.pdf

 $Peachtree\_25\_Fed\_Com\_751H\_Sundry\_Info\_\_\_Rev\_Name\_\_tgt\_\_csg\_9.7.2021\_20210908150801.pdf$ 

Peachtree\_25\_Fed\_Com\_751H\_Planning\_Report\_20210908150752.pdf

9\_5\_8\_\_36ppf\_J\_55\_LTC\_20210908150740.pdf

eived by OCD: 9/27/2021 5:58:03 AM Well Name: PEACHTREE 25 FED Well Location: T26S / R33E / SEC 25 / County or Parish/State:

COM NWNW /

Well Number: 751H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM0002965a **Unit or CA Name: Unit or CA Number:** 

**US Well Number: 3002549058** Well Status: Approved Application for **Operator:** EOG RESOURCES

> Permit to Drill **INCORPORATED**

Page 2 o

# **Operator Certification**

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

**Operator Electronic Signature: STAR HARRELL** Signed on: SEP 08, 2021 03:08 PM

Name: EOG RESOURCES INCORPORATED

Title: Regulatory Specialist

Street Address: 5509 CHAMPIONS DRIVE

City: MIDLAND State: TX

Phone: (432) 848-9161

Email address: STAR\_HARRELL@EOGRESOURCES.COM

## Field Representative

Representative Name: Eric Brorman Street Address: 5509 Champions Drive

City: Midland State: TX **Zip:** 79706

Phone: (432)556-1276

Email address: eric\_brorman@eogresources.com

### **BLM Point of Contact**

**BLM POC Name: CHRISTOPHER WALLS BLM POC Title:** Petroleum Engineer

**BLM POC Phone:** 5752342234 BLM POC Email Address: cwalls@blm.gov

Disposition Date: 09/24/2021 **Disposition:** Approved

Signature: Chris Walls

Page 2 of 2

District I 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 District III 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT

#### WELL LOCATION AND ACREAGE DEDICATION PLAT


	<sup>1</sup> API Number		<sup>3</sup> Pool Name WC-025 G-09 S253309P; l	Jpper Wolfcamp
<sup>4</sup> Property Code 331002		<sup>6</sup> Well Number 751H		
<sup>7</sup> OGRID №. 7377		•	perator Name SOURCES, INC.	<sup>9</sup> Elevation 3344'

<sup>10</sup>Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	25	26-S	33-E	_	250	NORTH	825'	WEST	LEA

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	13	26-S	33-E	-	100'	NORTH	586'	WEST	LEA
<sup>12</sup> Dedicated Acres 640	<sup>13</sup> Joint or I	nfill <sup>14</sup> Co	onsolidation Cod	le <sup>15</sup> Ord	er No.	•			

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

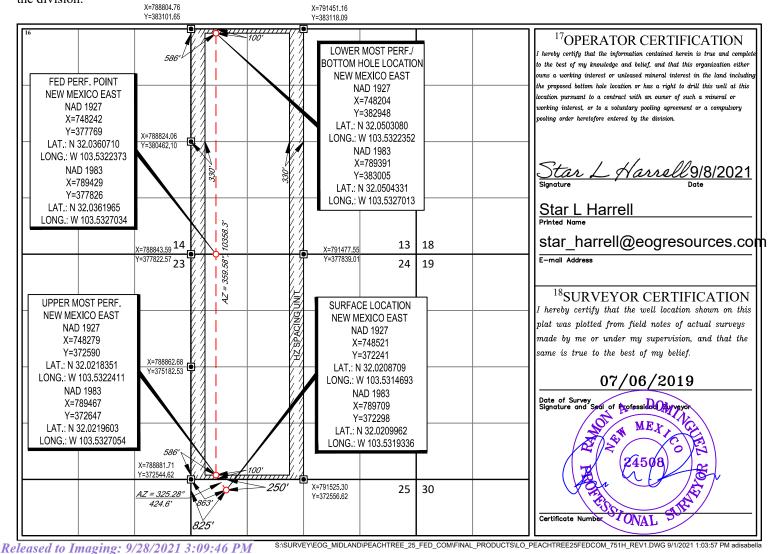



### Peachtree 25 Fed Com 751H

#### **Revised Permit Information 09/07/2021:**

Well Name: Peachtree 25 Fed Com 751H

SHL: 250' FNL & 825' FWL, Section 25, T-26-S, R-33-E, Lea Co., N.M.

BHL: 100' FNL & 586' FWL, Section 13, T-26-S, R-33-E, Lea Co., N.M.

### **Casing Program:**

Hole		Csg				DFmin	DFmin	DFmin
Size	Interval	OD	Weight	Grade	Conn	Collapse	Burst	Tension
12.25"	0' - 1,010'	9.625"	36#	J-55	LTC	1.125	1.25	1.6
8.75"	0' - 11,130'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.6
6.75"	0' - 10,630'	5.5"	20#	P-110EC	DWC/C-IS MS	1.125	1.25	1.6
6.75"	10,630' - 11,130'	5.5"	20#	P-110EC	VAM SFC	1.125	1.25	1.6
6.75"	11,130' - 23,432'	5.5"	20#	P-110EC	DWC/C-IS MS	1.125	1.25	1.6

Variance is requested to waive the centralizer requirements for the 7-5/8" casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4 hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 5-1/2" casing by 7-5/8" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Onshore Order #2 under the following conditions:

- Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

#### Cementing Program:

		Wt.	Yld	Slurry Description
Depth	No. Sacks	ppg	Ft3/sk	Sidily Description
1,010' 9-5/8''	290	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl2 + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	80	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 804')
11,130' 7-5/8''	470	14.2	1.11	1st Stage (Tail): Class C + 0.6% Halad-9 + 0.45% HR-601 + 3% Microbond (TOC @ 7,178')
	1230	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface)
23,432' 5-1/2''	1080	14.2	1.31	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,629')



#### Peachtree 25 Fed Com 751H

Additive	Purpose
Bentonite Gel	Lightweight/Lost circulation prevention
Calcium Chloride	Accelerator
Cello-flake	Lost circulation prevention
Sodium Metasilicate	Accelerator
MagOx	Expansive agent
Pre-Mag-M	Expansive agent
Sodium Chloride	Accelerator
FL-62	Fluid loss control
Halad-344	Fluid loss control
Halad-9	Fluid loss control
HR-601	Retarder
Microbond	Expansive Agent

EOG requests variance from minimum standards to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,378') and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 1,226 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

#### **Mud Program:**

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,010'	Fresh - Gel	8.6-8.8	28-34	N/c
1,010' – 11,130'	Brine	10.0-10.2	28-34	N/c
11,130' – 12,751'	Oil Base	8.7-9.4	58-68	N/c - 6
12,751' – 23,432'	Oil Base	10.0-14.0	58-68	4 - 6



#### Peachtree 25 Fed Com 751H

250' FNL 825' FWL **Revised Wellbore** 

KB: 3369' GL: 3344'

Section 25

T-26-S, R-33-E

API: 30-025-49058

Bit Size: 12-1/4" 9-5/8", 36#, J-55, LTC, 0' - 1,010" Bit Size: 8-3/4" 7-5/8", 29.7#, HCP-110, FXL, 0' -11,130' TOC: 10,629' Bit Size: 6-3/4" Lateral: 23,432' MD, 13,217' TVD 5-1/2", 20#, P-110EC, DWC/C-IS MS, @ 0' -**Upper Most Perf:** 100' FSL & 586' FWL Sec. 24 10,630' **Lower Most Perf:** 5-1/2", 20#, P-110EC, VAM SFC, @ 10,630' -100' FNL & 586' FWL Sec. 13 BH Location: 100' FNL & 586' FWL Sec. 13 5-1/2", 20#, P-110EC, DWC/C-IS MS, @ 11,130' -T-26-S R-33-E 23,432' KOP: 12,751'

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505** 

CONDITIONS

Action 51911

#### **CONDITIONS**

Operator:	OGRID:
EOG RESOURCES INC	7377
P.O. Box 2267	Action Number:
Midland, TX 79702	51911
	Action Type:
	[C-103] NOI Change of Plans (C-103A)

#### CONDITIONS

Created By	Condition	Condition Date
pkautz	None	9/28/2021