

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104
Revised August 1, 2011

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address Enduring Resources IV LLC. 200 Energy Court Farmington NM 87401		² OGRID Number 372286	
		³ Reason for Filing Code/ Effective Date RT	
⁴ API Number 30-045-38269	⁵ Pool Name LYBROOK MANCOS W		⁶ Pool Code 98157
⁷ Property Code 321259	⁸ Property Name W LYBROOK UNIT		⁹ Well Number #761H

II. ¹⁰ Surface Location

UL or lot no. M	Section 23	Township 23N	Range 9W	Lot Idn	Feet from the 495'	North/South Line South	Feet from the 561'	East/West line West	County San Juan
--------------------	---------------	-----------------	-------------	---------	-----------------------	---------------------------	-----------------------	------------------------	--------------------

¹¹ Bottom Hole Location

UL or lot no. A	Section 21	Township 23N	Range 9W	Lot Idn	Feet from the 148'	North/South line North	Feet from the 294'	East/West line East	County San Juan
¹² Lse Code F	¹³ Producing Method Code		¹⁴ Gas Connection Date 4/25/2022		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
248440	WESTERN REFINING COMPANY, LLC	O
373888	HARVEST FOUR CORNERS. LLC	G

IV. Well Completion Data

²¹ Spud Date 12/29/2021	²² Ready Date 5/4/2022	²³ TD 12697' MD 4718' TVD	²⁴ PBDT 12667.5' MD 4728' TVD	²⁵ Perforations ~ 5118'-12662' MD ~ 4636'-4728' TVD	²⁶ DHC, MC R-14051	
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set		³⁰ Sacks Cement
17-1/2"		13-3/8",54.5#, J-55		360' MD		350 sx - surface
12-1/4"		9-5/8",36#, J-55		2677' MD		642 sx- surface
8-1/2"		5-1/2",17#, P-110		12782' MD		1924 sx- surface

V. Well Test Data

³¹ Date New Oil	³² Gas Delivery Date	³³ Test Date	³⁴ Test Length	³⁵ Tbg. Pressure	³⁶ Csg. Pressure
³⁷ Choke Size	³⁸ Oil	³⁹ Water	⁴⁰ Gas		⁴¹ Test Method

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: <i>Kayla White</i> Printed name: Kayla White Title: Associate Consultant, Environmental Engineer E-mail Address: Kayla.N.White@wsp.com Date: 3/24/2022	Phone: 720-768-3575	OIL CONSERVATION DIVISION Approved by: <i>PATRICIA MARTINEZ</i> Title: <i>PETROLEUM SPECIALIST</i> Approval Date: <i>4/27/2022</i> <i>RT EXPIRES 7/27/2022</i>
---	------------------------	--



ENDURING RESOURCES IV LLC

March 22, 2022

Re: W LYBROOK UNIT 761H- 30-045-38269

Pursuant to NMOCD rule 19.15.7.16(C) request is herein made to keep all data and accompanying attachments contained in form C-105 confidential.

Sincerely,

Heather Huntington
Permitting Technician
Enduring Resources, LLC.
hhuntington@enduringresources.com

District II
811 S. First Street, Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Drive, Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

OIL CONSERVATION DIVISION
1220 South St. Francis Drive
Santa Fe, NM 87505

☐ AMENDED REPORT

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: Heather Huntington Date: 3/28/22

Printed Name: Heather Huntington

E-mail Address: hhuntington@enduringresources.com

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date Revised: MARCH 25, 2022
Survey Date: SEPTEMBER 10, 2015

Signature and Seal of Professional Surveyor



JASON C. EDWARDS
Certificate Number 15269

1 API Number 30-045-28269		2 Pool Code 98157		3 Pool Name LYBROOK MANCOS W	
4 Property Code 321259		5 Property Name W LYBROOK UNIT			6 Well Number 761H
7 OGRID No. 372286		8 Operator Name ENDURING RESOURCES, LLC			9 Elevation 6747'

10 Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	23	23N	9W		495	SOUTH	561	WEST	SAN JUAN

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	21	23N	9W		148	NORTH	294	EAST	SAN JUAN

12 Dedicated Acres
560.00


NE/4 NE/4 - Section 21
NW/4, SW/4 NE/4
NE/4 SW/4, SE/4 - Section 22
SW/4 SW/4 - Section 23
NW/4 NW/4 - Section 26
NE/4 NE/4 - Section 27

13 Joint or Infill

14 Consolidation Code

15 Order No.
R-14051
12,807.24 ACRES

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

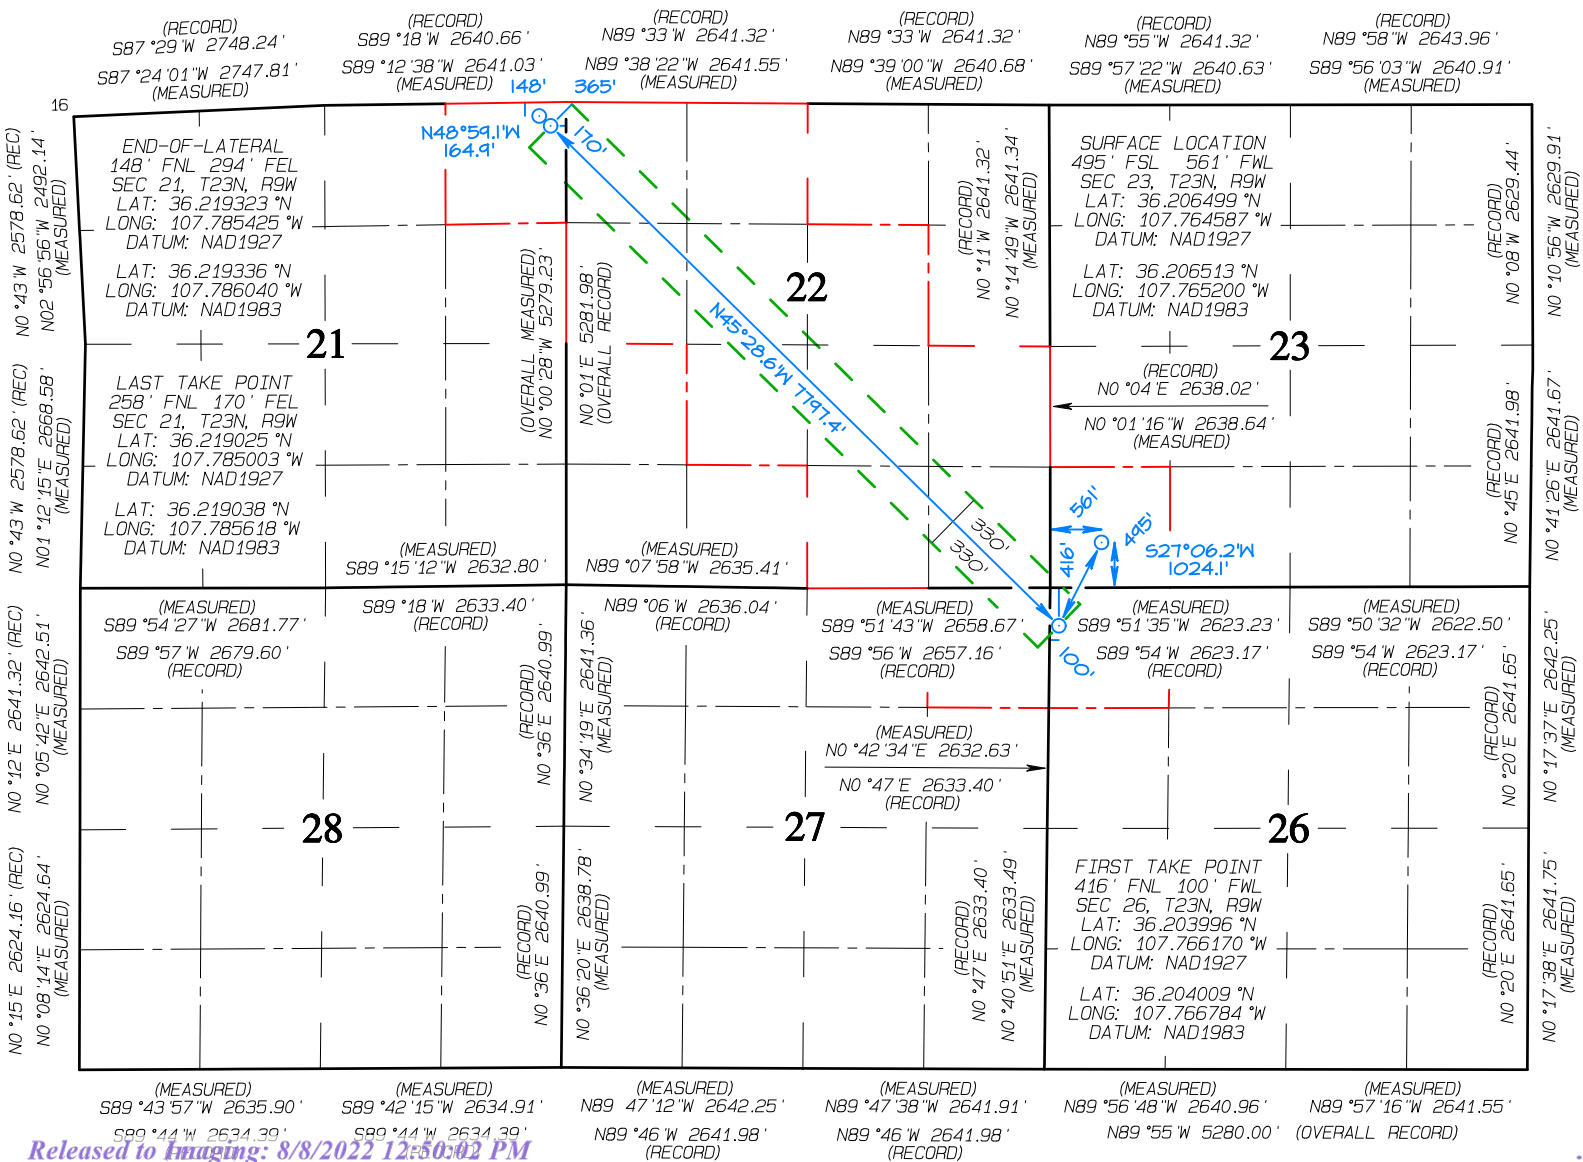

District II
811 S. First Street, Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Drive, Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

OIL CONSERVATION DIVISION
1220 South St. Francis Drive
Santa Fe, NM 87505

☐ AMENDED REPORT

Submit one copy to
Appropriate District Office

17 OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: Heather Huntington Date: 3/28/22
Printed Name: Heather Huntington
E-mail Address: hhuntington@enduringresources.com

1 API Number 30-045-38269		2 Pool Code 98157		3 Pool Name LYBROOK MANCOS W	
4 Property Code 321259		5 Property Name W LYBROOK UNIT		6 Well Number 761H	
7 OGRID No. 372286		8 Operator Name ENDURING RESOURCES, LLC		9 Elevation 6747'	

18 SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date Revised: **MARCH 25, 2022**
Survey Date: **SEPTEMBER 10, 2015**
Signature and Seal of Professional Surveyor



JASON C. EDWARDS
Certificate Number **15269**

10 Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	23	23N	9W		495	SOUTH	561	WEST	SAN JUAN

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	21	23N	9W		148	NORTH	294	EAST	SAN JUAN

12 Dedicated Acres
560.00


NE/4 NE/4 - Section 21
NW/4, SW/4 NE/4
NE/4 SW/4, SE/4 - Section 22
SW/4 SW/4 - Section 23
NW/4 NW/4 - Section 26
NE/4 NE/4 - Section 27

13 Joint or Infill

14 Consolidation Code

15 Order No.
R-14051
12,807.24 ACRES

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

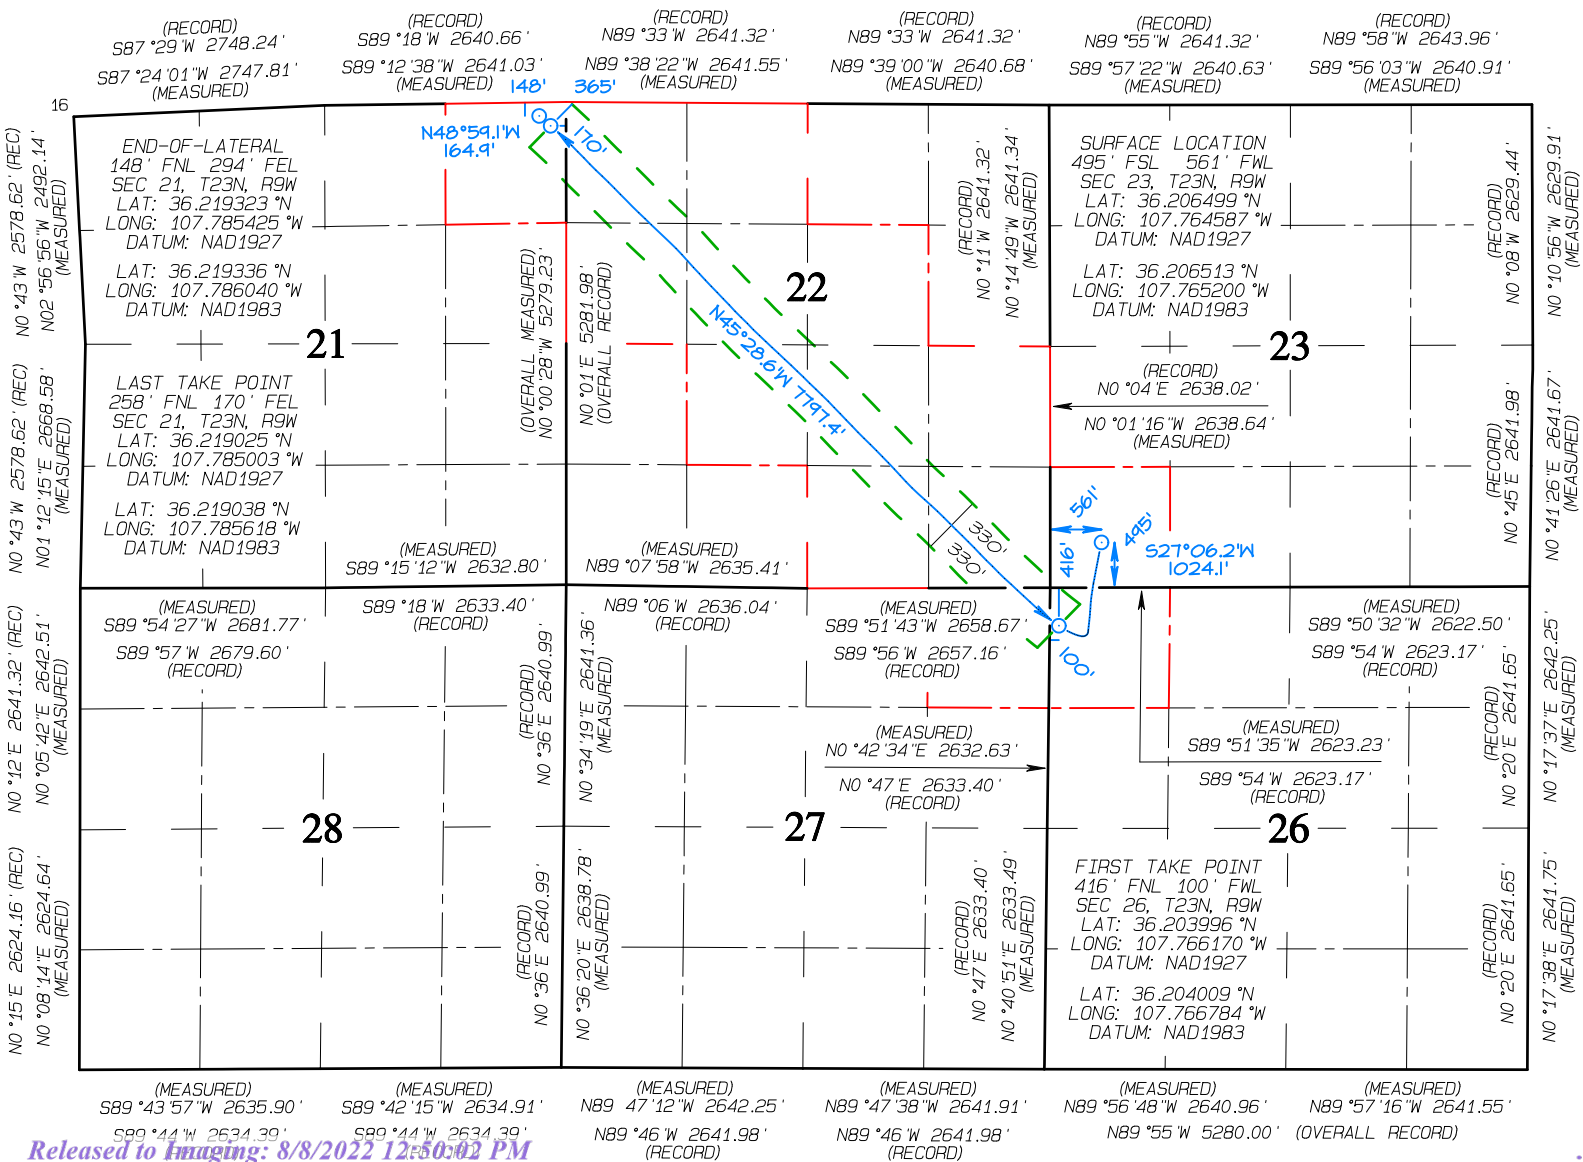

(A) 318' FNL 0' FEL
SEC 27, T23N, R9W
LAT: 36.204263 °N
LONG: 107.766504 °W
DATUM: NAD1927

LAT: 36.204276 °N
LONG: 107.767118 °W
DATUM: NAD1983

(B) 0' FNL 327' FEL
SEC 27, T23N, R9W
LAT: 36.205136 °N
LONG: 107.767598 °W
DATUM: NAD1927

LAT: 36.205149 °N
LONG: 107.768212 °W
DATUM: NAD1983

(C) 2297' FSL 2655' FEL
SEC 22, T23N, R9W
LAT: 36.211433 °N
LONG: 107.775489 °W
DATUM: NAD1927

LAT: 36.211447 °N
LONG: 107.776103 °W
DATUM: NAD1983

(D) 2659' FSL 2264' FWL
SEC 22, T23N, R9W
LAT: 36.212445 °N
LONG: 107.776757 °W
DATUM: NAD1927

LAT: 36.212458 °N
LONG: 107.777371 °W
DATUM: NAD1983

(E) 428' FNL 0' FWL
SEC 22, T23N, R9W
LAT: 36.218566 °N
LONG: 107.784427 °W
DATUM: NAD1927

LAT: 36.218579 °N
LONG: 107.785042 °W
DATUM: NAD1983



Well: W Lybrook Unit No. 761H
Site: W Lybrook 726 Pad (726, 728, 729, 760 & 761)
Project: San Juan County, New Mexico NAD83 NM W
Design: Surveys Original Hole
Rig: Ensign 773



Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: New Mexico Western Zone
 System Datum: Mean Sea Level
 Depth Reference: RKB=6747+28 @ 6775.00ft (Ensign 773)
 Surface location:
 Northing 1894475.367 Easting 2743191.974 Latitude 36.206513000 Longitude -107.765200000

Total Corr (M=>G): To convert a Magnetic Direction to a Grid Direction, Add 8.71°



Azimuths to Grid North
 True North: -0.04°
 Magnetic North: 8.71°

Magnetic Field
 Strength: 49234.2nT
 Dip Angle: 62.72°
 Date: 1/14/2022
 Model: IGRF2020

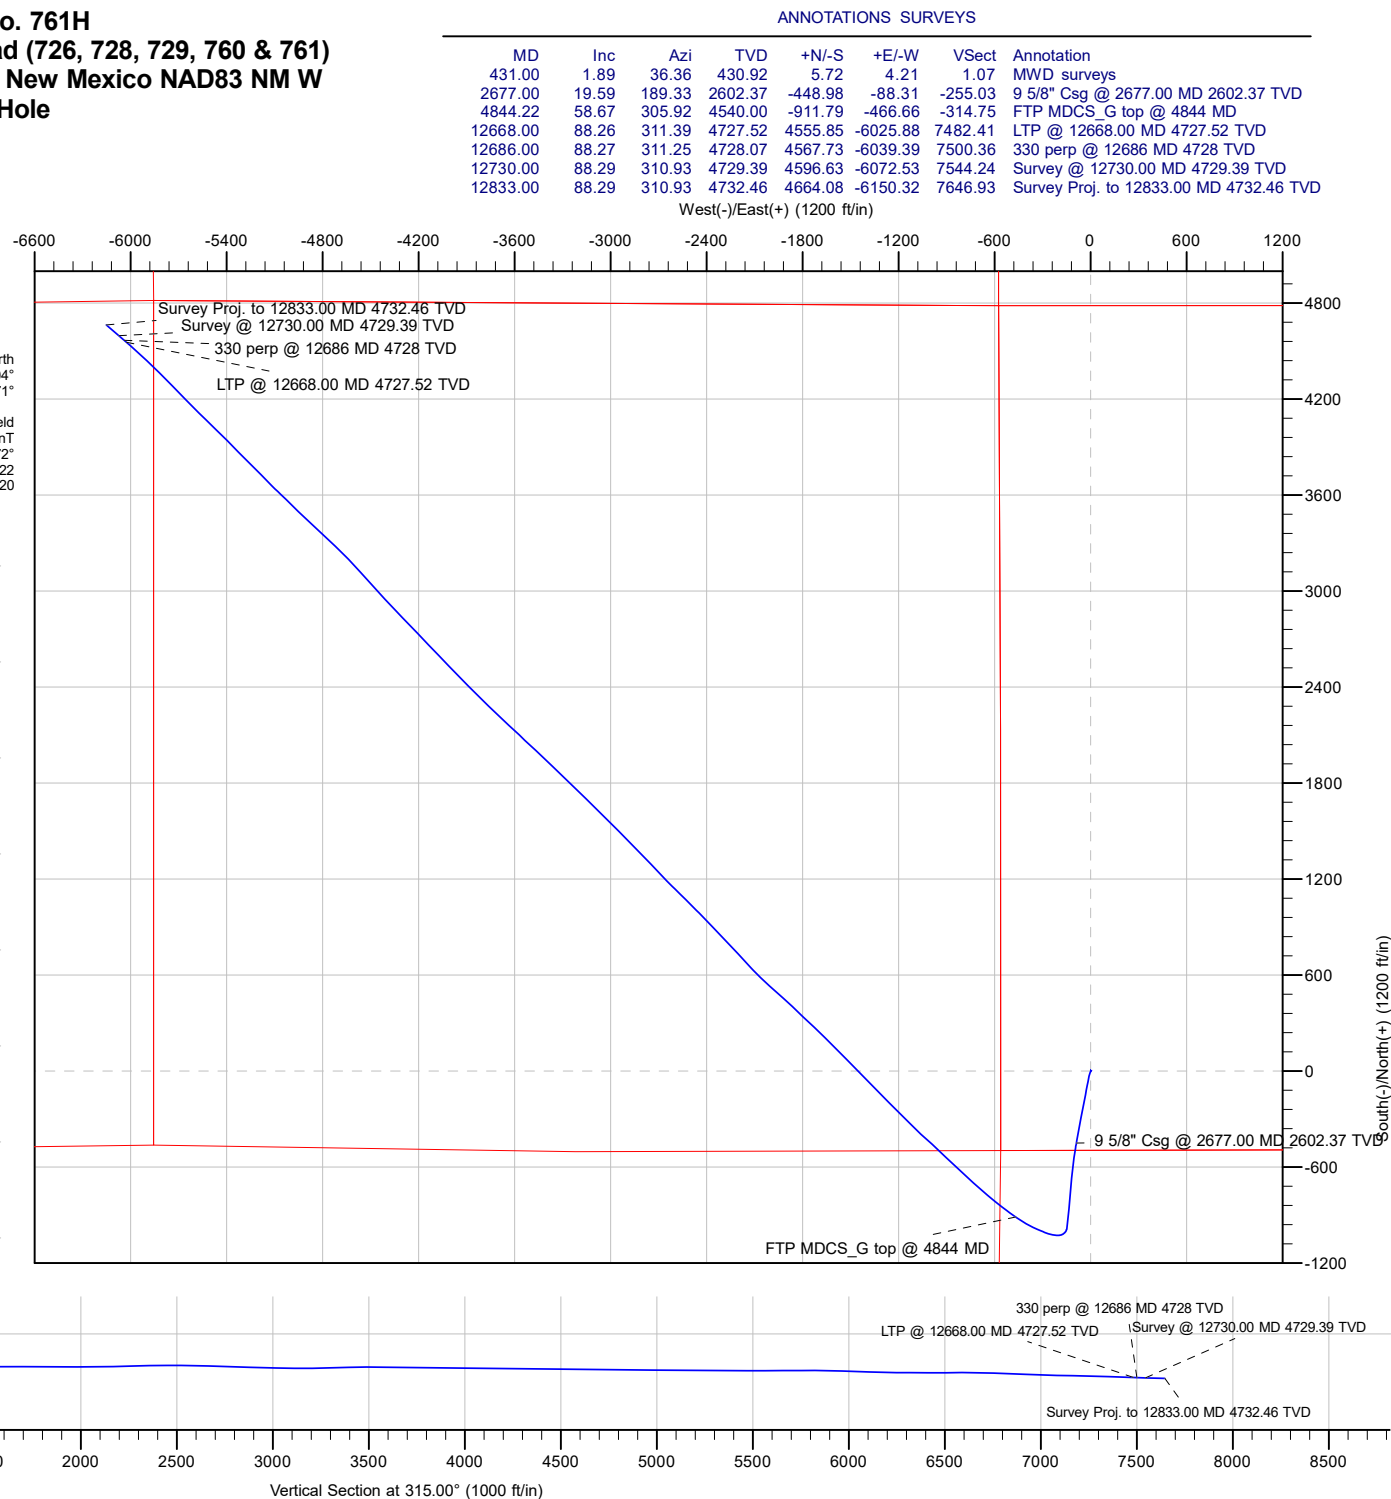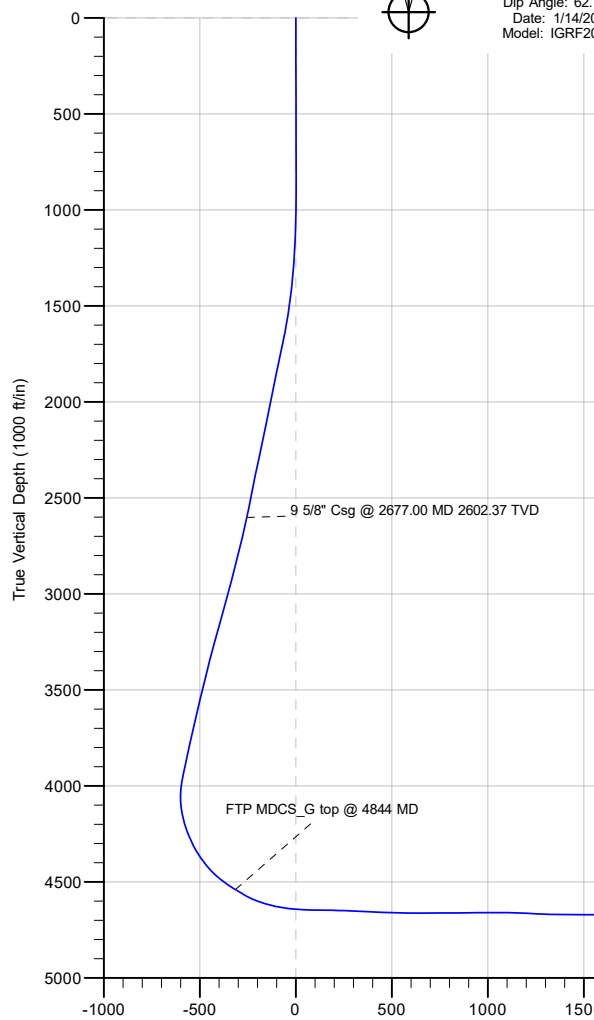



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well W Lybrook Unit No. 761H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Site:	W Lybrook 726 Pad (726, 728, 729, 760 & 761)	MD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Well:	W Lybrook Unit No. 761H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Dec2220_v16

Project	San Juan County, New Mexico NAD83 NM W		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site	W Lybrook 726 Pad (726, 728, 729, 760 & 761)		
Site Position:		Northing:	438,940.217 usft
From:	Lat/Long	Easting:	2,744,242.772 usft
Position Uncertainty:	0.00 ft	Slot Radius:	13-3/16 "
		Latitude:	32.206696000
		Longitude:	-107.764948000

Well	W Lybrook Unit No. 761H, Surf loc: 495 FSL 561 FWL Section 23-T23N-R09W		
Well Position	+N/-S	0.00 ft	Northing: 1,894,475.367 usft
	+E/-W	0.00 ft	Easting: 2,743,191.974 usft
Position Uncertainty	0.00 ft	Wellhead Elevation:	ft
Grid Convergence:	0.04 °	Ground Level:	6,747.00 ft

Wellbore	Original Hole				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	1/14/2022	8.75	62.72	49,234.19269728

Design	Surveys Original Hole				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.00	0.00	0.00		315.00

Survey Program	Date	2/10/2022			
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
431.00	2,637.00	MWD surf (Original Hole)	MWD	OWSG MWD - Standard	
2,703.00	12,730.00	MWD (Original Hole)	MWD	OWSG MWD - Standard	
12,833.00	12,833.00	Projection (Original Hole)	MWD	OWSG MWD - Standard	

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
431.00	1.89	36.36	430.92	5.72	4.21	1.07	0.44	0.44	0.00	
MWD surveys										
493.00	2.02	37.94	492.89	7.41	5.49	1.36	0.23	0.21	2.55	
584.00	0.79	34.95	583.86	9.19	6.84	1.66	1.35	-1.35	-3.29	
675.00	0.31	26.78	674.85	9.92	7.31	1.85	0.53	-0.53	-8.98	
766.00	0.31	79.51	765.85	10.19	7.66	1.79	0.30	0.00	57.95	
857.00	0.70	258.28	856.85	10.12	7.36	1.95	1.11	0.43	196.45	



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well W Lybrook Unit No. 761H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Site:	W Lybrook 726 Pad (726, 728, 729, 760 & 761)	MD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Well:	W Lybrook Unit No. 761H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Dec2220_v16

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
948.00	1.14	225.85	947.84	9.38	6.16	2.27	0.73	0.48	-35.64
1,039.00	3.16	207.74	1,038.77	6.52	4.35	1.54	2.31	2.22	-19.90
1,129.00	6.94	200.54	1,128.41	-0.77	1.28	-1.45	4.25	4.20	-8.00
1,224.00	8.04	200.45	1,222.59	-12.37	-3.05	-6.59	1.16	1.16	-0.09
1,318.00	9.58	196.32	1,315.48	-26.03	-7.55	-13.07	1.77	1.64	-4.39
1,412.00	11.51	190.52	1,407.89	-42.76	-11.46	-22.14	2.34	2.05	-6.17
1,506.00	13.89	190.87	1,499.59	-63.07	-15.30	-33.78	2.53	2.53	0.37
1,600.00	16.88	190.25	1,590.21	-87.58	-19.85	-47.89	3.19	3.18	-0.66
1,693.00	20.17	190.69	1,678.38	-116.63	-25.23	-64.63	3.54	3.54	0.47
1,787.00	19.82	190.34	1,766.71	-148.23	-31.10	-82.83	0.39	-0.37	-0.37
1,882.00	20.43	191.05	1,855.91	-180.35	-37.17	-101.25	0.69	0.64	0.75
1,975.00	20.26	190.69	1,943.11	-212.10	-43.27	-119.39	0.23	-0.18	-0.39
2,070.00	19.78	191.40	2,032.37	-244.02	-49.49	-137.55	0.57	-0.51	0.75
2,165.00	19.86	191.22	2,121.74	-275.61	-55.81	-155.42	0.11	0.08	-0.19
2,259.00	20.79	190.96	2,209.89	-307.65	-62.09	-173.64	0.99	0.99	-0.28
2,354.00	20.96	190.52	2,298.65	-340.91	-68.40	-192.69	0.24	0.18	-0.46
2,448.00	20.39	191.13	2,386.60	-373.51	-74.63	-211.34	0.65	-0.61	0.65
2,542.00	19.20	190.17	2,475.04	-404.79	-80.52	-229.29	1.31	-1.27	-1.02
2,637.00	19.51	190.08	2,564.67	-435.78	-86.05	-247.30	0.33	0.33	-0.09
2,677.00	19.59	189.33	2,602.37	-448.98	-88.31	-255.03	0.65	0.19	-1.87
9 5/8" Csg @ 2677.00 MD 2602.37 TVD									
2,703.00	19.64	188.85	2,626.86	-457.59	-89.69	-260.15	0.65	0.20	-1.86
2,797.00	22.46	190.08	2,714.58	-490.89	-95.26	-279.75	3.04	3.00	1.31
2,891.00	22.98	188.06	2,801.28	-526.74	-100.98	-301.06	1.00	0.55	-2.15
3,007.00	23.47	188.67	2,907.88	-571.99	-107.64	-328.35	0.47	0.42	0.53
3,101.00	23.82	186.30	2,993.99	-609.36	-112.54	-351.31	1.08	0.37	-2.52
3,196.00	23.64	185.07	3,080.96	-647.40	-116.33	-375.53	0.55	-0.19	-1.29
3,291.00	23.12	184.54	3,168.16	-684.97	-119.49	-399.86	0.59	-0.55	-0.56
3,385.00	22.68	184.28	3,254.75	-721.44	-122.30	-423.65	0.48	-0.47	-0.28
3,479.00	21.45	184.72	3,341.87	-756.64	-125.07	-446.59	1.32	-1.31	0.47
3,573.00	20.43	183.84	3,429.66	-790.14	-127.58	-468.50	1.14	-1.09	-0.94
3,668.00	21.62	187.27	3,518.33	-824.05	-130.91	-490.12	1.80	1.25	3.61
3,763.00	20.87	185.86	3,606.88	-858.24	-134.85	-511.52	0.96	-0.79	-1.48
3,858.00	19.42	185.68	3,696.06	-890.79	-138.14	-532.21	1.53	-1.53	-0.19
3,952.00	19.12	185.77	3,784.80	-921.66	-141.23	-551.84	0.32	-0.32	0.10
4,047.00	19.64	187.09	3,874.41	-952.98	-144.77	-571.49	0.72	0.55	1.39
4,078.00	19.03	186.21	3,903.67	-963.18	-145.96	-577.86	2.18	-1.97	-2.84
4,109.00	18.41	184.54	3,933.03	-973.08	-146.89	-584.20	2.64	-2.00	-5.39
4,141.00	18.11	186.91	3,963.42	-983.06	-147.89	-590.55	2.50	-0.94	7.41
4,172.00	18.02	200.36	3,992.90	-992.34	-150.14	-595.52	13.43	-0.29	43.39
4,204.00	18.63	211.52	4,023.29	-1,001.34	-154.54	-598.78	11.11	1.91	34.88
4,235.00	19.25	223.21	4,052.62	-1,009.29	-160.63	-600.09	12.38	2.00	37.71
4,267.00	19.47	234.55	4,082.82	-1,016.23	-168.59	-599.37	11.75	0.69	35.44
4,298.00	19.03	246.42	4,112.10	-1,021.25	-177.43	-596.67	12.68	-1.42	38.29



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well W Lybrook Unit No. 761H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Site:	W Lybrook 726 Pad (726, 728, 729, 760 & 761)	MD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Well:	W Lybrook Unit No. 761H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Dec2220_v16

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,330.00	19.25	255.65	4,142.34	-1,024.64	-187.32	-592.07	9.47	0.69	28.84
4,362.00	21.18	264.96	4,172.37	-1,026.46	-198.20	-585.67	11.71	6.03	29.09
4,393.00	22.76	272.52	4,201.13	-1,026.69	-209.77	-577.65	10.44	5.10	24.39
4,425.00	23.73	277.00	4,230.53	-1,025.63	-222.34	-568.01	6.30	3.03	14.00
4,456.00	25.97	281.40	4,258.66	-1,023.53	-235.19	-557.44	9.37	7.23	14.19
4,488.00	28.48	284.91	4,287.11	-1,020.18	-249.44	-545.00	9.31	7.84	10.97
4,519.00	30.59	287.55	4,314.09	-1,015.90	-264.10	-531.60	8.00	6.81	8.52
4,551.00	32.87	290.36	4,341.30	-1,010.42	-280.01	-516.48	8.49	7.13	8.78
4,582.00	35.60	292.21	4,366.93	-1,004.08	-296.25	-500.51	9.42	8.81	5.97
4,614.00	38.58	293.35	4,392.45	-996.61	-314.04	-482.65	9.56	9.31	3.56
4,646.00	41.97	294.67	4,416.86	-988.18	-332.93	-463.33	10.92	10.59	4.13
4,677.00	45.22	295.64	4,439.31	-979.09	-352.27	-443.23	10.70	10.48	3.13
4,709.00	48.30	296.07	4,461.23	-968.93	-373.25	-421.21	9.67	9.63	1.34
4,740.00	51.64	297.83	4,481.17	-958.16	-394.40	-398.64	11.62	10.77	5.68
4,772.00	54.23	301.08	4,500.46	-945.60	-416.62	-374.04	11.45	8.09	10.16
4,804.00	56.69	303.99	4,518.60	-931.42	-438.83	-348.31	10.73	7.69	9.09
4,835.00	58.58	305.92	4,535.20	-916.41	-460.29	-322.53	8.05	6.10	6.23
4,844.22	58.67	305.92	4,540.00	-911.79	-466.66	-314.75	0.97	0.97	0.00
FTP MDCS_G top @ 4844 MD									
4,867.00	58.89	305.92	4,551.81	-900.37	-482.44	-295.52	0.97	0.97	0.00
4,898.00	60.12	306.01	4,567.54	-884.68	-504.06	-269.14	3.98	3.97	0.29
4,930.00	64.03	306.09	4,582.52	-868.04	-526.91	-241.22	12.22	12.22	0.25
4,961.00	67.50	307.06	4,595.24	-851.20	-549.61	-213.26	11.55	11.19	3.13
4,993.00	70.93	308.03	4,606.60	-832.97	-573.32	-183.60	11.09	10.72	3.03
5,024.00	74.14	309.26	4,615.90	-814.50	-596.41	-154.21	11.02	10.35	3.97
5,056.00	76.73	309.61	4,623.95	-794.83	-620.33	-123.39	8.16	8.09	1.09
5,087.00	79.06	309.79	4,630.45	-775.47	-643.65	-93.21	7.54	7.52	0.58
5,118.00	81.21	310.14	4,635.76	-755.85	-667.06	-62.79	7.02	6.94	1.13
5,150.00	83.32	311.54	4,640.06	-735.12	-691.04	-31.17	7.89	6.59	4.38
5,181.00	85.87	312.51	4,642.98	-714.46	-713.97	-0.35	8.80	8.23	3.13
5,275.00	88.77	313.12	4,647.38	-650.65	-782.84	93.47	3.15	3.09	0.65
5,370.00	89.56	312.51	4,648.76	-586.09	-852.52	188.39	1.05	0.83	-0.64
5,464.00	87.58	313.13	4,651.11	-522.23	-921.44	282.29	2.21	-2.11	0.66
5,558.00	87.19	313.13	4,655.40	-458.03	-989.97	376.14	0.41	-0.41	0.00
5,653.00	87.54	311.90	4,659.77	-393.90	-1,059.92	470.95	1.34	0.37	-1.29
5,747.00	88.77	315.85	4,662.79	-328.80	-1,127.63	564.86	4.40	1.31	4.20
5,841.00	90.40	315.06	4,663.47	-261.81	-1,193.56	658.85	1.93	1.73	-0.84
5,936.00	90.57	313.92	4,662.67	-195.24	-1,261.33	753.84	1.21	0.18	-1.20
6,031.00	90.04	316.99	4,662.16	-127.54	-1,327.96	848.83	3.28	-0.56	3.23
6,125.00	90.57	315.76	4,661.66	-59.50	-1,392.81	942.80	1.42	0.56	-1.31
6,219.00	91.19	314.80	4,660.22	7.29	-1,458.95	1,036.78	1.22	0.66	-1.02
6,314.00	87.01	315.15	4,661.71	74.41	-1,526.13	1,131.75	4.42	-4.40	0.37
6,409.00	87.19	314.97	4,666.52	141.57	-1,593.15	1,226.63	0.27	0.19	-0.19



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well W Lybrook Unit No. 761H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Site:	W Lybrook 726 Pad (726, 728, 729, 760 & 761)	MD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Well:	W Lybrook Unit No. 761H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Dec2220_v16

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
6,503.00	89.30	315.24	4,669.40	208.12	-1,659.46	1,320.58	2.26	2.24	0.29	
6,598.00	89.38	313.57	4,670.49	274.59	-1,727.32	1,415.56	1.76	0.08	-1.76	
6,692.00	89.74	313.74	4,671.21	339.48	-1,795.33	1,509.53	0.42	0.38	0.18	
6,787.00	90.04	313.13	4,671.40	404.79	-1,864.31	1,604.50	0.72	0.32	-0.64	
6,882.00	90.40	311.28	4,671.03	468.61	-1,934.68	1,699.38	1.98	0.38	-1.95	
6,976.00	89.43	312.51	4,671.17	531.38	-2,004.65	1,793.24	1.67	-1.03	1.31	
7,070.00	89.30	314.27	4,672.21	595.94	-2,072.95	1,887.19	1.88	-0.14	1.87	
7,165.00	89.96	317.34	4,672.83	664.05	-2,139.16	1,982.17	3.31	0.69	3.23	
7,259.00	90.66	317.08	4,672.32	733.03	-2,203.02	2,076.10	0.79	0.74	-0.28	
7,353.00	91.05	316.64	4,670.91	801.61	-2,267.29	2,170.04	0.63	0.41	-0.47	
7,447.00	91.58	316.20	4,668.76	869.69	-2,332.07	2,263.98	0.73	0.56	-0.47	
7,541.00	92.20	316.38	4,665.66	937.60	-2,396.99	2,357.91	0.69	0.66	0.19	
7,636.00	88.99	315.06	4,664.67	1,005.60	-2,463.30	2,452.88	3.65	-3.38	-1.39	
7,730.00	89.03	315.15	4,666.29	1,072.18	-2,529.64	2,546.87	0.10	0.04	0.10	
7,825.00	89.65	313.65	4,667.39	1,138.64	-2,597.50	2,641.85	1.71	0.65	-1.58	
7,919.00	87.50	316.03	4,669.73	1,204.89	-2,664.13	2,735.81	3.41	-2.29	2.53	
8,013.00	87.71	316.03	4,673.66	1,272.48	-2,729.34	2,829.71	0.22	0.22	0.00	
8,107.00	88.51	316.11	4,676.76	1,340.14	-2,794.51	2,923.64	0.86	0.85	0.09	
8,201.00	89.08	316.29	4,678.73	1,407.97	-2,859.56	3,017.60	0.64	0.61	0.19	
8,296.00	89.87	315.94	4,679.60	1,476.44	-2,925.41	3,112.58	0.91	0.83	-0.37	
8,390.00	90.75	315.67	4,679.09	1,543.83	-2,990.94	3,206.57	0.98	0.94	-0.29	
8,485.00	91.58	314.80	4,677.16	1,611.27	-3,057.82	3,301.55	1.27	0.87	-0.92	
8,578.00	91.80	312.16	4,674.42	1,675.23	-3,125.27	3,394.46	2.85	0.24	-2.84	
8,672.00	89.87	315.06	4,673.05	1,740.05	-3,193.31	3,488.41	3.71	-2.05	3.09	
8,768.00	89.43	314.53	4,673.64	1,807.68	-3,261.44	3,584.41	0.72	-0.46	-0.55	
8,862.00	89.17	313.83	4,674.78	1,873.19	-3,328.84	3,678.39	0.79	-0.28	-0.74	
8,956.00	88.99	313.21	4,676.29	1,937.91	-3,397.00	3,772.35	0.69	-0.19	-0.66	
9,051.00	89.25	313.21	4,677.75	2,002.95	-3,466.23	3,867.29	0.27	0.27	0.00	
9,145.00	89.82	313.57	4,678.52	2,067.52	-3,534.53	3,961.25	0.72	0.61	0.38	
9,240.00	89.38	312.51	4,679.18	2,132.35	-3,603.97	4,056.19	1.21	-0.46	-1.12	
9,334.00	89.56	314.27	4,680.05	2,196.92	-3,672.27	4,150.14	1.88	0.19	1.87	
9,428.00	88.64	312.07	4,681.52	2,261.22	-3,740.81	4,244.08	2.54	-0.98	-2.34	
9,523.00	89.56	316.29	4,683.02	2,327.40	-3,808.92	4,339.03	4.55	0.97	4.44	
9,617.00	89.43	315.24	4,683.85	2,394.75	-3,874.49	4,433.02	1.13	-0.14	-1.12	
9,712.00	89.47	314.09	4,684.76	2,461.53	-3,942.05	4,528.01	1.21	0.04	-1.21	
9,806.00	89.12	316.73	4,685.91	2,528.46	-4,008.03	4,622.00	2.83	-0.37	2.81	
9,901.00	89.17	315.76	4,687.33	2,597.07	-4,073.72	4,716.96	1.02	0.05	-1.02	
9,995.00	89.78	316.64	4,688.19	2,664.91	-4,138.78	4,810.94	1.14	0.65	0.94	
10,090.00	89.96	316.47	4,688.41	2,733.88	-4,204.11	4,905.90	0.26	0.19	-0.18	
10,184.00	89.43	315.67	4,688.91	2,801.58	-4,269.32	4,999.88	1.02	-0.56	-0.85	
10,278.00	89.60	316.82	4,689.71	2,869.47	-4,334.33	5,093.85	1.24	0.18	1.22	
10,372.00	89.60	317.17	4,690.36	2,938.21	-4,398.44	5,187.79	0.37	0.00	0.37	
10,467.00	89.69	317.34	4,690.95	3,007.98	-4,462.92	5,282.72	0.20	0.09	0.18	



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well W Lybrook Unit No. 761H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Site:	W Lybrook 726 Pad (726, 728, 729, 760 & 761)	MD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Well:	W Lybrook Unit No. 761H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Dec2220_v16

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N-S (ft)	+E-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
10,561.00	89.52	317.78	4,691.60	3,077.35	-4,526.35	5,376.62	0.50	-0.18	0.47	
10,655.00	89.74	318.40	4,692.21	3,147.30	-4,589.13	5,470.48	0.70	0.23	0.66	
10,749.00	90.22	314.44	4,692.24	3,215.38	-4,653.92	5,564.44	4.24	0.51	-4.21	
10,843.00	90.13	314.00	4,691.95	3,280.94	-4,721.29	5,658.43	0.48	-0.10	-0.47	
10,938.00	90.13	313.30	4,691.74	3,346.51	-4,790.03	5,753.40	0.74	0.00	-0.74	
11,031.00	89.96	312.42	4,691.66	3,409.77	-4,858.20	5,846.33	0.96	-0.18	-0.95	
11,125.00	87.85	314.80	4,693.46	3,474.58	-4,926.24	5,940.28	3.38	-2.24	2.53	
11,220.00	88.33	314.09	4,696.63	3,541.07	-4,994.02	6,035.22	0.90	0.51	-0.75	
11,314.00	88.68	312.86	4,699.08	3,605.72	-5,062.21	6,129.15	1.36	0.37	-1.31	
11,409.00	88.90	316.47	4,701.08	3,672.47	-5,129.75	6,224.11	3.81	0.23	3.80	
11,504.00	89.21	314.71	4,702.65	3,740.33	-5,196.22	6,319.09	1.88	0.33	-1.85	
11,598.00	89.78	314.97	4,703.48	3,806.61	-5,262.87	6,413.09	0.67	0.61	0.28	
11,692.00	90.40	315.76	4,703.33	3,873.49	-5,328.91	6,507.08	1.07	0.66	0.84	
11,786.00	90.48	314.71	4,702.61	3,940.23	-5,395.10	6,601.08	1.12	0.09	-1.12	
11,881.00	88.02	314.18	4,703.85	4,006.74	-5,462.91	6,696.06	2.65	-2.59	-0.56	
11,975.00	88.51	313.83	4,706.70	4,072.02	-5,530.50	6,790.00	0.64	0.52	-0.37	
12,069.00	87.58	315.41	4,709.91	4,138.00	-5,597.36	6,883.94	1.95	-0.99	1.68	
12,163.00	88.20	315.94	4,713.37	4,205.20	-5,663.00	6,977.87	0.87	0.66	0.56	
12,258.00	88.33	315.41	4,716.24	4,273.13	-5,729.34	7,072.82	0.57	0.14	-0.56	
12,352.00	88.90	315.67	4,718.52	4,340.20	-5,795.16	7,166.79	0.67	0.61	0.28	
12,447.00	88.33	313.57	4,720.81	4,406.91	-5,862.76	7,261.75	2.29	-0.60	-2.21	
12,541.00	88.24	312.51	4,723.63	4,471.03	-5,931.43	7,355.65	1.13	-0.10	-1.13	
12,635.00	88.24	311.63	4,726.51	4,533.99	-6,001.17	7,449.48	0.94	0.00	-0.94	
12,668.00	88.26	311.39	4,727.52	4,555.85	-6,025.88	7,482.41	0.74	0.05	-0.74	
LTP @ 12668.00 MD 4727.52 TVD										
12,686.00	88.27	311.25	4,728.07	4,567.73	-6,039.39	7,500.36	0.74	0.05	-0.74	
330 perp @ 12686 MD 4728 TVD										
12,730.00	88.29	310.93	4,729.39	4,596.63	-6,072.53	7,544.24	0.74	0.05	-0.74	
Survey @ 12730.00 MD 4729.39 TVD										
12,833.00	88.29	310.93	4,732.46	4,664.08	-6,150.32	7,646.93	0.00	0.00	0.00	
Survey Proj. to 12833.00 MD 4732.46 TVD										

Design Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment	
		+N/-S (ft)	+E/-W (ft)		
431.00	430.92	5.72	4.21	MWD surveys	
2,677.00	2,602.37	-448.98	-88.31	9 5/8" Csg @ 2677.00 MD 2602.37 TVD	
4,844.22	4,540.00	-911.79	-466.66	FTP MDCS_G top @ 4844 MD	
12,668.00	4,727.52	4,555.85	-6,025.88	LTP @ 12668.00 MD 4727.52 TVD	
12,686.00	4,728.07	4,567.73	-6,039.39	330 perp @ 12686 MD 4728 TVD	
12,730.00	4,729.39	4,596.63	-6,072.53	Survey @ 12730.00 MD 4729.39 TVD	
12,833.00	4,732.46	4,664.08	-6,150.32	Survey Proj. to 12833.00 MD 4732.46 TVD	



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well W Lybrook Unit No. 761H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Site:	W Lybrook 726 Pad (726, 728, 729, 760 & 761)	MD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Well:	W Lybrook Unit No. 761H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Dec2220_v16

Project	San Juan County, New Mexico NAD83 NM W		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site	W Lybrook 726 Pad (726, 728, 729, 760 & 761)		
Site Position:		Northing:	438,940.217 usft
From:	Lat/Long	Easting:	2,744,242.772 usft
Position Uncertainty:	0.00 ft	Slot Radius:	13-3/16 "
		Latitude:	32.206696000
		Longitude:	-107.764948000
		Grid Convergence:	0.04 °

Well	W Lybrook Unit No. 761H, Surf loc: 495 FSL 561 FWL Section 23-T23N-R09W		
Well Position	+N/-S	0.00 ft	Northing: 1,894,475.367 usft
	+E/-W	0.00 ft	Easting: 2,743,191.974 usft
Position Uncertainty	0.00 ft	Wellhead Elevation:	ft
		Latitude:	36.206513000
		Longitude:	-107.765200000
		Ground Level:	6,747.00 ft

Wellbore	Original Hole				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	1/14/2022	8.75	62.72	49,234.19269728

Design	Surveys Original Hole				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.00	0.00	0.00		315.00

Survey Program	Date	2/10/2022			
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
431.00	2,637.00	MWD surf (Original Hole)	MWD	OWSG MWD - Standard	
2,703.00	12,730.00	MWD (Original Hole)	MWD	OWSG MWD - Standard	
12,833.00	12,833.00	Projection (Original Hole)	MWD	OWSG MWD - Standard	

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
0.00	0.00	0.00	0.00	0.00	0.00	1,894,475.367	2,743,191.974	36.206513000	-107.765200000	
431.00	1.89	36.36	430.92	5.72	4.21	1,894,481.091	2,743,196.188	36.206528717	-107.765185702	
MWD surveys										
493.00	2.02	37.94	492.89	7.41	5.49	1,894,482.776	2,743,197.466	36.206533343	-107.765181366	
584.00	0.79	34.95	583.86	9.19	6.84	1,894,484.555	2,743,198.812	36.206538228	-107.765176801	
675.00	0.31	26.78	674.85	9.92	7.31	1,894,485.289	2,743,199.282	36.206540243	-107.765175205	
766.00	0.31	79.51	765.85	10.19	7.66	1,894,485.554	2,743,199.635	36.206540970	-107.765174008	
857.00	0.70	258.28	856.85	10.12	7.36	1,894,485.486	2,743,199.333	36.206540783	-107.765175033	
948.00	1.14	225.85	947.84	9.38	6.16	1,894,484.742	2,743,198.139	36.206538743	-107.765179081	
1,039.00	3.16	207.74	1,038.77	6.52	4.35	1,894,481.892	2,743,196.322	36.206530915	-107.765185248	



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well W Lybrook Unit No. 761H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Site:	W Lybrook 726 Pad (726, 728, 729, 760 & 761)	MD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Well:	W Lybrook Unit No. 761H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Dec2220_v16

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
1,129.00	6.94	200.54	1,128.41	-0.77	1.28	1,894,474.602	2,743,193.258	36.206510895	-107.765195649
1,224.00	8.04	200.45	1,222.59	-12.37	-3.05	1,894,463.002	2,743,188.923	36.206479038	-107.765210371
1,318.00	9.58	196.32	1,315.48	-26.03	-7.55	1,894,449.335	2,743,184.428	36.206441502	-107.765225640
1,412.00	11.51	190.52	1,407.89	-42.76	-11.46	1,894,432.606	2,743,180.517	36.206395552	-107.765238936
1,506.00	13.89	190.87	1,499.59	-63.07	-15.30	1,894,412.302	2,743,176.677	36.206339782	-107.765252003
1,600.00	16.88	190.25	1,590.21	-87.58	-19.85	1,894,387.786	2,743,172.120	36.206272445	-107.765267508
1,693.00	20.17	190.69	1,678.38	-116.63	-25.23	1,894,358.736	2,743,166.741	36.206192653	-107.765285808
1,787.00	19.82	190.34	1,766.71	-148.23	-31.10	1,894,327.134	2,743,160.875	36.206105850	-107.765305768
1,882.00	20.43	191.05	1,855.91	-180.35	-37.17	1,894,295.017	2,743,154.806	36.206017632	-107.765326416
1,975.00	20.26	190.69	1,943.11	-212.10	-43.27	1,894,263.264	2,743,148.708	36.205930415	-107.765347160
2,070.00	19.78	191.40	2,032.37	-244.02	-49.49	1,894,231.344	2,743,142.480	36.205842739	-107.765368348
2,165.00	19.86	191.22	2,121.74	-275.61	-55.81	1,894,199.758	2,743,136.163	36.205755982	-107.765389836
2,259.00	20.79	190.96	2,209.89	-307.65	-62.09	1,894,167.717	2,743,129.884	36.205667975	-107.765411194
2,354.00	20.96	190.52	2,298.65	-340.91	-68.40	1,894,134.459	2,743,123.576	36.205576624	-107.765432654
2,448.00	20.39	191.13	2,386.60	-373.51	-74.63	1,894,101.862	2,743,117.346	36.205487087	-107.765453851
2,542.00	19.20	190.17	2,475.04	-404.79	-80.52	1,894,070.579	2,743,111.455	36.205401163	-107.765473891
2,637.00	19.51	190.08	2,564.67	-435.78	-86.05	1,894,039.585	2,743,105.921	36.205316029	-107.765492725
2,677.00	19.59	189.33	2,602.37	-448.98	-88.31	1,894,026.392	2,743,103.664	36.205279792	-107.765500405
9 5/8" Csg @ 2677.00 MD 2602.37 TVD									
2,703.00	19.64	188.85	2,626.86	-457.59	-89.69	1,894,017.774	2,743,102.285	36.205256120	-107.765505100
2,797.00	22.46	190.08	2,714.58	-490.89	-95.26	1,893,984.480	2,743,096.711	36.205164667	-107.765524073
2,891.00	22.98	188.06	2,801.28	-526.74	-100.98	1,893,948.632	2,743,090.996	36.205066202	-107.765543531
3,007.00	23.47	188.67	2,907.88	-571.99	-107.64	1,893,903.376	2,743,084.338	36.204941892	-107.765566203
3,101.00	23.82	186.30	2,993.99	-609.36	-112.54	1,893,866.004	2,743,079.434	36.204839235	-107.765582917
3,196.00	23.64	185.07	3,080.96	-647.40	-116.33	1,893,827.963	2,743,075.645	36.204734742	-107.765595848
3,291.00	23.12	184.54	3,168.16	-684.97	-119.49	1,893,790.398	2,743,072.486	36.204631552	-107.765606646
3,385.00	22.68	184.28	3,254.75	-721.44	-122.30	1,893,753.929	2,743,069.672	36.204531373	-107.765616268
3,479.00	21.45	184.72	3,341.87	-756.64	-125.07	1,893,718.727	2,743,066.906	36.204434675	-107.765625730
3,573.00	20.43	183.84	3,429.66	-790.14	-127.58	1,893,685.228	2,743,064.393	36.204342654	-107.765634328
3,668.00	21.62	187.27	3,518.33	-824.05	-130.91	1,893,651.321	2,743,061.067	36.204249516	-107.765645679
3,763.00	20.87	185.86	3,606.88	-858.24	-134.85	1,893,617.127	2,743,057.125	36.204155588	-107.765659124
3,858.00	19.42	185.68	3,696.06	-890.79	-138.14	1,893,584.576	2,743,053.834	36.204066174	-107.765670355
3,952.00	19.12	185.77	3,784.80	-921.66	-141.23	1,893,553.709	2,743,050.739	36.203981385	-107.765680917
4,047.00	19.64	187.09	3,874.41	-952.98	-144.77	1,893,522.386	2,743,047.205	36.203895344	-107.765692972
4,078.00	19.03	186.21	3,903.67	-963.18	-145.96	1,893,512.191	2,743,046.015	36.203867341	-107.765697029
4,109.00	18.41	184.54	3,933.03	-973.08	-146.89	1,893,502.287	2,743,045.081	36.203840135	-107.765700219
4,141.00	18.11	186.91	3,963.42	-983.06	-147.89	1,893,492.312	2,743,044.082	36.203812736	-107.765703626
4,172.00	18.02	200.36	3,992.90	-992.34	-150.14	1,893,483.030	2,743,041.833	36.203787240	-107.765711271
4,204.00	18.63	211.52	4,023.29	-1,001.34	-154.54	1,893,474.030	2,743,037.438	36.203762524	-107.765726191
4,235.00	19.25	223.21	4,052.62	-1,009.29	-160.63	1,893,466.081	2,743,031.348	36.203740700	-107.765746852
4,267.00	19.47	234.55	4,082.82	-1,016.23	-168.59	1,893,459.141	2,743,023.389	36.203721649	-107.765773845
4,298.00	19.03	246.42	4,112.10	-1,021.25	-177.43	1,893,454.121	2,743,014.545	36.203707875	-107.765803834
4,330.00	19.25	255.65	4,142.34	-1,024.64	-187.32	1,893,450.725	2,743,004.651	36.203698568	-107.765837379
4,362.00	21.18	264.96	4,172.37	-1,026.46	-198.20	1,893,448.910	2,742,993.778	36.203693600	-107.765874237
4,393.00	22.76	272.52	4,201.13	-1,026.69	-209.77	1,893,448.681	2,742,982.206	36.203692995	-107.765913462
4,425.00	23.73	277.00	4,230.53	-1,025.63	-222.34	1,893,449.738	2,742,969.630	36.203695922	-107.765956087
4,456.00	25.97	281.40	4,258.66	-1,023.53	-235.19	1,893,451.840	2,742,956.782	36.203701722	-107.765999629
4,488.00	28.48	284.91	4,287.11	-1,020.18	-249.44	1,893,455.189	2,742,942.538	36.203710948	-107.766047902
4,519.00	30.59	287.55	4,314.09	-1,015.90	-264.10	1,893,459.470	2,742,927.873	36.203722736	-107.766097600
4,551.00	32.87	290.36	4,341.30	-1,010.42	-280.01	1,893,464.947	2,742,911.966	36.203737814	-107.766151507
4,582.00	35.60	292.21	4,366.93	-1,004.08	-296.25	1,893,471.286	2,742,895.722	36.203755258	-107.766206551
4,614.00	38.58	293.35	4,392.45	-996.61	-314.04	1,893,478.763	2,742,877.934	36.203775832	-107.766266825
4,646.00	41.97	294.67	4,416.86	-988.18	-332.93	1,893,487.187	2,742,859.045	36.203799007	-107.766330833
4,677.00	45.22	295.64	4,439.31	-979.09	-352.27	1,893,496.276	2,742,839.701	36.203824015	-107.766396377
4,709.00	48.30	296.07	4,461.23	-968.93	-373.25	1,893,506.443	2,742,818.726	36.203851984	-107.766467448



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well W Lybrook Unit No. 761H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Site:	W Lybrook 726 Pad (726, 728, 729, 760 & 761)	MD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Well:	W Lybrook Unit No. 761H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Dec2220_v16

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
4,740.00	51.64	297.83	4,481.17	-958.16	-394.40	1,893,517.207	2,742,797.576	36.203881592	-107.766539114
4,772.00	54.23	301.08	4,500.46	-945.60	-416.62	1,893,529.770	2,742,775.355	36.203916146	-107.766614403
4,804.00	56.69	303.99	4,518.60	-931.42	-438.83	1,893,543.951	2,742,753.144	36.203955145	-107.766689657
4,835.00	58.58	305.92	4,535.20	-916.41	-460.29	1,893,558.955	2,742,731.688	36.203996403	-107.766762347
4,844.22	58.67	305.92	4,540.00	-911.79	-466.66	1,893,563.575	2,742,725.310	36.204009107	-107.766783954
FTP MDCS_G top @ 4844 MD									
4,867.00	58.89	305.92	4,551.81	-900.37	-482.44	1,893,575.001	2,742,709.537	36.204040526	-107.766837392
4,898.00	60.12	306.01	4,567.54	-884.68	-504.06	1,893,590.689	2,742,687.917	36.204083662	-107.766910636
4,930.00	64.03	306.09	4,582.52	-868.04	-526.91	1,893,607.325	2,742,665.062	36.204129405	-107.766988066
4,961.00	67.50	307.06	4,595.24	-851.20	-549.61	1,893,624.169	2,742,642.367	36.204175720	-107.767064955
4,993.00	70.93	308.03	4,606.60	-832.97	-573.32	1,893,642.399	2,742,618.652	36.204225845	-107.767145296
5,024.00	74.14	309.26	4,615.90	-814.50	-596.41	1,893,660.865	2,742,595.561	36.204276617	-107.767223520
5,056.00	76.73	309.61	4,623.95	-794.83	-620.33	1,893,680.537	2,742,571.643	36.204330702	-107.767304548
5,087.00	79.06	309.79	4,630.45	-775.47	-643.65	1,893,699.898	2,742,548.324	36.204383930	-107.767383545
5,118.00	81.21	310.14	4,635.76	-755.85	-667.06	1,893,719.514	2,742,524.917	36.204437863	-107.767462838
5,150.00	83.32	311.54	4,640.06	-735.12	-691.04	1,893,740.249	2,742,500.931	36.204494868	-107.767544094
5,181.00	85.87	312.51	4,642.98	-714.46	-713.97	1,893,760.908	2,742,478.008	36.204551664	-107.767621747
5,275.00	88.77	313.12	4,647.38	-650.65	-782.84	1,893,824.717	2,742,409.137	36.204727081	-107.767855043
5,370.00	89.56	312.51	4,648.76	-586.09	-852.52	1,893,889.274	2,742,339.458	36.204904556	-107.768091079
5,464.00	87.58	313.13	4,651.11	-522.23	-921.44	1,893,953.142	2,742,270.535	36.205080134	-107.768324555
5,558.00	87.19	313.13	4,655.40	-458.03	-989.97	1,894,017.339	2,742,202.005	36.205256614	-107.768556699
5,653.00	87.54	311.90	4,659.77	-393.90	-1,059.92	1,894,081.469	2,742,132.056	36.205432914	-107.768793654
5,747.00	88.77	315.85	4,662.79	-328.80	-1,127.63	1,894,146.572	2,742,064.347	36.205611881	-107.769023017
5,841.00	90.40	315.06	4,663.47	-261.81	-1,193.56	1,894,213.561	2,741,998.413	36.205796027	-107.769246357
5,936.00	90.57	313.92	4,662.67	-195.24	-1,261.33	1,894,280.132	2,741,930.647	36.205979026	-107.769475913
6,031.00	90.04	316.99	4,662.16	-127.54	-1,327.96	1,894,347.829	2,741,864.016	36.206165117	-107.769701615
6,125.00	90.57	315.76	4,661.66	-59.50	-1,392.81	1,894,415.870	2,741,799.165	36.206352150	-107.769921287
6,219.00	91.19	314.80	4,660.22	7.29	-1,458.95	1,894,482.653	2,741,733.032	36.206535728	-107.770145309
6,314.00	87.01	315.15	4,661.71	74.41	-1,526.13	1,894,549.775	2,741,665.850	36.206720239	-107.770372883
6,409.00	87.19	314.97	4,666.52	141.57	-1,593.15	1,894,616.934	2,741,598.832	36.206904852	-107.770599907
6,503.00	89.30	315.24	4,669.40	208.12	-1,659.46	1,894,683.489	2,741,532.521	36.207087801	-107.770824535
6,598.00	89.38	313.57	4,670.49	274.59	-1,727.32	1,894,749.956	2,741,464.659	36.207270513	-107.771054422
6,692.00	89.74	313.74	4,671.21	339.48	-1,795.33	1,894,814.843	2,741,396.651	36.207448884	-107.771284806
6,787.00	90.04	313.13	4,671.40	404.79	-1,864.31	1,894,880.158	2,741,327.667	36.207628432	-107.771518501
6,882.00	90.40	311.28	4,671.03	468.61	-1,934.68	1,894,943.974	2,741,257.300	36.207803864	-107.771756887
6,976.00	89.43	312.51	4,671.17	531.38	-2,004.65	1,895,006.742	2,741,187.332	36.207976415	-107.771993926
7,070.00	89.30	314.27	4,672.21	595.94	-2,072.95	1,895,071.310	2,741,119.029	36.208153907	-107.772225314
7,165.00	89.96	317.34	4,672.83	664.05	-2,139.16	1,895,139.412	2,741,052.815	36.208341105	-107.772449620
7,259.00	90.66	317.08	4,672.32	733.03	-2,203.02	1,895,208.392	2,740,988.961	36.208530710	-107.772665922
7,353.00	91.05	316.64	4,670.91	801.61	-2,267.29	1,895,276.975	2,740,924.693	36.208719223	-107.772883630
7,447.00	91.58	316.20	4,668.76	869.69	-2,332.07	1,895,345.051	2,740,859.910	36.208906346	-107.773103085
7,541.00	92.20	316.38	4,665.66	937.60	-2,396.99	1,895,412.961	2,740,794.991	36.209093012	-107.773323003
7,636.00	88.99	315.06	4,664.67	1,005.60	-2,463.30	1,895,480.961	2,740,728.679	36.209279926	-107.773547644
7,730.00	89.03	315.15	4,666.29	1,072.18	-2,529.64	1,895,547.540	2,740,662.343	36.209462939	-107.773772370
7,825.00	89.65	313.65	4,667.39	1,138.64	-2,597.50	1,895,614.001	2,740,594.475	36.209645629	-107.774002291
7,919.00	87.50	316.03	4,669.73	1,204.89	-2,664.13	1,895,680.254	2,740,527.850	36.209827742	-107.774227998
8,013.00	87.71	316.03	4,673.66	1,272.48	-2,729.34	1,895,747.847	2,740,462.645	36.210013535	-107.774448893
8,107.00	88.51	316.11	4,676.76	1,340.14	-2,794.51	1,895,815.507	2,740,397.466	36.210199512	-107.774669699
8,201.00	89.08	316.29	4,678.73	1,407.97	-2,859.56	1,895,883.337	2,740,332.419	36.210385956	-107.774890057
8,296.00	89.87	315.94	4,679.60	1,476.44	-2,925.41	1,895,951.803	2,740,266.567	36.210574147	-107.775113144
8,390.00	90.75	315.67	4,679.09	1,543.83	-2,990.94	1,896,019.196	2,740,201.041	36.210759392	-107.775335130
8,485.00	91.58	314.80	4,677.16	1,611.27	-3,057.82	1,896,086.631	2,740,134.158	36.210944751	-107.775561719
8,578.00	91.80	312.16	4,674.42	1,675.23	-3,125.27	1,896,150.591	2,740,066.711	36.211120565	-107.775790225
8,672.00	89.87	315.06	4,673.05	1,740.05	-3,193.31	1,896,215.410	2,739,998.668	36.211298742	-107.776020750
8,768.00	89.43	314.53	4,673.64	1,807.68	-3,261.44	1,896,283.048	2,739,930.546	36.211484658	-107.776251543



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well W Lybrook Unit No. 761H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Site:	W Lybrook 726 Pad (726, 728, 729, 760 & 761)	MD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Well:	W Lybrook Unit No. 761H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Dec2220_v16

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
8,862.00	89.17	313.83	4,674.78	1,873.19	-3,328.84	1,896,348.552	2,739,863.139	36.211664714	-107.776479914
8,956.00	88.99	313.21	4,676.29	1,937.91	-3,397.00	1,896,413.272	2,739,794.986	36.211842616	-107.776710818
9,051.00	89.25	313.21	4,677.75	2,002.95	-3,466.23	1,896,478.309	2,739,725.753	36.212021388	-107.776945380
9,145.00	89.82	313.57	4,678.52	2,067.52	-3,534.53	1,896,542.880	2,739,657.447	36.212198881	-107.777176805
9,240.00	89.38	312.51	4,679.18	2,132.35	-3,603.97	1,896,607.716	2,739,588.016	36.212377101	-107.777412041
9,334.00	89.56	314.27	4,680.05	2,196.92	-3,672.27	1,896,672.285	2,739,519.713	36.212554586	-107.777643459
9,428.00	88.64	312.07	4,681.52	2,261.22	-3,740.81	1,896,736.584	2,739,451.170	36.212731329	-107.777875690
9,523.00	89.56	316.29	4,683.02	2,327.40	-3,808.92	1,896,802.767	2,739,383.065	36.212913248	-107.778106432
9,617.00	89.43	315.24	4,683.85	2,394.75	-3,874.49	1,896,870.113	2,739,317.494	36.213098356	-107.778328585
9,712.00	89.47	314.09	4,684.76	2,461.53	-3,942.05	1,896,936.890	2,739,249.932	36.213281903	-107.778557490
9,806.00	89.12	316.73	4,685.91	2,528.46	-4,008.03	1,897,003.820	2,739,183.952	36.213465870	-107.778781031
9,901.00	89.17	315.76	4,687.33	2,597.07	-4,073.72	1,897,072.431	2,739,118.261	36.213654451	-107.779003592
9,995.00	89.78	316.64	4,688.19	2,664.91	-4,138.78	1,897,140.272	2,739,053.203	36.213840918	-107.779224007
10,090.00	89.96	316.47	4,688.41	2,733.88	-4,204.11	1,897,209.245	2,738,987.876	36.214030493	-107.779445335
10,184.00	89.43	315.67	4,688.91	2,801.58	-4,269.32	1,897,276.941	2,738,922.662	36.214216559	-107.779666281
10,278.00	89.60	316.82	4,689.71	2,869.47	-4,334.33	1,897,344.834	2,738,857.658	36.214403166	-107.779886520
10,372.00	89.60	317.17	4,690.36	2,938.21	-4,398.44	1,897,413.573	2,738,793.546	36.214592097	-107.780103732
10,467.00	89.69	317.34	4,690.95	3,007.98	-4,462.92	1,897,483.338	2,738,729.067	36.214783844	-107.780322186
10,561.00	89.52	317.78	4,691.60	3,077.35	-4,526.35	1,897,552.707	2,738,665.636	36.214974502	-107.780537091
10,655.00	89.74	318.40	4,692.21	3,147.30	-4,589.13	1,897,622.659	2,738,602.849	36.215166761	-107.780749811
10,749.00	90.22	314.44	4,692.24	3,215.38	-4,653.92	1,897,690.740	2,738,538.062	36.215353882	-107.780969317
10,843.00	90.13	314.00	4,691.95	3,280.94	-4,721.29	1,897,756.296	2,738,470.696	36.215534071	-107.781197572
10,938.00	90.13	313.30	4,691.74	3,346.51	-4,790.03	1,897,821.869	2,738,401.958	36.215714308	-107.781430480
11,031.00	89.96	312.42	4,691.66	3,409.77	-4,858.20	1,897,885.128	2,738,333.788	36.215888186	-107.781661466
11,125.00	87.85	314.80	4,693.46	3,474.58	-4,926.24	1,897,949.943	2,738,265.748	36.216066339	-107.781892009
11,220.00	88.33	314.09	4,696.63	3,541.07	-4,994.02	1,898,016.427	2,738,197.964	36.216249074	-107.782121684
11,314.00	88.68	312.86	4,699.08	3,605.72	-5,062.21	1,898,081.079	2,738,129.775	36.216426778	-107.782352735
11,409.00	88.90	316.47	4,701.08	3,672.47	-5,129.75	1,898,147.834	2,738,062.235	36.216610258	-107.782581584
11,504.00	89.21	314.71	4,702.65	3,740.33	-5,196.22	1,898,215.685	2,737,995.767	36.216796747	-107.782806797
11,598.00	89.78	314.97	4,703.48	3,806.61	-5,262.87	1,898,281.964	2,737,929.116	36.216978917	-107.783032633
11,692.00	90.40	315.76	4,703.33	3,873.49	-5,328.91	1,898,348.853	2,737,863.074	36.217162762	-107.783256406
11,786.00	90.48	314.71	4,702.61	3,940.23	-5,395.10	1,898,415.591	2,737,796.882	36.217346189	-107.783480689
11,881.00	88.02	314.18	4,703.85	4,006.74	-5,462.91	1,898,482.101	2,737,729.071	36.217528994	-107.783710462
11,975.00	88.51	313.83	4,706.70	4,072.02	-5,530.50	1,898,547.374	2,737,661.490	36.217708401	-107.783939458
12,069.00	87.58	315.41	4,709.91	4,138.00	-5,597.36	1,898,613.358	2,737,594.625	36.217889759	-107.784166029
12,163.00	88.20	315.94	4,713.37	4,205.20	-5,663.00	1,898,680.558	2,737,528.989	36.218074455	-107.784388427
12,258.00	88.33	315.41	4,716.24	4,273.13	-5,729.34	1,898,748.489	2,737,462.641	36.218261158	-107.784613243
12,352.00	88.90	315.67	4,718.52	4,340.20	-5,795.16	1,898,815.560	2,737,396.822	36.218445500	-107.784836267
12,447.00	88.33	313.57	4,720.81	4,406.91	-5,862.76	1,898,882.265	2,737,329.227	36.218628837	-107.785065314
12,541.00	88.24	312.51	4,723.63	4,471.03	-5,931.43	1,898,946.391	2,737,260.557	36.218805091	-107.785298013
12,635.00	88.24	311.63	4,726.51	4,533.99	-6,001.17	1,899,009.344	2,737,190.812	36.218978123	-107.785534356
12,668.00	88.26	311.39	4,727.52	4,555.85	-6,025.88	1,899,031.204	2,737,166.111	36.219038208	-107.785618060
LTP @ 12668.00 MD 4727.52 TVD									
12,686.00	88.27	311.25	4,728.07	4,567.73	-6,039.39	1,899,043.083	2,737,152.599	36.219070860	-107.785663850
330 perp @ 12686 MD 4728 TVD									
12,730.00	88.29	310.93	4,729.39	4,596.63	-6,072.53	1,899,071.990	2,737,119.453	36.219150314	-107.785776173
Survey @ 12730.00 MD 4729.39 TVD									
12,833.00	88.29	310.93	4,732.46	4,664.08	-6,150.32	1,899,139.439	2,737,041.670	36.219335707	-107.786039761
Survey Proj. to 12833.00 MD 4732.46 TVD									



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well W Lybrook Unit No. 761H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Site:	W Lybrook 726 Pad (726, 728, 729, 760 & 761)	MD Reference:	RKB=6747+28 @ 6775.00ft (Ensign 773)
Well:	W Lybrook Unit No. 761H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Dec2220_v16

Design Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
431.00	430.92	5.72	4.21	MWD surveys
2,677.00	2,602.37	-448.98	-88.31	9 5/8" Csg @ 2677.00 MD 2602.37 TVD
4,844.22	4,540.00	-911.79	-466.66	FTP MDCS_G top @ 4844 MD
12,668.00	4,727.52	4,555.85	-6,025.88	LTP @ 12668.00 MD 4727.52 TVD
12,686.00	4,728.07	4,567.73	-6,039.39	330 perp @ 12686 MD 4728 TVD
12,730.00	4,729.39	4,596.63	-6,072.53	Survey @ 12730.00 MD 4729.39 TVD
12,833.00	4,732.46	4,664.08	-6,150.32	Survey Proj. to 12833.00 MD 4732.46 TVD

WELL NAME: W LYBROOK UNIT 761H**OBJECTIVE: Drill, complete, and equip single lateral in the Mancos-I formation****API Number:** 30-045-38269**AFE Number:** DV03019**ER Well Number:** NM06445.01**State:** New Mexico**County:** San Juan**Surface Elev.:** 6,748 ft ASL (GL) 6,776 ft ASL (KB)**Surface Location:** 23-23N-09W Sec-Twn- Rng 495 ft FSL 561 ft FWL**BH Location:** 21-23N-09W Sec-Twn- Rng 234 ft FNL 182 ft FEL**Driving Directions:** **FROM THE INTERSECTION OF US HWY 550 & US HWY 64 IN BLOOMFIELD, NM:**

South on US Hwy 550 for 38.3 miles to MM 113.4, Right (Southwest) on CR #7890 for 0.8 miles to fork, Left (South) remaining on CR #7890 for 1.3 miles to 4-way intersection, Left (Southeast) remaining on CR #7890 for 0.6 miles to fork, Right (Southwest) on CR #7890 for 0.5 miles to fork, Right (West) exiting CR #7890 for 0.6 miles to fork, Left (West) for 0.7 miles to fork; Right (Northwest) for 0.2 miles onto W Lybrook Unit 726H Pad.

QUICK REFERENCE	
Sur TD (MD)	350 ft
Int TD (MD)	2,647 ft
KOP (MD)	4,146 ft
KOP (TVD)	3,972 ft
Target (TVD)	4,661 ft
Curve BUR	10 °/100 ft
POE (MD)	5,221 ft
TD (MD)	12,698 ft
Lat Len (ft)	7,477 ft

WELL CONSTRUCTION SUMMARY:

	Hole (in)	TD MD (ft)	Csg (in)	Csg (lb/ft)	Csg (grade)	Csg (conn)	Csg Top (ft)	Csg Bot (ft)
Surface	17.500	350	13.375	54.5	J-55	BTC	0	350
Intermediate	12.250	2,647	9.625	36.0	J-55	LTC	0	2,647
Production	8.500	12,698	5.500	17.0	P-110	LTC	0	12,698

CEMENT PROPERTIES SUMMARY:

	Type	Wt (ppg)	Yd (cuft/sk)	Wtr (gal/sk)	Hole Cap. (cuft/ft)	% Excess	TOC (ft MD)	Total (sx)
Surface	Type III	14.6	1.39	6.686	0.6946	100%	0	350
Inter. (Lead)	III:POZ Blend	12.5	2.14	12.05	0.3627	70%	0	506
Inter. (Tail)	Type III	14.6	1.38	6.64	0.3132	20%	2,147	136
Prod. (Lead)	Type I / II	12.4	2.360	13.4	0.2691	65%	0	599
Prod. (Tail)	G:POZ blend	13.3	1.560	7.7	0.2291	10%	3,739	1,447

COMPLETION / PRODUCTION SUMMARY:**Frac:** 35 plug-and-perf stages with 250,000 bbls slickwater fluid and 15,000,000 lbs of proppant (estimated)**Flowback:** Flow back through production tubing as pressures allow (ESP may be used for load recovery assistance)**Production:** Produce through production tubing via gas-lift into permanent production and storage facilities

Tops	TVD (ft KB)	MD (ft KB)
Ojo Alamo	335	335
Kirtland	440	440
Fruitland	645	645
Pictured Cliffs	1,035	1,035
Lewis	1,155	1,155
Chacra	1,415	14,187
Cliff House	2,453	2,522
Menefee	2,468	2,538
Point Lookout	3,441	3,579
Mancos	3,591	3,739
Gallup (MNCS_A)	3,915	4,085
MNCS_B	4,015	4,192
MNCS_C	4,102	4,283
MNCS_Cms	4,144	4,326
MNCS_D	4,271	4,464
MNCS_E	4,409	4,629
MNCS_F	4,467	4,708
MNCS_G	4,548	4,844
MNCS_H	4,587	4,923
FTP TARGET	4,661	5,221
LTP TARGET	4,718	12,698

This document will be submitted with the completion package after the well has been completed.

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 100974

ACKNOWLEDGMENTS

Operator: ENDURING RESOURCES, LLC 6300 S Syracuse Way, Suite 525 Centennial, CO 80111	OGRID: 372286
	Action Number: 100974
	Action Type: [C-104] Tight Hole Completion Packet (C-104CT)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 100974

CONDITIONS

Operator: ENDURING RESOURCES, LLC 6300 S Syracuse Way, Suite 525 Centennial, CO 80111	OGRID: 372286
	Action Number: 100974
	Action Type: [C-104] Tight Hole Completion Packet (C-104CT)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	None	8/8/2022