

District I
1625 N. French Dr., Hobbs, NM 88240

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104
Revised August 1, 2011

District II
811 S. First St., Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☒ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date: NW - 05/29/2022
⁴ API Number 30 - 015-48880	⁵ Pool Name PURPLE SAGE WOLFCAMP *NSL-8242	⁶ Pool Code 98220
⁷ Property Code: 329988	⁸ Property Name: TAILS CC 10-3 FEDERAL COM	⁹ Well Number: 32H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
N	10	24S	29E		220	SOUTH	1760	WEST	EDDY

¹¹ Bottom Hole Location FTP- 147' FSL 1018' FWL LTP- 185' FNL 991' FWL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L4	3	24S	29E		40	NORTH	988	WEST	EDDY
¹² Lse Code F	¹³ Producing Method Code : F	¹⁴ Gas Connection Date: 06/04/22	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
214754	LPC CRUDE OIL, INC.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 12/19/21	²² Ready Date 05/29/2022	²³ TD 20683'M 10085'V	²⁴ PBTD 20628'M 10084'V	²⁵ Perforations 10237-20537'	²⁶ DHC, MC
²⁷ Hole Size	²⁸ Casing & Tubing Size	²⁹ Depth Set	³⁰ Sacks Cement		
14-3/4"	10-3/4"	540'	515		
9-7/8"	7-5/8"	9455'	2285		
6-3/4"	5-1/2"	9326'-20655'	760		

V. Well Test Data

³¹ Date New Oil 06/04/2022	³² Gas Delivery Date 06/04/2022	³³ Test Date 07/08/2022	³⁴ Test Length 24 hrs	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 1343
³⁷ Choke Size 64/128	³⁸ Oil 4178	³⁹ Water 6969	⁴⁰ Gas 6967		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: 

Printed name: JANA MENDIOLA

Title: SR. REGULATORY ANALYST

E-mail Address:
Janalyn_mendiola@oxy.com

Date: 08/27/2022 Phone: 432-685-5936

OIL CONSERVATION DIVISION

Approved by:

Title: Petroleum Engineer

Approval Date: 09/20/22

COA: File 3160-4 Completion Report within 10 days to NMOCDD after BLM approval.

1625 N. French Dr., Hobbs, NM 88240
 Phone: (575) 393-6161 Fax: (575) 393-0720
District II
 811 S. First St., Artesia, NM 88210
 Phone: (575) 748-1283 Fax: (575) 748-9720
District III
 1000 Rio Brazos Road, Aztec, NM 87410
 Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505
 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
 Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

Revised August 1, 2011
 Submit one copy to appropriate
 District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-015-48880	² Pool Code 98220	³ Pool Name PURPLE SAGE; WOLFCAMP
⁴ Property Code 329988	Property Name TAILS CC 10_3 FED COM	
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC	⁶ Well Number 32H
		⁹ Elevation 2940'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	10	24S	29E		220	SOUTH	1760	WEST	EDDY
¹¹ Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C-4	3	24S	29E		40	NORTH	988	WEST	EDDY
¹² Dedicated Acres 1278.62	¹³ Joint or Infill	¹⁴ Consolidation Code		¹⁵ Order No. NSL-8242					

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	CORNER COORDINATES NAD 83, SPCS NM EAST A - X: 652903.76' / Y: 456331.32' B - X: 655544.67' / Y: 456330.90' C - X: 655569.82' / Y: 453685.20' D - X: 655595.06' / Y: 451030.27' E - X: 655608.14' / Y: 448375.24' F - X: 655621.54' / Y: 445720.18' G - X: 652967.76' / Y: 445724.10' H - X: 650312.09' / Y: 445726.24' I - X: 650298.13' / Y: 448381.95' J - X: 650284.73' / Y: 451033.82' K - X: 650273.76' / Y: 453689.39' L - X: 650262.85' / Y: 456331.74'	CORNER COORDINATES NAD 27, SPCS NM EAST A - X: 611720.17' / Y: 456272.14' B - X: 614361.07' / Y: 456271.72' C - X: 614386.15' / Y: 453626.09' D - X: 614411.31' / Y: 450971.20' E - X: 614424.32' / Y: 448316.23' F - X: 614437.66' / Y: 445661.21' G - X: 611783.88' / Y: 445665.15' H - X: 609128.23' / Y: 445667.29' I - X: 609114.33' / Y: 448322.94' J - X: 609101.00' / Y: 450974.76' K - X: 609090.10' / Y: 453630.27' L - X: 609079.26' / Y: 456272.56'	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered with the division. Signature: Date: 05/26/2022 Printed Name: JANA MENDIOLA E-mail Address: janalyn_mendiola@oxy.com
	BOTTOM HOLE LOCATION 40' FNL 988' FWL, SECTION 3 20683' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 651251.50' / Y: 456292.04' LAT: 32.25392182N / LON: 103.97777600W NAD 27, SPCS NM EAST X: 610067.91' / Y: 456232.87' LAT: 32.25379939N / LON: 103.97728626W	LAST TAKE POINT 185' FNL 991' FWL, SECTION 3 20537' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 651254.61' / Y: 456146.08' LAT: 32.25352057N / LON: 103.97776749W NAD 27, SPCS NM EAST X: 610071.02' / Y: 456086.91' LAT: 32.25339814N / LON: 103.97727776W	¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well surface location shown on this plat was plotted from field notes of the as-staked surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Data used for underground measurements were provided by others for reference only and does not constitute field measurements performed by R-Squared Global. Date of Survey: MAY 25, 2022 Signature and Seal of Professional Surveyor: Certificate Number: DAVID W. MYERS 11403
	FIRST TAKE POINT 147' FSL 1018' FWL, SECTION 10 10237' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 651329.66' / Y: 445672.30' LAT: 32.22527884N / LON: 103.97763481W NAD 27, SPCS NM EAST X: 610145.79' / Y: 445813.34' LAT: 32.22515609N / LON: 103.97714610W	KICK OFF POINT 191' FNL 1342' FWL, SECTION 15 9488' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 651655.17' / Y: 445534.23' LAT: 32.22434656N / LON: 103.97658579W NAD 27, SPCS NM EAST X: 610471.30' / Y: 445475.28' LAT: 32.22422380N / LON: 103.97609714W	SURFACE HOLE LOCATION 220' FSL 1760' FWL, SECTION 10 0' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 652070.80' / Y: 445944.80' LAT: 32.22547136N / LON: 103.97523732W NAD 27, SPCS NM EAST X: 610886.94' / Y: 445885.84' LAT: 32.22534860N / LON: 103.97474866W
	SHEET 1 OF 1 JOB No. R4155_007 REV 0 WM 5/25/2022		
	Distances/areas relative to NAD 83 Combined Scale Factor: 0.999778625 Convergence Angle: 00°11'10.650012"		

Schlumberger



OXY



Borehole:	Well:	Field:	Structure:
Tails CC 10_3 Federal Com 32H	Tails CC 10_3 Federal Com 32H	NM Eddy County (NAD 83)	Oxy Tails CC 10_3 Federal Com Pad

Gravity & Magnetic Parameters	Surface Location	NAD83 New Mexico State Plane, Eastern Zone, US Feet	Miscellaneous
Model: IFR1 MagDec: 6.81° FS: 47608.2nT Gravity FS: 998.471mgn (9.80665 Based)	Lat: N 32 13 31.70 Lon: W 103 58 30.85	Northing: 445944.8RUS Easting: 652700.8RUS Grid Conv: 0.191° Scale Fact: 0.99992313	Slot: Tails CC 10_3 Federal Com 32H Plan: Oxy Tails CC 10_3 Federal Com 32H Gyro-MWD 0' to 20683MD

Critical Points							
Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)S(-)	E(+)W(-)
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00
SHL	25.00	0.00	0.00	25.00	0.00	0.00	0.00
First Gyro Survey	93.04	0.48	303.72	93.04	0.18	0.16	-0.24
Last Gyro Survey	528.47	0.27	77.25	528.45	2.81	2.63	-2.41
First SLB Survey	567.00	0.80	84.15	566.98	2.83	2.67	-2.05
Actual KOP	9488.10	13.95	251.29	9428.27	-376.60	-410.58	-415.66
100' FSL Crossing	10178.00	60.76	334.94	9927.79	-63.26	-120.30	-720.38
Wolfcamp Y Intersection	10325.57	69.18	349.35	9991.20	65.09	5.00	-764.14
100' FNL Crossing	20621.00	89.77	358.64	10084.62	10317.70	10285.27	-817.53
Final MWD	20648.00	89.65	358.28	10084.75	10344.67	10312.26	-818.25
Proj to TD	20683.00	89.65	358.28	10084.97	10379.63	10347.24	-819.30

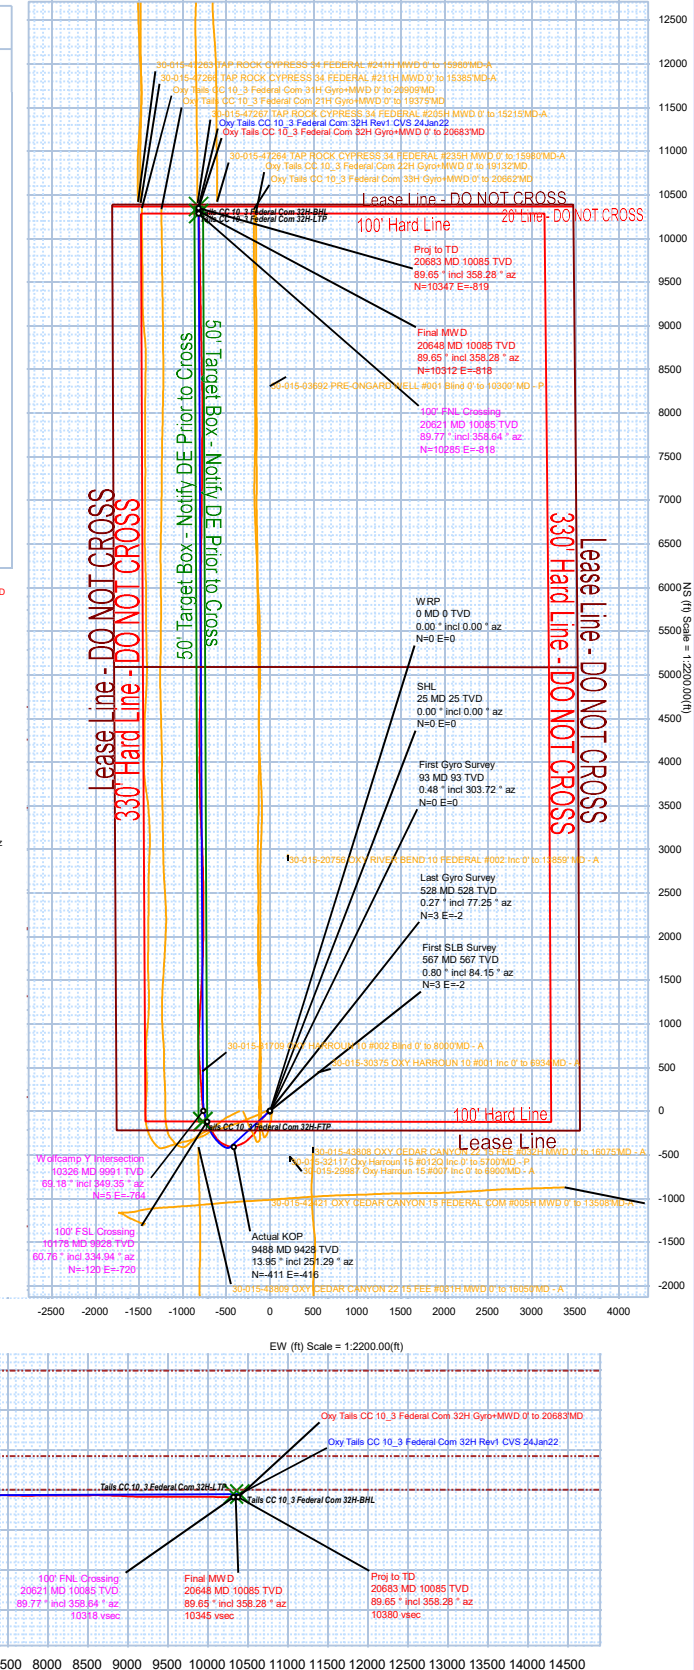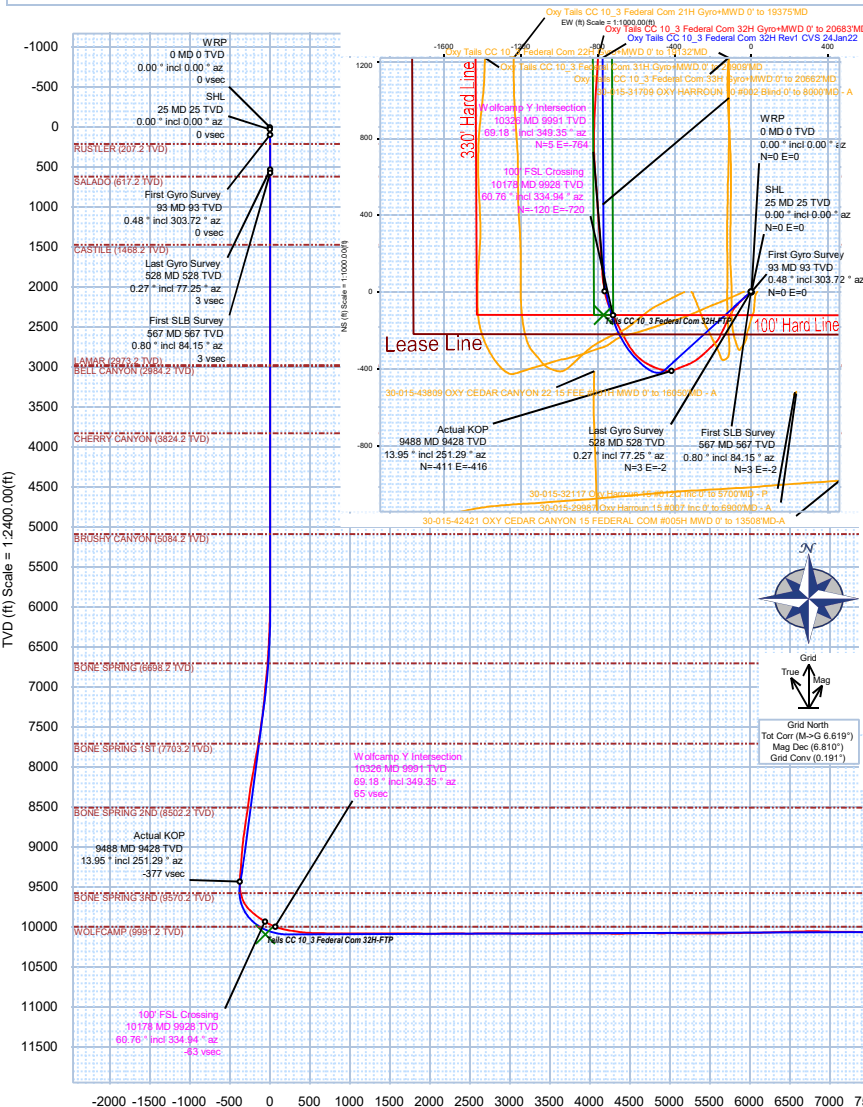

Schlumberger



Oxy Tails CC 10_3 Federal Com 32H Gyro+MWD 0' to 20683'MD Survey Geodetic Report (Def Survey)

Report Date: April 24, 2022 - 10:08 AM Client: OXY Field: NM Eddy County (NAD 83) Structure / Slot: Oxy Tails CC 10_3 Federal Com Pad / Tails CC 10_3 Federal Com 32H Well: Tails CC 10_3 Federal Com 32H Borehole: Tails CC 10_3 Federal Com 32H UWI / API#: Unknown / Unknown Survey Name: Oxy Tails CC 10_3 Federal Com 32H Gyro+MWD 0' to 20683'MD Survey Date: January 24, 2022 Tort / AHD / DDI / ERD Ratio: 256.957' / 11543.016 ft / 6.784 / 1.145 Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet Location Lat / Long: N 32° 13' 31.69688", W 103° 58' 30.85434" Location Grid N/E Y/X: N 445944.800 RUS, E 652070.800 RUS CRS Grid Convergence Angle: 0.1910° Grid Scale Factor: 0.99992313 Version / Patch: 2.10.829.1	Survey / DLS Computation: Minimum Curvature / Lubinski Vertical Section Azimuth: 355.488° (Grid North) Vertical Section Origin: 0.000 ft, 0.000 ft TVD Reference Datum: RKB TVD Reference Elevation: 2965.200 ft above MSL Seabed / Ground Elevation: 2940.200 ft above MSL Magnetic Declination: 6.810° Total Gravity Field Strength: 998.4708mgn (9.80665 Based) Gravity Model: GARM Total Magnetic Field Strength: 47608.200 nT Magnetic Dip Angle: 59.952° Declination Date: March 05, 2022 Magnetic Declination Model: IFR1 North Reference: Grid North Grid Convergence Used: 0.1900° Total Corr Mag North->Grid North: 6.6200° Local Coord Referenced To: Well Head	
---	--	--

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (RUS)	Easting (RUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	0.00	0.00	445944.80	652070.80	N 32 13 31.70	W 103 58 30.85
SHL	25.00	0.00	0.00	25.00	0.00	0.00	0.00	0.00	0.00	0.00	445944.80	652070.80	N 32 13 31.70	W 103 58 30.85
First Gyro Survey	93.04	0.48	303.72	93.04	0.18	0.16	-0.24	0.71	0.29	303.72	445944.96	652070.56	N 32 13 31.70	W 103 58 30.86
	184.29	0.84	304.83	184.28	0.84	0.75	-1.10	0.39	1.34	304.28	445945.55	652069.70	N 32 13 31.70	W 103 58 30.87
	271.51	0.58	312.64	271.50	1.57	1.42	-1.95	0.32	2.41	305.95	445946.22	652068.85	N 32 13 31.71	W 103 58 30.88
	365.92	0.41	326.13	365.90	2.21	2.02	-2.49	0.22	3.21	309.02	445946.82	652068.31	N 32 13 31.72	W 103 58 30.88
	460.33	0.22	21.48	460.31	2.67	2.47	-2.62	0.36	3.60	313.36	445947.27	652068.18	N 32 13 31.72	W 103 58 30.88
Last Gyro Survey	528.47	0.27	77.25	528.45	2.81	2.63	-2.41	0.34	3.57	317.46	445947.43	652068.39	N 32 13 31.72	W 103 58 30.88
First SLB Survey	567.00	0.80	84.15	566.98	2.83	2.67	-2.05	1.38	3.37	322.47	445947.47	652068.75	N 32 13 31.72	W 103 58 30.88
	662.00	0.07	356.20	661.98	2.90	2.80	-1.40	0.84	3.13	333.46	445947.60	652069.40	N 32 13 31.72	W 103 58 30.87
	758.00	0.06	346.85	757.98	3.01	2.91	-1.41	0.02	3.23	334.06	445947.71	652069.39	N 32 13 31.73	W 103 58 30.87
	853.00	0.04	52.91	852.98	3.08	2.98	-1.40	0.06	3.29	334.82	445947.78	652069.40	N 32 13 31.73	W 103 58 30.87
	911.00	0.04	151.86	910.98	3.07	2.97	-1.37	0.10	3.27	335.19	445947.77	652069.43	N 32 13 31.73	W 103 58 30.87
	1005.00	0.04	172.36	1004.98	3.01	2.91	-1.35	0.02	3.21	335.05	445947.71	652069.45	N 32 13 31.73	W 103 58 30.87
	1099.00	0.03	256.22	1098.98	2.97	2.87	-1.37	0.05	3.18	334.44	445947.67	652069.43	N 32 13 31.73	W 103 58 30.87
	1194.00	0.04	44.39	1193.98	2.99	2.89	-1.37	0.07	3.20	334.56	445947.69	652069.43	N 32 13 31.73	W 103 58 30.87
	1288.00	0.04	248.42	1287.98	3.00	2.90	-1.38	0.08	3.21	334.53	445947.70	652069.42	N 32 13 31.73	W 103 58 30.87
	1382.00	0.06	24.28	1381.98	3.03	2.93	-1.39	0.10	3.25	334.61	445947.73	652069.41	N 32 13 31.73	W 103 58 30.87
	1476.00	0.08	296.11	1475.98	3.11	3.01	-1.43	0.10	3.33	334.55	445947.81	652069.37	N 32 13 31.73	W 103 58 30.87
	1570.00	0.01	145.12	1569.98	3.14	3.03	-1.48	0.09	3.37	333.88	445947.83	652069.32	N 32 13 31.73	W 103 58 30.87
	1664.00	0.03	248.27	1663.98	3.12	3.01	-1.50	0.04	3.37	333.49	445947.81	652069.30	N 32 13 31.73	W 103 58 30.87
	1759.00	0.03	117.90	1758.98	3.10	2.99	-1.50	0.06	3.35	333.31	445947.79	652069.33	N 32 13 31.73	W 103 58 30.87
	1854.00	0.08	6.49	1853.98	3.15	3.05	-1.47	0.10	3.38	334.17	445947.85	652069.33	N 32 13 31.73	W 103 58 30.87
	1948.00	0.06	136.78	1947.98	3.18	3.08	-1.43	0.14	3.39	335.01	445947.87	652069.37	N 32 13 31.73	W 103 58 30.87
	2043.00	0.05	358.14	2042.98	3.18	3.08	-1.40	0.11	3.38	335.55	445947.88	652069.40	N 32 13 31.73	W 103 58 30.87
	2138.00	0.04	148.96	2137.98	3.19	3.09	-1.38	0.09	3.39	335.88	445947.89	652069.42	N 32 13 31.73	W 103 58 30.87
	2232.00	0.02	252.20	2231.98	3.16	3.06	-1.38	0.05	3.36	335.67	445947.86	652069.42	N 32 13 31.73	W 103 58 30.87
	2327.00	0.08	129.47	2326.98	3.11	3.01	-1.35	0.10	3.30	335.90	445947.81	652069.45	N 32 13 31.73	W 103 58 30.87
	2422.00	0.11	31.83	2421.98	3.13	3.04	-1.29	0.15	3.29	337.81	445947.84	652069.56	N 32 13 31.73	W 103 58 30.87
	2516.00	0.26	210.28	2515.98	3.02	2.93	-1.24	0.39	3.20	336.19	445947.73	652069.51	N 32 13 31.73	W 103 58 30.87
	2611.00	0.11	238.08	2610.97	2.80	2.70	-1.48	0.18	3.07	331.24	445947.50	652069.32	N 32 13 31.72	W 103 58 30.87
	2706.00	0.06	223.79	2705.97	2.73	2.61	-1.59	0.06	3.06	328.65	445947.41	652069.21	N 32 13 31.72	W 103 58 30.87
	2801.00	0.13	148.87	2800.97	2.60	2.48	-1.57	0.13	2.94	327.70	445947.28	652069.23	N 32 13 31.72	W 103 58 30.87
	2896.00	0.08	61.30	2895.97	2.53	2.42	-1.46	0.16	2.83	329.00	445947.22	652069.34	N 32 13 31.72	W 103 58 30.87
	2990.00	0.08	331.87	2989.97	2.62	2.51	-1.43	0.12	2.89	330.36	445947.31	652069.37	N 32 13 31.72	W 103 58 30.87
	3085.00	0.05	240.95	3084.97	2.66	2.55	-1.50	0.10	2.96	329.60	445947.35	652069.30	N 32 13 31.72	W 103 58 30.87
	3180.00	0.09	135.13	3179.97	2.59	2.48	-1.48	0.12	2.89	329.14	445947.28	652069.32	N 32 13 31.72	W 103 58 30.87
	3274.00	0.09	244.62	3273.97	2.50	2.39	-1.49	0.16	2.82	328.01	445947.19	652069.30	N 32 13 31.72	W 103 58 30.87
	3369.00	0.04	261.94	3368.97	2.48	2.36	-1.60	0.06	2.85	325.91	445947.16	652069.20	N 32 13 31.72	W 103 58 30.87
	3464.00	0.02	325.37	3463.97	2.49	2.37	-1.64	0.04	2.88	325.31	445947.17	652069.16	N 32 13 31.72	W 103 58 30.87
	3558.00	0.02	302.01	3557.97	2.51	2.39	-1.66	0.01	2.91	325.19	445947.19	652069.14	N 32 13 31.72	W 103 58 30.87
	3653.00	0.06	17.10	3652.97	2.57	2.44	-1.66	0.06	2.96	325.82	445947.24	652069.14	N 32 13 31.72	W 103 58 30.87
	3748.00	0.06	283.30	3747.97	2.63	2.50	-1.69	0.09	3.02	325.92	445947.30	652069.11	N 32 13 31.72	W 103 58 30.87
	3842.00	0.09	325.10	3841.97	2.71	2.58	-1.78	0.06	3.13	325.29	445947.38	652069.02	N 32 13 31.72	W 103 58 30.88
	3937.00	0.04	248.67	3936.97	2.76	2.62	-1.86	0.09	3.22	324.71	445947.42	652068.94	N 32 13 31.72	W 103 58 30.88
	4031.00	0.07	127.82	4030.97	2.71	2.58	-1.84	0.10	3.17	324.44	445947.38	652068.96	N 32 13 31.72	W 103 58 30.88
	4126.00	0.06	160.79	4125.97	2.63	2.49	-1.78	0.04	3.07	324.48	445947.29	652069.02	N 32 13 31.72	W 103 58 30.88
	4221.00	0.10	310.26	4220.97	2.64	2.50	-1.83	0.16	3.10	323.85	445947.30	652068.97	N 32 13 31.72	W 103 58 30.88
	4315.00	0.09	150.68	4314.97	2.63	2.49	-1.85	0.20	3.10	323.33	445947.29	652068.95	N 32 13 31.72	W 103 58 30.88
	4410.00	0.06	4.27	4409.97	2.61	2.47	-1.81	0.15	3.07	323.76	445947.27	652068.99	N 32 13 31.72	W 103 58 30.88
	4504.00	0.02	70.01	4503.97	2.66	2.53	-1.79	0.06	3.10	324.64	445947.33	652068.93	N 32 13 31.72	W 103 58 30.88
	4599.00	0.07	22.34	4598.97	2.72	2.59	-1.76	0.06	3.13	325.83	445947.39	652069.04	N 32 13 31.72	W 103 58 30.87
	4694.00	0.06	156.52	4693.97	2.72	2.60	-1.72	0.13	3.11	326.56	445947.40	652069.08	N 32 13 31.72	W 103 58 30.87
	4789.00	0.06	289.99	4788.97	2.70	2.57	-1.74	0.12	3.10	325.85	445947.37	652069.06	N 32 13 31.72	W 103 58 30.87
	4883.00	0.09	195.87	4882.97	2.65	2.51	-1.81	0.12	3.10	324.27	445947.31	652068.99	N 32 13 31.72	W 103 58 30.88
	4978.00	0.06	188.14	4977.97	2.53	2.39	-1.84	0.03	3.02	322.50	445947.19	652068.96	N 32 13 31.72	W 103 58 30.88
	5073.00	0.09	291.09	5072.97	2.51	2.37	-1.91	0.13	3.05	321.10	445947.17	652068.99	N 32 13 31.72	W 103 58 30.88
	5168.00	0.10	248.09	5167.97	2.52	2.37	-2.06	0.07	3.14	318.97	445947.17	652068.97	N 32 13 31.72	W 103 58 30.88
	5262.00	0.10	191.72	5261.97	2.42	2.26	-2.15	0.10	3.12	316.35	445947.06	652068.65	N 32 13 31.72	W 103 58 30.88
	5357.00	0.08	150.94	5356.97	2.28	2.12	-2.14	0.07	3.01	314.73	445946.92	652068.66	N 32 13 31.72	W 103 58 30.88
	5451.00	0.04	60.62	5450.97	2.23	2.08	-2.08	0.10	2.94	314.99	445946.88	652068.72	N 32 13 31.72	W 103 58 30.88
	5546.00	0.04	103.86	5545.97	2.24	2.08	-2.01	0.03	2.90	315.96	445946.88	652068.78	N 32 13 31.72	W 103 58 30.88
	5641.00	0.09	190.32	5640.97	2.15	2.00	-2.00	0.10	2.83	315.09	445946.80	652068.80	N 32 13 31.72	W 103 58 30.88
	5736.00	0.08	38.91	5735.97	2.13	1.98	-1.97	0.17	2.79	315.18	445946.78	652068.83	N 32 13 31.72	W 103 58 30.88
	5830.00	0.05	301.23	5829.97	2.20	2.05	-1.96	0.11	2.84	316.30	445946.85	652068.84	N 32 13 31.72	W 103 58 30.88
	5925.00	0.35	255.15	5924.97										

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (RUS)	Easting (RUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
Actual KOP	9049.00	14.06	243.25	9002.42	-344.65	-370.68	-316.35	1.05	487.32	220.48	445574.15	651754.47	N 32 13 28.04	W 103 58 34.55
	9143.00	13.89	246.06	9002.42	-352.64	-370.04	-307.64	1.25	507.04	221.77	445564.79	651753.81	N 32 13 27.95	W 103 58 34.79
	9238.00	14.59	249.82	9185.72	-358.99	-358.83	-222.73	0.87	525.80	222.73	445556.41	651712.00	N 32 13 27.87	W 103 58 35.05
	9332.00	14.06	246.67	9276.80	-365.87	-397.03	-380.42	1.00	549.87	223.78	445547.80	651690.41	N 32 13 27.78	W 103 58 35.30
	9488.10	13.95	251.29	9428.27	-376.60	-410.58	-415.66	0.72	584.25	225.35	445534.26	651655.17	N 32 13 27.65	W 103 58 35.71
	9490.00	13.95	251.35	9430.11	-376.72	-410.72	-416.09	0.72	584.66	225.37	445534.11	651654.74	N 32 13 27.65	W 103 58 35.71
	9585.00	24.77	282.13	9519.82	-373.80	-410.20	-446.56	15.30	606.37	227.43	445534.63	651624.27	N 32 13 27.65	W 103 58 36.07
	9690.00	33.09	289.63	9602.92	-357.46	-397.28	-490.54	9.54	631.23	231.00	445547.55	651590.30	N 32 13 27.78	W 103 58 36.58
	9774.00	41.11	298.77	9677.89	-329.94	-373.73	-541.92	10.33	658.29	235.41	445571.10	651528.93	N 32 13 28.02	W 103 58 37.18
	9869.00	46.81	314.84	9746.46	-286.35	-334.12	-594.06	13.15	681.57	240.64	445610.71	651476.79	N 32 13 28.41	W 103 58 37.78
100' FSL Crossing	9963.00	52.62	328.76	9807.39	-226.77	-277.82	-637.89	12.85	695.76	246.47	445667.01	651432.96	N 32 13 28.97	W 103 58 38.29
	10058.00	54.55	332.96	9863.79	-157.29	-211.05	-675.07	4.10	707.29	252.64	445733.76	651395.79	N 32 13 29.63	W 103 58 38.72
	10152.00	59.61	333.52	9914.86	-84.28	-140.62	-710.57	5.41	724.35	258.81	445804.19	651360.28	N 32 13 30.33	W 103 58 39.14
	10178.00	60.76	334.94	9927.79	-63.26	-120.30	-720.38	6.49	730.35	260.52	445824.51	651350.48	N 32 13 30.53	W 103 58 39.23
	10246.00	63.83	338.52	9959.41	-6.26	-65.00	-744.13	6.49	746.96	265.01	445879.80	651326.73	N 32 13 31.08	W 103 58 39.52
	10325.57	69.18	349.35	9991.20	65.09	326.25	-764.14	14.17	764.23	270.37	445949.79	651306.72	N 32 13 31.77	W 103 58 39.75
	10341.00	70.30	351.35	9996.54	79.51	19.27	-766.57	14.17	766.81	271.44	445964.06	651304.29	N 32 13 31.91	W 103 58 39.78
	10436.00	76.86	355.60	10023.39	170.51	109.73	-776.86	8.13	784.57	278.04	446054.52	651294.00	N 32 13 32.81	W 103 58 39.89
	10531.00	81.09	356.60	10041.56	263.73	202.74	-783.19	4.57	809.01	284.51	446147.53	651287.67	N 32 13 33.71	W 103 58 39.96
	10625.00	81.52	355.33	10055.77	356.64	295.43	-789.73	1.41	843.18	290.51	446240.21	651281.13	N 32 13 34.65	W 103 58 40.04
Wolfcamp Y Intersection	10720.00	85.89	356.04	10066.18	451.04	389.57	-796.83	4.66	886.96	296.05	446334.33	651274.03	N 32 13 35.58	W 103 58 40.12
	10815.00	89.18	356.52	10070.27	545.93	484.26	-802.99	3.50	937.71	301.09	446429.03	651267.87	N 32 13 36.52	W 103 58 40.18
	10862.00	90.39	359.39	10072.22	630.13	583.91	-806.52	3.13	965.82	304.95	446475.89	651264.48	N 32 13 36.82	W 103 58 40.25
	10910.00	88.99	355.72	10077.32	640.90	578.97	-810.02	2.37	995.66	305.56	446523.72	651260.84	N 32 13 37.45	W 103 58 40.26
	11004.00	88.47	356.63	10074.85	734.86	672.73	-816.29	1.11	1057.78	309.49	446617.48	651254.57	N 32 13 38.38	W 103 58 40.33
	11099.00	89.45	359.50	10076.58	829.74	767.65	-819.50	3.19	1122.88	313.13	446712.39	651251.37	N 32 13 39.32	W 103 58 40.36
	11193.00	90.07	1.94	10076.97	923.34	861.64	-818.32	2.68	1188.30	316.48	446806.37	651252.55	N 32 13 40.25	W 103 58 40.35
	11288.00	90.29	2.89	10076.67	1017.65	956.55	-814.31	1.03	1256.22	319.59	446901.28	651256.55	N 32 13 41.19	W 103 58 40.30
	11383.00	89.94	3.54	10076.48	1111.78	1051.40	-808.98	0.78	1326.61	322.42	446996.12	651261.88	N 32 13 42.13	W 103 58 40.23
	11477.00	89.99	110076.46	1207.45	1208.93	1345.23	-803.39	0.31	1398.93	324.95	447075.86	651267.46	N 32 13 43.06	W 103 58 40.16
100' FNL Crossing	11572.00	90.49	3.66	10075.98	1298.93	1240.04	-797.38	0.82	1474.28	327.97	447184.74	651273.48	N 32 13 43.92	W 103 58 40.09
	11667.00	90.58	3.97	10075.09	1392.88	1334.81	-790.81	0.10	1551.48	329.36	447279.50	651280.05	N 32 13 44.93	W 103 58 40.01
	11761.00	90.36	3.26	10074.32	1485.94	1428.62	-784.88	0.79	1630.03	331.22	447373.31	651285.98	N 32 13 45.86	W 103 58 39.94
	11856.00	90.11	2.98	10073.93	1580.09	1523.48	-779.71	0.40	1711.41	332.90	447468.16	651291.15	N 32 13 46.80	W 103 58 39.87
	11951.00	89.55	2.37	10074.21	1674.35	1618.37	-775.28	0.87	1794.49	334.40	447563.04	651295.58	N 32 13 47.74	W 103 58 39.82
	12045.00	88.74	2.30	10075.61	1767.67	1712.28	-771.45	0.26	1878.04	335.75	447656.95	651299.41	N 32 13 48.67	W 103 58 39.77
	12140.00	88.82	10072.68	1807.22	1852.57	1807.22	-768.22	0.89	1966.86	337.96	447766.83	651302.88	N 32 13 49.61	W 103 58 39.73
	12235.00	89.46	1.04	10072.23	1956.61	1902.20	-765.66	0.29	2050.85	338.05	447861.56	651304.30	N 32 13 50.50	W 103 58 39.64
	12329.00	90.54	1.02	10078.23	2050.17	1996.18	-764.95	1.16	2137.73	339.03	447940.82	651305.91	N 32 13 51.47	W 103 58 39.68
	12424.00	90.43	0.64	10077.43	2144.76	2091.17	-763.66	0.32	2226.24	339.94	448035.80	651307.20	N 32 13 52.41	W 103 58 39.66
Final MWD	12519.00	90.36	0.49	10076.77	2239.39	2186.16	-762.72	0.17	2315.39	340.77	448130.79	651308.14	N 32 13 53.35	W 103 58 39.65
	12614.00	90.26	359.74	10076.26	2334.08	2281.16	-762.53	0.80	2405.23	341.52	448225.78	651308.33	N 32 13 54.29	W 103 58 39.64
	12708.00	88.46	359.27	10077.31	2427.84	2375.15	-763.34	1.98	2494.80	342.18	448319.76	651307.52	N 32 13 55.22	W 103 58 39.65
	12803.00	89.89	0.07	10077.85	2522.57	2470.70	-763.89	2.68	2582.82	342.82	448412.89	651305.74	N 32 13 56.16	W 103 58 39.65
	12897.00	90.64	359.25	10076.59	2616.32	2564.12	-764.45	0.91	2675.64	343.40	448506.72	651305.02	N 32 13 57.09	W 103 58 39.65
	12992.00	90.01	358.83	10076.05	2711.13	2659.11	-766.04	0.80	2767.25	343.93	448603.70	651304.82	N 32 13 58.03	W 103 58 39.67
	13087.00	89.49	358.50	10076.47	2805.98	2754.08	-768.25	0.65	2859.23	344.41	448698.66	651302.61	N 32 13 58.97	W 103 58 39.69
	13181.00	89.99	358.43	10076.90	2899.86	2848.05	-770.77	0.54	2950.50	344.86	448792.62	651300.09	N 32 13 59.90	W 103 58 39.72
	13276.00	89.30	357.94	10077.48	2994.75	2943.00	-773.78	0.89	3043.02	345.27	448887.56	651297.08	N 32 14 0.84	W 103 58 39.75
	13371.00	89.08	357.43	10078.83	3089.67	3037.91	-777.62	0.58	3135.85	345.64	448982.47	651293.24	N 32 14 1.78	W 103 58 39.79
Proj to TD	13466.00	89.62	357.13	10078.90	3184.61	3132.80	-782.13	0.65	3228.95	345.98	449077.35	651288.74	N 32 14 2.72	W 103 58 39.84
	13560.00	89.39	357.08	10078.53	3278.87	3226.53	-782.95	0.35	3321.93	346.29	449169.32	651283.93	N 32 14 3.65	W 103 58 39.80
	13655.00	90.32	357.15	10080.58	3373.54	3321.55	-791.65	0.74	3414.59	346.59	449266.09	651279.21	N 32 14 4.59	W 103 58 39.94
	13749.00	90.84	357.19	10079.63	3467.49	3415.43	-796.29	0.55	3507.03	346.88	449359.96	651274.57	N 32 14 5.52	W 103 58 39.99
	13844.00	90.85	357.98	10078.23	3562.42	3510.34	-800.30	0.83	3600.41	347.16	449454.86	651270.57	N 32 14 6.46	W 103 58 40.04
	13938.00	90.95	358.84	10076.75	3656.28	3604.29	-802.91	0.92	3692.64	347.44	449548.80	651267.96	N 32 14 7.39	W 103 58 40.06
	14033.00	90.88	359.38	10075.40	3751.08	3699.27	-804.38	0.74	3785.71	347.73	449643.78	651266.48	N 32 14 8.33	W 103 58 40.08
	14128.00	90.00	359.19	10076.83	3845.87	3794.26	-805.57	0.64	3878.83	348.01	449738.76	651265.30	N 32 14 9.27	W 103 58 40.09
	14222.00	89.58	359.59	10076.58	3939.58	3888.25	-806.65	0.78	3971.02	348.32	449832.74	651264.34	N 32 14 10.20	W 103 58 40.09
	14317.00	89.49	359.98	10076.28	4034.38	3983.24	-806.92	0.43	4064.16	348.55	449927.73	651263.94	N 32 14 11.14	W 103 58 40.09
100' FNL Crossing	14412.00	90.91	0.76	10075.95	4129.03	4078.24	-806.31	1.71	4157.18	348.82	450022.72	651264.55	N 32 14 12.08	W 103 58 40.08
	14506.00	88.26	359.00	10076.63	4222.74	4172.22	-806.51	3.38	4249.46	349.06	450116.70	651264.36	N 32 14 13.01	W 103 58 40.08
	14601.00	89.60	359.42	10078.40	4317.52	4267.20	-807.82	1.48	4342.99	349.28	450211.66	651263.05	N 32 14 13.95	W 103 58 40.09
	14695.00	91.15	0.38	10077.79	4411.24	4361.19	-807.98	1.94	4435.40	349.50	450305.65	651262.88	N 32 14 14.88	W 103 58

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS ("/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
Survey Type:	Def Survey													
Survey Error Model:	ISCWSA Rev 3 *** 3-D 95.000% Confidence 2.7955 sigma													
Survey Program:														
Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey						
	1	0.000	25.000	1/98.425	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Tails CC 10_3 Federal Com 32H / Oxy Tails CC 10_3 Federal Com 32H Gyro+MWD 0' to 20683'MD						
	1	25.000	25.000	Act Stns	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Tails CC 10_3 Federal Com 32H / Oxy Tails CC 10_3 Federal Com 32H Gyro+MWD 0' to 20683'MD						
	1	25.000	528.470	Act Stns	26.400	26.400	GYD_GC+DROP+OH	Tails CC 10_3 Federal Com 32H / Oxy Tails CC 10_3 Federal Com Tails CC 10_3 Federal Com 32H /						
	1	528.470	20683.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS	Oxy Tails CC 10_3 Federal Com 32H Gyro+MWD 0' to 20683'MD						

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Well Name: TAILS CC 10_3 FED COM	Well Location: T24S / R29E / SEC 10 / SESW / 32.22547 / -103.975237	County or Parish/State: EDDY / NM
Well Number: 32H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM81616	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001548880	Well Status: Drilling Well	Operator: OXY USA INCORPORATED

Subsequent Report

Sundry ID: 2689263

Type of Submission: Subsequent Report	Type of Action: Workover Operations
Date Sundry Submitted: 08/25/2022	Time Sundry Submitted: 03:39
Date Operation Actually Began: 05/06/2022	

Actual Procedure: RUPU 05/06/22, RIH & clean out to PBTD @ 20628', pressure test casing to 6000# for 30 min, good test. RIH & perf @ 20537-10237' Total 1462 holes. Frac in 43 stages w/ 234733BBL Produced Water + 231485BBL Brackish Water (> 1,000 mg/I TDS and 10,000 mg/I TDS) w/ 25688570# sand, RD Liberty 05/23/22. Well ready to produce 05/29/22. OXY USA Inc. requests a tubing exception while continuing to flow back this well. The estimated date of tubing install is 09/30/2022. Formation Tops for this completion are as follows: RUSTLER 204'M 204'V SALADO 476'M 476'V CASTILE 1392'M 1392'V DELAWARE 2985'M 2985'V BELL CANYON 2990'M 2990'V CHERRY CANYON 3845'M 3845'V BRUSHY CANYON 4950'M 5117'V BONE SPRING 6710'M 6707'V 1ST BONE SPRING 7745'M 7731'V 2ND BONE SPRING 8573'M 8541'V 3RD BONE SPRING 9692'M 9612'V WOLFCAMP 10248'M 9960'V

Received by OCD: 8/27/2022 10:22:26 PM

Page 9 of 14

Well Name: TAILS CC 10_3 FED COM	Well Location: T24S / R29E / SEC 10 / SESW / 32.22547 / -103.975237	County or Parish/State: EDDY / NM
Well Number: 32H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM81616	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001548880	Well Status: Drilling Well	Operator: OXY USA INCORPORATED


Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JANA MENDIOLA	Signed on: AUG 25, 2022 03:38 PM
Name: OXY USA INCORPORATED	
Title: Regulatory Coordinator	
Street Address: PO BOX 50250	
City: Midland	State: TX
Phone: (432) 685-5936	
Email address: Janalyn_mendiola@oxy.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG							1. WELL API NO. 30-015-48880			
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)							2. Type of Lease ☐ STATE ☐ FEE ☒ FED/INDIAN			
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER							3. State Oil & Gas Lease No.			
8. Name of Operator: OXY USA INC.						9. OGRID: 16696				
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710						11. Pool name or Wildcat PURPLE SAGE WOLFCAMP				
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	N	10	24S	29E		220	SOUTH	1760	WEST	EDDY
BH:	L4	3	24S	29E		40	NORTH	988	WEST	EDDY
13. Date Spudded 12/19/21	14. Date T.D. Reached 04/23/2022		15. Date Rig Released 05/01/2022		16. Date Completed (Ready to Produce) 05/29/2022		17. Elevations (DF and RKB, RT, GR, etc.) 2940' GL			
18. Total Measured Depth of Well 20683'M 10085'V			19. Plug Back Measured Depth 20628'M 10084'V		20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run Gamma Ray			
22. Producing Interval(s), of this completion - Top, Bottom, Name 10237-20537' Wolfcamp										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
10.75" J55		45.5		540'		14.75"		515sx-surf circ		
7.625" Q125CYHP		29.7		9455'		9.875"		2285sx-surf		
5.5" P110CY liner		20		9326'-20655'		6.75"		760sx-TOC@9319'		
24. LINER RECORD										
SIZE	TOP	BOTTOM		SACKS CEMENT	SCREEN		25. TUBING RECORD			
							SIZE	DEPTH SET		PACKER SET
26. Perforation record (interval, size, and number) 10237-20537' Total 1462 holes, Hole Size=0.42						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						10237-20537'		234733BBL Produced Water + 231485BBL Brackish Water w/ 25688570# sand		
28. PRODUCTION										
Date First Production		Production Method (Flowing, gas lift, pumping - Size and type pump)				Well Status (Prod. or Shut-in)				
06/04/2022		Flowing				Prod.				
Date of Test	Hours Tested	Choke Size	Prod'n For	Oil - Bbl	Gas - MCF	Water - Bbl.	Gas - Oil Ratio			
07/08/2022	24 hrs.	64/128	Test Period	4178	6967	6969	1668			
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.	Oil Gravity - API - (Corr.)				
	1343		4178	6967	6969					
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD							30. Test Witnessed By			
31. List Attachments WBD										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.							33. Rig Release Date:			
34. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Printed										
Signature: 		Name: <u>Jana Mendiola</u>			Title: <u>Sr. Regulatory Analyst</u>			Date: <u>08/27/2022</u>		
E-mail Address: <u>janalyn_mendiola@oxy.com</u>										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 204'	T. Bell Canyon 2990'	T. Ojo Alamo	T. Penn A "
T. Salado 476'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 1392'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 2985'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 3845'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 4950'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinbry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Springs 6710'	T. Todilto	
T. Abo	T. 1 st Bone Springs 7745'	T. Entrada	
T. Wolfcamp 10248'	T. 2 nd Bone Springs 8573'	T. Wingate	
T. Penn	T. 3 rd Bone Springs 9692'	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....


No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

OXY USA Inc.
Tails CC 10-3 Federal Com 32H
API No. 30-015-48880

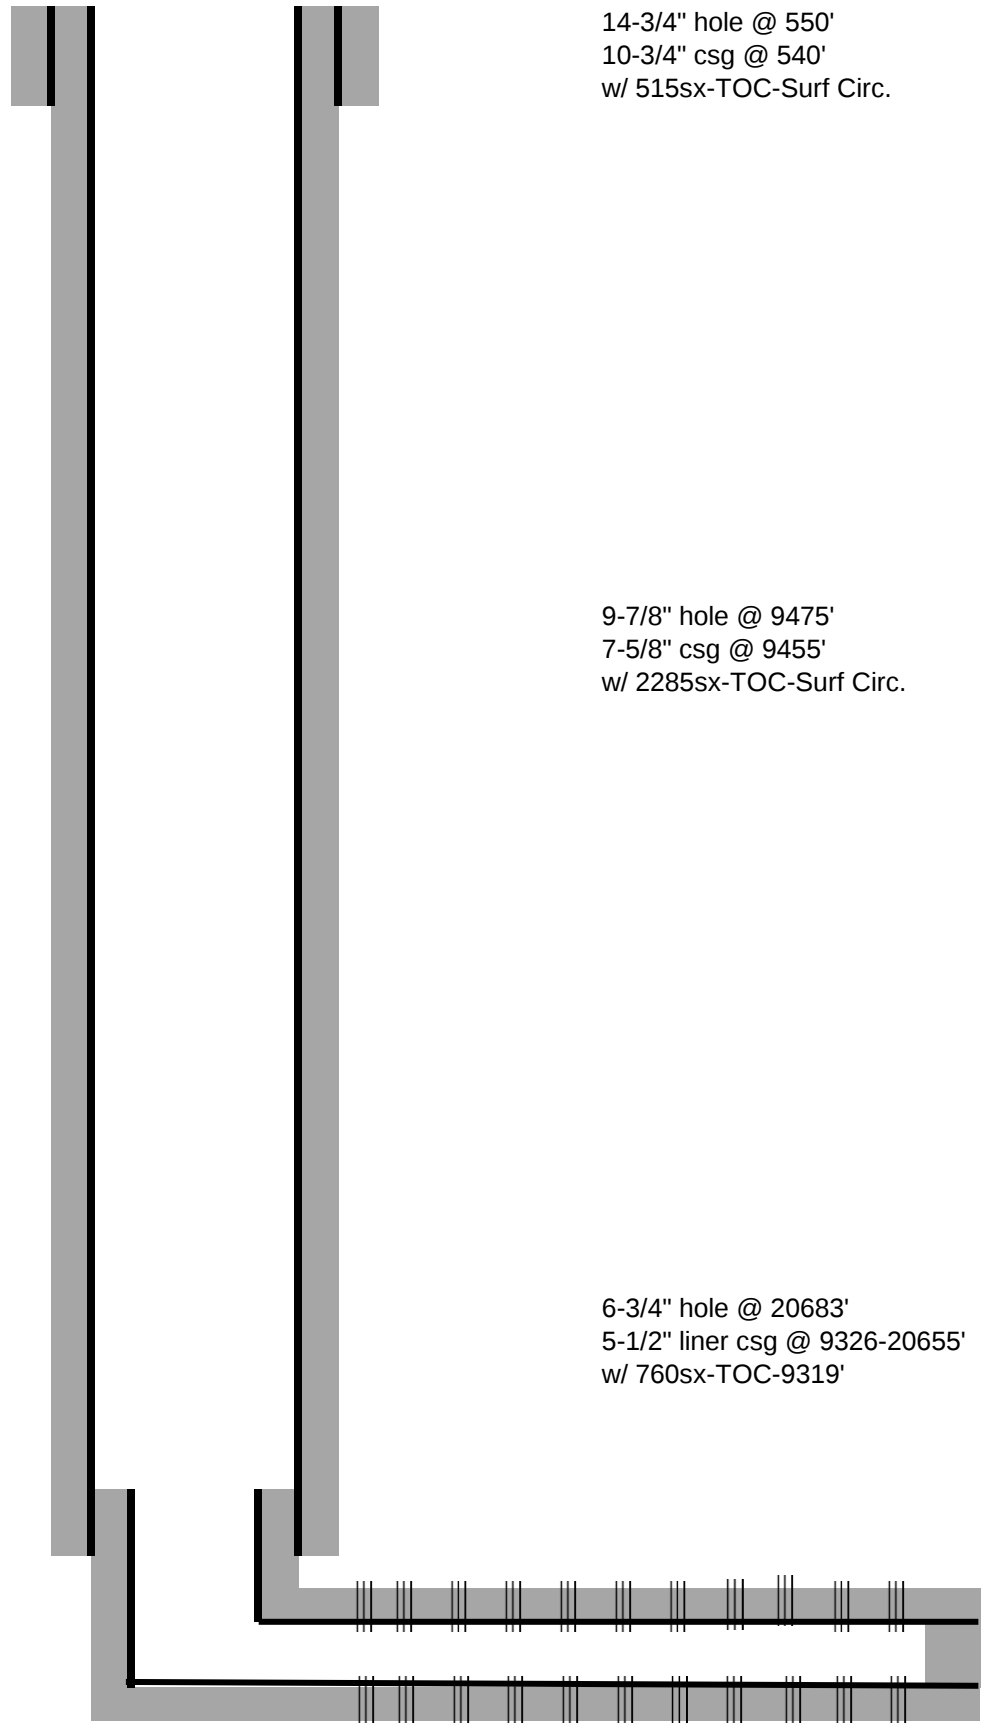

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 138636

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 138636
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 138636

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 138636
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
Ilowe	COA: File 3160-4 Completion Report within 10 days to NMOCD after BLM approval.	9/20/2022