

District I

1625 N. French Dr., Hobbs, NM 88240

District II

811 S. First St., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104

Revised August 1, 2011

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☒ AMENDED REPORT**I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT**

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date: NW - 08/11/2022
⁴ API Number 30 - 015-47247	⁵ Pool Name PURPLE SAGE WOLFCAMP *NSL-8344	⁶ Pool Code 98220
⁷ Property Code: 328304	⁸ Property Name: JEFF SMITH MDP1 7-18 FEDERAL COM	⁹ Well Number: 173H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
N	6	24S	31E		275	SOUTH	2256	WEST	EDDY

¹¹ Bottom Hole Location

FTP- 314' FNL 2337' FWL LTP- 195' FSL 2345' FWL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	18	24S	31E		52	SOUTH	2346	WEST	EDDY
¹² Lse Code F	¹³ Producing Method Code : P		¹⁴ Gas Connection Date: 8/14/22		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
237722	CENTURION PIPELINE L.P.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 04/21/22	²² Ready Date 08/11/2022	²³ TD 22393'M 11739'V	²⁴ PBTD 22349'M 11738'V	²⁵ Perforations 12179-22250'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	³⁰ Sacks Cement
14-3/4"		10-3/4"		845'	1160
9-7/8"		7-5/8"		10728'	2621
6-3/4"		5-1/2"		22373'	972
		2-3/8" tbg		11513'	na

V. Well Test Data

³¹ Date New Oil 8/14/22	³² Gas Delivery Date 8/14/22	³³ Test Date 8/20/22	³⁴ Test Length 24 hrs	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 1188
³⁷ Choke Size 128/128	³⁸ Oil 3162	³⁹ Water 7765	⁴⁰ Gas 7140		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.



Signature:

Printed name: JANA MENDIOLA

Title: SR. REGULATORY ANALYST

E-mail Address:

Janalyn_mendiola@oxy.com

Date:

11/12/2022

Phone:

432-685-5936

OIL CONSERVATION DIVISION

Approved by: Sarah McGrath

Title: Petroleum Specialist - A

Approval Date: 01/19/2023

File 3160-4 within 10 days of BLM Approval
Upload CBL to OCD Permitting/Well Logs

1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (505) 748-1283 Fax: (505) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-015-47247	² Pool Code 98220	³ Pool Name PURPLE SAGE; WOLFCAMP
⁴ Property Code 328304	Property Name JEFF SMITH MDP1 7_18 FED COM	⁶ Well Number 173H
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁹ Elevation 3460'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	6	24S	31E		275	SOUTH	2256	WEST	EDDY
¹¹ Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	18	24S	31E		52	SOUTH	2346	WEST	EDDY
¹² Dedicated Acres 655.04	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. NSL-8344						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	CORNER COORDINATES NAD 83, SPCS NM EAST A - X: 701001.66' / Y: 451107.73' B - X: 701025.74' / Y: 445824.06' C - X: 701051.64' / Y: 440540.15' D - X: 698345.13' / Y: 440527.61' E - X: 698324.01' / Y: 445811.29' F - X: 698302.38' / Y: 451095.14'	CORNER COORDINATES NAD 27, SPCS NM EAST A - X: 659817.78' / Y: 451048.69' B - X: 659841.68' / Y: 445765.14' C - X: 659867.40' / Y: 440481.35' D - X: 657160.90' / Y: 440468.81' E - X: 657139.96' / Y: 445752.36' F - X: 657118.51' / Y: 451036.10'	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature: Date: 8/10/22	
	SURFACE HOLE LOCATION 275' FSL 2256' FWL, SECTION 6 NAD 83, SPCS NM EAST X: 700557.11' / Y: 451381.09' LAT: 32.23987312N / LON: 103.81835969W NAD 27, SPCS NM EAST X: 659373.24' / Y: 451322.04' LAT: 32.23974999N / LON: 103.81787456W	KICK OFF POINT 365' FSL 2528' FWL, SECTION 6 11077' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 700829.17' / Y: 451471.43' LAT: 32.24011787N / LON: 103.81747839W NAD 27, SPCS NM EAST X: 659645.30' / Y: 451412.38' LAT: 32.23994747N / LON: 103.81699327W	FIRST TAKE POINT 314' FNL 2337' FWL, SECTION 7 12179' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 700640.22' / Y: 450792.28' LAT: 32.23825353N / LON: 103.81810004W NAD 27, SPCS NM EAST X: 659456.33' / Y: 450733.25' LAT: 32.23813038N / LON: 103.81761499W	¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well surface location shown on this plat was plotted from field notes of the as-staked surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Data used for underground measurements were provided by others for reference only and does not constitute field measurements performed by R-Squared Global. Date of Survey: AUGUST 9, 2022 Signature and Seal of Professional Surveyor: Certificate Number: LLOYD P. SHORT 21653
	LAST TAKE POINT 195' FSL 2345' FWL, SECTION 18 22250' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 700689.64' / Y: 440733.36' LAT: 32.21060296N / LON: 103.81809630W NAD 27, SPCS NM EAST X: 659505.37' / Y: 440674.55' LAT: 32.21047955N / LON: 103.81761252W	BOTTOM HOLE LOCATION 52' FSL 2346' FWL, SECTION 18 22393' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 700691.21' / Y: 440590.40' LAT: 32.21020997N / LON: 103.81809335W NAD 27, SPCS NM EAST X: 659506.97' / Y: 440530.91' LAT: 32.21008466N / LON: 103.81760956W		
	NEAREST TO LEASE MD = 17,226' FURTHEST FROM LEASE MD = 21,608'			



Distances/areas relative to NAD 83 Combined Scale Factor: 0.99977704 Convergence Angle: 00°16'56.57999"



Borehole:	Well:	Field:	Structure:
Jeff Smith MDP1 7_18 Fed Com 173H	Jeff Smith MDP1 7_18 Fed Com 173H	NM Eddy County (NAD 83)	Oxy Jeff Smith MDP1 7_18 Fed Com

Gravity & Magnetic Parameters	Surface Location	NAD83 New Mexico State Plane, Eastern Zone, US Feet	Miscellaneous
Model: IFR1 MagDec: 6.68° Dip: 59.901° Date: 20-Jun-2022 FS: 47632.6nT Gravity FS: 998.437mgN (9.80665 Based)	Lat: N 32 14 23.54 Lon: W 103 49 6.09	Northing: 451381.09FIUS Easting: 700557.11FIUS Grid Conv: 0.2747° Scale Fact: 0.99993813	Jeff Smith MDP1 7_18 Fed Com 173H TVD Ref: RKB(3492.5ft above MSL) Plan: Oxy Jeff Smith MDP1 7_18 Fed Com 173H Gyro+MWD 0' to 22393MD

Critical Points								
Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)S(-)	E(+)W(-)	DLS
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
SHL	32.50	0.00	0.00	32.50	0.00	0.00	0.00	
First Gyro Survey	105.28	0.22	196.84	105.28	0.13	-0.13	-0.04	0.30
Last Gyro Survey	847.31	1.17	220.67	847.04	10.79	-11.00	-15.74	0.27
First SLB Survey	927.00	1.28	217.60	926.71	12.10	-12.33	-16.82	0.16
Actual KOP	11077.00	2.28	167.76	11054.29	-86.63	90.34	272.08	7.86
Wolfcamp Intersection	11524.40	34.52	206.26	11470.50	53.15	-49.71	252.36	5.49
100' FNL Crossing	11962.00	79.09	190.84	11689.22	374.39	-373.20	89.27	14.97
Exit Target Box	17024.00	91.00	177.54	11684.27	5426.93	-5425.38	150.09	1.17
Enter Target Box	17338.00	89.95	182.57	11683.21	5740.82	-5739.25	154.17	3.54
Final MWD Survey	22334.00	89.04	179.49	11738.21	10733.21	-10732.39	133.58	0.56
100' FSL Crossing	22343.00	89.04	179.49	11738.36	10742.21	-10741.38	133.66	0.00
Proj to TD	22393.00	89.04	179.49	11739.20	10792.20	-10791.38	134.11	0.00

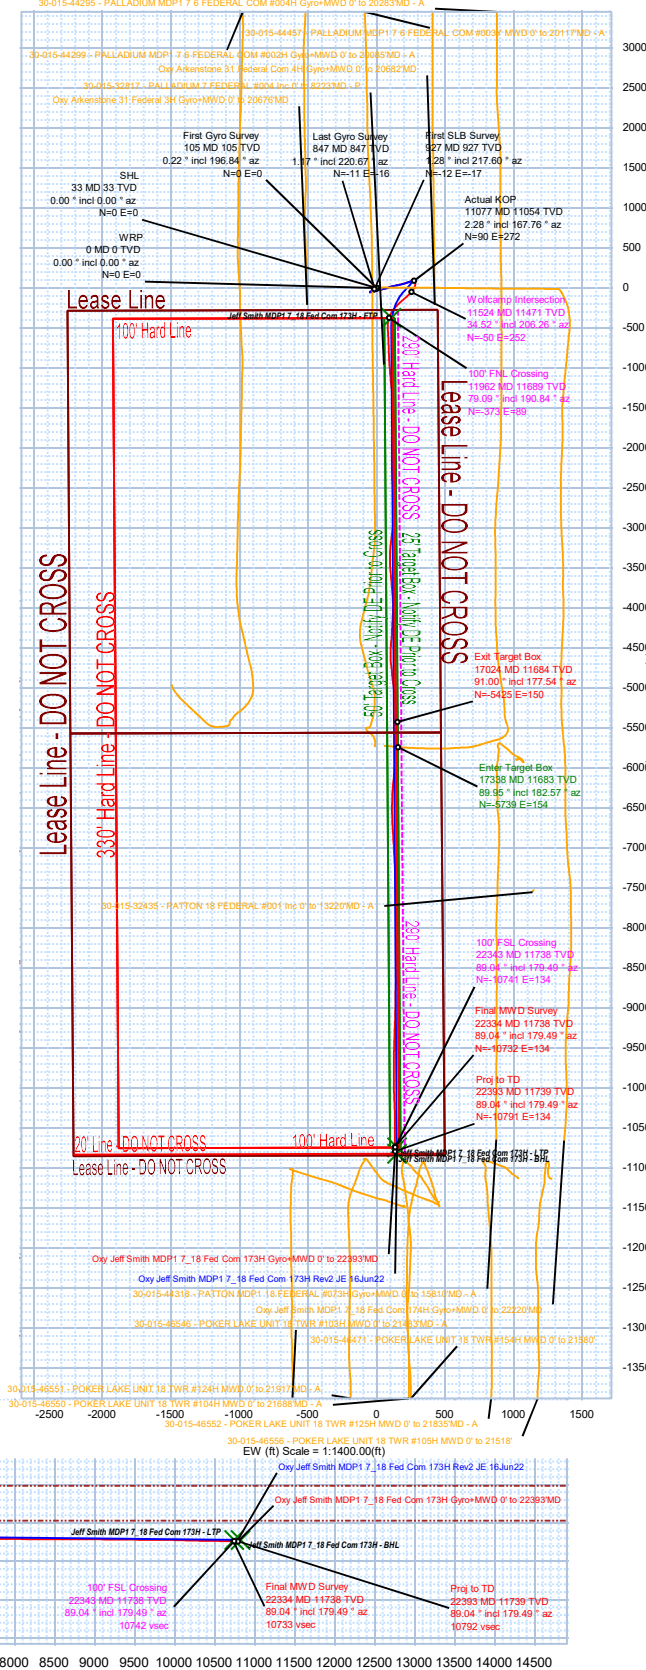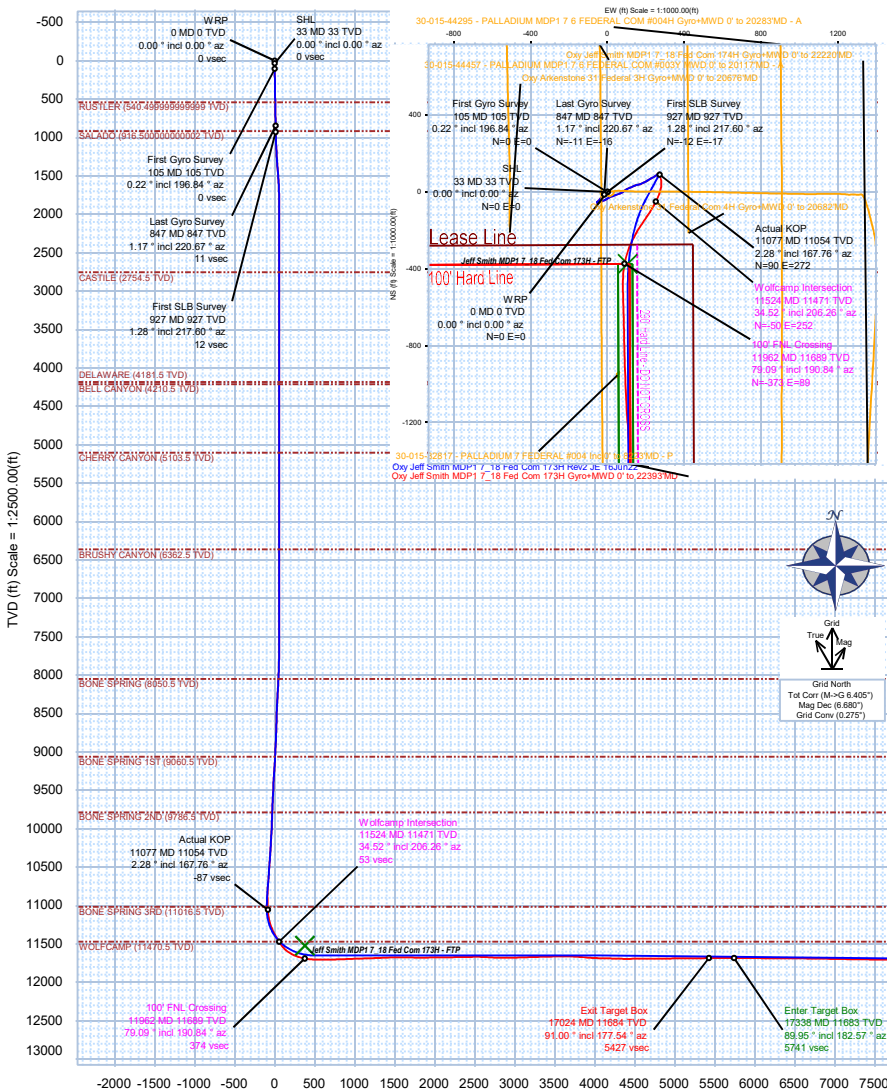

Schlumberger



Oxy Jeff Smith MDP1 7_18 Fed Com 173H Gyro+MWD 0' to 22393'MD

Survey Geodetic Report

(Def Survey)

Report Date: July 06, 2022 - 12:26 PM
Client: OXY USA INC.
Field: NM Eddy County (NAD 83)
Structure / Slot: Oxy Jeff Smith MDP1 7_18 Fed Com / Jeff Smith MDP1 7_18 Fed Com 173H
Well: Jeff Smith MDP1 7_18 Fed Com 173H
Borehole: Jeff Smith MDP1 7_18 Fed Com 173H
UWI / AP#: Unknown / Unknown
Survey Name: Oxy Jeff Smith MDP1 7_18 Fed Com 173H Gyro+MWD 0' to 22393'MD
Survey Date: May 10, 2022
Tort / AHD / DDI / ERD Ratio: 317.192 * / 11390.753 ft / 6.838 / 0.970
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 14' 23.54329", W 103° 49' 6.09492"
Location Grid N/E Y/X: N 451381.090 ftUS, E 700557.110 ftUS
CRS Grid Convergence Angle: 0.2747 °
Grid Scale Factor: 0.99993813
Version / Patch: 2.10.829.1

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 179.219 ° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 3492.500 ft above MSL
Seabed / Ground Elevation: 3460.000 ft above MSL
Magnetic Declination: 6.680 °
Total Gravity Field Strength: 998.4365mgn (9.80665 Based)
Gravity Model: GARM
Total Magnetic Field Strength: 47632.600 nT
Magnetic Dip Angle: 59.901 °
Declination Date: June 20, 2022
Magnetic Declination Model: IFR1
North Reference: Grid North
Grid Convergence Used: 0.2800 °
Total Corr Mag North->Grid North: 6.4000 °
Local Coord Referenced To: Well Head

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	0.00	0.00	451381.09	700557.11	N 32 14 23.54	W 103 49 6.09
SHL	32.50	0.00	0.00	32.50	0.00	0.00	0.00	0.00	0.00	0.00	451381.09	700557.11	N 32 14 23.54	W 103 49 6.09
First Gyro Survey	105.28	0.22	196.84	105.28	0.13	-0.13	-0.04	0.30	0.14	196.84	451380.96	700557.07	N 32 14 23.54	W 103 49 6.10
	192.56	1.00	238.17	192.55	0.69	-0.70	-0.74	0.97	1.01	226.61	451380.39	700556.37	N 32 14 23.54	W 103 49 6.10
	281.54	1.32	240.17	281.52	1.58	-1.62	-2.28	0.36	2.80	234.74	451379.47	700554.83	N 32 14 23.53	W 103 49 6.12
	375.77	1.68	235.91	375.71	2.87	-2.93	-4.37	0.40	5.26	236.17	451378.16	700552.74	N 32 14 23.51	W 103 49 6.15
	469.90	1.87	238.59	469.80	4.41	-4.50	-6.82	0.22	8.18	236.58	451376.59	700550.29	N 32 14 23.49	W 103 49 6.17
	564.21	2.00	242.62	564.05	5.93	-6.06	-9.60	0.20	11.35	237.73	451375.03	700547.51	N 32 14 23.48	W 103 49 6.21
	658.58	1.84	232.36	658.37	7.58	-7.74	-12.26	0.40	14.50	237.72	451373.35	700544.85	N 32 14 23.47	W 103 49 6.24
	752.98	1.40	225.94	752.73	9.28	-9.47	-14.29	0.50	17.14	236.46	451371.62	700542.82	N 32 14 23.45	W 103 49 6.26
Last Gyro Survey	847.31	1.17	220.67	847.04	10.79	-11.00	-15.74	0.27	19.21	235.05	451370.09	700541.37	N 32 14 23.44	W 103 49 6.28
First SLB Survey	927.00	1.28	217.60	926.71	12.10	-12.33	-16.82	0.16	20.85	233.76	451368.76	700540.29	N 32 14 23.42	W 103 49 6.29
	1022.00	2.25	218.42	1021.67	14.37	-14.63	-18.62	1.02	23.68	231.85	451366.46	700538.49	N 32 14 23.40	W 103 49 6.31
	1116.00	3.45	220.63	1115.55	17.92	-18.22	-21.61	1.28	28.27	229.87	451362.87	700535.50	N 32 14 23.38	W 103 49 6.35
	1210.00	4.22	222.10	1209.34	22.58	-22.93	-25.77	0.83	34.50	228.34	451358.16	700531.34	N 32 14 23.32	W 103 49 6.40
	1304.00	4.97	221.65	1303.03	28.12	-28.54	-30.80	0.80	41.99	227.18	451352.65	700526.31	N 32 14 23.26	W 103 49 6.46
	1399.00	5.54	221.29	1397.63	34.56	-35.06	-36.56	0.60	50.65	226.20	451346.03	700520.55	N 32 14 23.20	W 103 49 6.52
	1493.00	5.61	222.86	1491.19	41.25	-41.84	-42.68	0.18	59.77	225.57	451339.25	700514.43	N 32 14 23.13	W 103 49 6.59
	1588.00	5.13	224.21	1585.77	47.62	-48.29	-48.80	0.52	68.65	225.30	451332.81	700508.31	N 32 14 23.07	W 103 49 6.67
	1682.00	2.80	234.43	1679.54	51.94	-52.64	-53.60	2.58	75.12	225.52	451328.46	700503.52	N 32 14 23.02	W 103 49 6.72
	1777.00	0.41	263.54	1774.50	53.26	-54.02	-55.82	2.58	77.68	225.94	451327.07	700501.29	N 32 14 23.01	W 103 49 6.75
	1872.00	0.09	351.45	1869.50	53.22	-53.99	-56.17	0.44	77.91	226.14	451327.10	700500.94	N 32 14 23.01	W 103 49 6.75
	1968.00	0.07	161.85	1965.50	53.20	-53.97	-56.16	0.17	77.89	226.14	451327.12	700500.95	N 32 14 23.01	W 103 49 6.75
	2063.00	0.07	267.32	2060.50	53.26	-54.03	-56.20	0.12	77.96	226.13	451327.07	700500.91	N 32 14 23.01	W 103 49 6.75
	2158.00	0.06	172.42	2155.50	53.31	-54.08	-56.26	0.10	78.03	226.13	451327.01	700500.86	N 32 14 23.01	W 103 49 6.75
	2253.00	0.08	227.03	2250.50	53.40	-54.17	-56.30	0.07	78.13	226.10	451326.92	700500.82	N 32 14 23.01	W 103 49 6.75
	2348.00	0.08	109.96	2345.50	53.47	-54.24	-56.28	0.14	78.17	226.06	451326.85	700500.83	N 32 14 23.01	W 103 49 6.75
	2443.00	0.06	259.12	2440.50	53.50	-54.27	-56.27	0.14	78.18	226.03	451326.82	700500.84	N 32 14 23.01	W 103 49 6.75
	2538.00	0.06	214.98	2535.50	53.55	-54.32	-56.35	0.05	78.27	226.05	451326.77	700500.77	N 32 14 23.01	W 103 49 6.75
	2633.00	0.09	311.98	2630.50	53.54	-54.32	-56.43	0.12	78.32	226.10	451326.78	700500.68	N 32 14 23.01	W 103 49 6.75
	2728.00	0.06	158.64	2725.50	53.54	-54.31	-56.47	0.15	78.35	226.12	451326.78	700500.64	N 32 14 23.01	W 103 49 6.76
	2823.00	0.08	239.40	2820.50	53.62	-54.39	-56.51	0.10	78.43	226.09	451326.70	700500.61	N 32 14 23.01	W 103 49 6.76
	2918.00	0.08	262.48	2915.50	53.66	-54.43	-56.63	0.03	78.55	226.13	451326.66	700500.48	N 32 14 23.01	W 103 49 6.76
	3013.00	0.11	306.26	3010.50	53.61	-54.39	-56.77	0.08	78.62	226.23	451326.70	700500.34	N 32 14 23.01	W 103 49 6.76
	3108.00	0.10	204.89	3105.50	53.63	-54.41	-56.88	0.17	78.71	226.27	451326.68	700500.24	N 32 14 23.01	W 103 49 6.76
	3203.00	0.09	182.56	3200.50	53.78	-54.56	-56.92	0.04	78.84	226.21	451326.53	700500.20	N 32 14 23.01	W 103 49 6.76
	3298.00	0.09	222.13	3295.50	53.91	-54.69	-56.97	0.06	78.97	226.17	451326.40	700500.14	N 32 14 23.00	W 103 49 6.76
	3393.00	0.03	227.08	3390.50	53.98	-54.76	-57.04	0.06	79.07	226.17	451326.33	700500.08	N 32 14 23.00	W 103 49 6.76
	3488.00	0.22	62.69	3485.50	53.91	-54.70	-56.89	0.26	78.92	226.13	451326.40	700500.22	N 32 14 23.00	W 103 49 6.76
	3584.00	0.36	160.21	3581.50	54.12	-54.86	-56.63	0.46	78.87	225.89	451326.20	700500.49	N 32 14 23.00	W 103 49 6.76
	3679.00	0.18	134.34	3676.49	54.51	-55.28	-56.42	0.22	78.99	225.59	451325.81	700500.69	N 32 14 23.00	W 103 49 6.75
	3774.00	0.14	138.97	3771.49	54.70	-55.47	-56.24	0.04	78.99	225.39	451325.62	700500.88	N 32 14 23.00	W 103 49 6.75
	3869.00	0.44	162.68	3866.49	55.14	-55.91	-56.05	0.33	79.17	225.07	451325.19	700501.06	N 32 14 22.99	W 103 49 6.75
	3964.00	0.06	188.52	3961.49	55.54	-56.30	-55.95	0.41	79.38	224.82	451324.79	700501.16	N 32 14 22.99	W 103 49 6.75
	4059.00	0.09	99.61	4056.49	55.60	-56.37	-55.89	0.11	79.38	224.75	451324.73	700501.23	N 32 14 22.99	W 103 49 6.75
	4154.00	0.07	125.37	4151.49	55.65	-56.41	-55.77	0.04	79.32	224.67	451324.68	700501.35	N 32 14 22.99	W 103 49 6.75
	4249.00	0.08	61.81	4246.49	55.65	-56.41	-55.66	0.08	79.25	224.61	451324.68	700501.45	N 32 14 22.99	W 103 49 6.75
	4343.00	0.12	125.17	4340.49	55.68	-56.44	-55.52	0.12	79.17	224.53	451324.65	700501.59	N 32 14 22.99	W 103 49 6.74
	4439.00	0.08	39.86	4436.49	55.69	-56.45	-55.40	0.14	79.09	224.46	451324.65	700501.72	N 32 14 22.99	W 103 49 6.74
	4534.00	0.09	109.27	4531.49	55.66	-56.42	-55.28	0.10	78.99	224.42	451324.67	700501.83	N 32 14 22.99	W 103 49 6.74
	4628.00	0.07	55.55	4625.49	55.66	-56.41	-55.17	0.08	78.90	224.36	451324.68	700501.95	N 32 14 22.99	W 103 49 6.74
	4723.00	0.05	117.93	4720.49	55.64	-56.40	-55.08	0.07	78.83	224.32	451324.69	700502.03	N 32 14 22.99	W 103 49 6.74
	4819.00	0.06	83.28	4816.49	55.66	-56.41	-54.99	0.04	78.78	224.27	451324.68	700502.12	N 32 14 22.99	W 103 49 6.74
	4915.00	0.09	349.78	4912.49	55.58	-56.33	-54.96	0.12	78.70	224.29	451324.76	700502.16	N 32 14 22.99	W 103 49 6.74
	5009.00	0.07	82.38	5006.49	55.50	-56.25	-54.91	0.12	78.61	224.31	451324.84	700502.20	N 32 14 22.99	W 103 49 6.74
	5104.00	0.08	317.95	5101.49	55.44	-56.20	-54.90	0.14	78.56	224.33	451324.90	700502.21	N 32 14 22.99	W 103 49 6.74
	5199.00	0.10	276.83	5196.49	55.38	-56.14	-55.03	0.07	78.61	224.43	451324.96	700502.09	N 32 14 22.99	W 103 49 6.74
	5294.00	0.08	235.54	5291.49	55.41	-56.16	-55.16	0.07	78.72	224.49	451324.93	700501.95	N 32 14 22.99	W 103 49 6.74
	5389.00	0.11	311.98	5386.49	55.38	-56.14	-55.28	0.13	78.79	224.56	451324.98	700501.83	N 32 14 22.99	W 103 49 6.74
	5484.00	0.10	8.66	5481.49	55.24	-56.00	-55.34	0.11	78.73	224.66	451325.10	700501.77	N 32 14 22.99	W 103 49 6.74
	5579.00	0.03	24.47	5576.49	55.13	-55.89	-55.32	0.08	78.64	224.70	451325.20	700501.79	N 32 14 22.99	W 103 49 6.74
	5674.00	0.06	301.67	5671.49	55.08	-55.84	-55.35	0.07	78.63	224.75	451325.25	700501.76	N 32 14 22.99	W 103 49 6.74
	5769.00	0.02	88.79	5766.49	55.06	-55.82	-55.38	0.08	78.63	224.77	451325.28	700501.74	N 32 14 22.99	W 103 49 6.74
	5864.00	0.05	325.11	5861.49	55.02	-55.78	-55.38	0.07	78.61	224.79	451325.31	700501.73	N 32 14 22.99	W 103 49 6.74

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (NUS)	Easting (EUS)	Latitude (N/S °'")	Longitude (E/W °'")
	9381.00	5.70	61163	9369.95	-13.87	15.25	101.60	0.73	102.74	81.46	451396.34	700658.71	N 32 14 23.69	W 103 49 4.91
	9476.00	6.43	68.72	9464.42	-17.91	19.42	110.71	1.10	112.40	80.05	451400.51	700667.81	N 32 14 23.73	W 103 49 4.80
	9572.00	6.94	67.99	9559.77	-21.90	23.55	121.10	0.54	123.36	79.00	451404.64	700678.20	N 32 14 23.77	W 103 49 4.68
	9667.00	6.00	61.06	9654.16	-26.32	28.10	130.76	1.28	133.75	77.87	451409.19	700687.86	N 32 14 23.82	W 103 49 4.57
	9762.00	7.16	69.65	9748.54	-30.64	32.56	140.66	1.60	144.38	76.97	451413.65	700697.76	N 32 14 23.86	W 103 49 4.46
	9857.00	7.03	76.96	9842.81	-33.86	35.93	151.87	0.96	156.07	76.69	451417.02	700708.97	N 32 14 23.89	W 103 49 4.32
	9952.00	7.73	9637.03	9937.03	-36.46	38.69	163.76	0.74	168.27	76.71	451419.78	700720.86	N 32 14 23.92	W 103 49 4.19
	10047.00	7.42	66.93	10031.20	-40.14	42.54	175.63	1.42	180.71	76.38	451423.63	700732.73	N 32 14 23.96	W 103 49 4.05
	10142.00	7.40	62.76	10125.41	-45.19	47.74	186.71	0.57	192.72	75.66	451428.83	700743.81	N 32 14 24.01	W 103 49 3.92
	10237.00	7.35	63.66	10219.62	-50.54	53.24	197.60	0.13	204.64	74.92	451434.33	700754.69	N 32 14 24.06	W 103 49 3.79
Actual KOP	10332.00	7.77	58.19	10313.80	-56.47	59.32	208.50	0.88	216.77	74.12	451440.41	700765.60	N 32 14 24.12	W 103 49 3.66
	10427.00	7.48	56.98	10407.96	-63.08	66.08	219.14	0.35	228.89	73.22	451447.16	700776.24	N 32 14 24.19	W 103 49 3.54
	10522.00	7.53	63.68	10502.15	-69.05	72.19	229.87	0.92	240.94	72.57	451453.27	700786.97	N 32 14 24.25	W 103 49 3.41
	10617.00	7.86	63.29	10596.34	-74.44	78.74	240.97	0.08	253.20	72.12	451458.81	700796.07	N 32 14 24.30	W 103 49 3.29
	10712.00	7.86	52.16	10690.49	-81.07	84.51	251.66	1.80	265.47	71.44	451465.59	700808.76	N 32 14 24.37	W 103 49 3.16
	10791.00	6.60	45.87	10768.86	-87.44	90.99	259.19	1.88	274.69	70.66	451472.07	700816.28	N 32 14 24.43	W 103 49 3.07
	10886.00	3.93	87.58	10863.48	-91.29	94.93	266.36	4.74	282.77	70.38	451476.01	700823.46	N 32 14 24.47	W 103 49 2.99
	10981.00	2.15	144.38	10958.36	-89.92	93.61	270.65	3.46	286.39	70.02	451479.04	700827.75	N 32 14 24.46	W 103 49 2.94
	11076.00	2.20	167.95	11053.29	-86.67	90.38	272.07	0.94	288.69	71.62	451471.47	700829.17	N 32 14 24.42	W 103 49 2.92
	11077.00	2.28	167.76	11054.29	-86.63	90.34	272.08	0.86	288.69	71.63	451471.43	700829.17	N 32 14 24.42	W 103 49 2.92
Wolfcamp Intersection	11171.00	9.66	163.71	11147.72	-77.18	80.94	274.69	7.86	286.37	73.58	451482.02	700831.79	N 32 14 24.33	W 103 49 2.89
	11266.00	17.39	168.84	11240.02	-55.51	59.32	279.68	8.23	285.91	78.02	451440.41	700836.78	N 32 14 24.12	W 103 49 2.84
	11361.00	23.56	188.53	11329.08	-22.74	26.55	279.62	9.65	280.87	84.58	451407.64	700836.71	N 32 14 23.79	W 103 49 2.84
	11456.00	31.76	201.60	11413.23	-19.23	-15.58	267.56	10.69	268.02	93.33	451365.51	700824.66	N 32 14 23.38	W 103 49 2.98
	11524.40	34.52	206.26	11470.50	53.15	-49.71	252.36	4.59	257.21	101.14	451331.38	700809.45	N 32 14 23.04	W 103 49 3.16
	11551.00	34.52	207.89	11492.27	66.67	-63.33	245.40	5.49	263.44	104.47	451317.77	700802.49	N 32 14 22.91	W 103 49 3.24
	11645.00	49.02	214.01	11561.63	120.10	-117.21	212.58	14.88	212.75	118.87	451263.89	700798.67	N 32 14 22.37	W 103 49 3.63
	11740.00	61.48	213.32	11615.68	184.36	-182.07	169.42	13.13	248.70	137.06	451199.03	700726.52	N 32 14 21.73	W 103 49 4.13
	11835.00	69.69	205.22	11654.97	259.19	-257.48	127.39	11.61	287.27	153.68	451123.63	700684.49	N 32 14 20.99	W 103 49 4.63
	11930.00	76.68	195.07	11682.50	344.00	-342.72	96.27	12.59	355.99	164.31	451038.39	700653.38	N 32 14 20.15	W 103 49 4.99
100' FNL Crossing	11962.00	79.09	190.84	11689.22	374.39	-373.20	89.27	14.97	383.73	166.55	451007.97	700646.37	N 32 14 19.85	W 103 49 5.08
	12025.00	83.99	182.69	11696.50	436.09	-435.01	81.97	14.97	442.67	169.33	450994.16	700639.07	N 32 14 19.23	W 103 49 5.16
	12120.00	91.09	178.64	11702.57	530.94	-529.84	81.37	8.93	536.05	171.27	450851.29	700638.48	N 32 14 18.30	W 103 49 5.18
	12188.00	90.28	176.66	11701.76	598.88	-597.80	83.33	1.50	603.58	172.06	450783.32	700640.44	N 32 14 17.62	W 103 49 5.16
	12271.00	89.19	178.52	11702.14	681.88	-680.78	85.37	1.32	686.11	172.85	450700.36	700642.48	N 32 14 16.80	W 103 49 5.14
	12366.00	92.07	178.98	11701.10	776.86	-775.74	87.44	3.07	780.65	173.57	450605.40	700644.55	N 32 14 15.86	W 103 49 5.12
	12461.00	92.05	178.35	11697.68	871.79	-870.65	89.66	0.76	875.25	174.12	450510.50	700646.76	N 32 14 14.92	W 103 49 5.10
	12556.00	92.30	177.67	11694.08	966.70	-965.52	92.95	0.66	969.99	174.50	450415.63	700650.06	N 32 14 13.99	W 103 49 5.07
	12651.00	91.95	177.24	11690.56	1061.59	-1060.50	97.17	0.58	1064.81	174.76	450320.79	700654.27	N 32 14 13.05	W 103 49 5.02
	12746.00	91.95	176.36	11687.32	1156.45	-1155.16	102.47	0.93	1159.70	174.93	450226.00	700659.57	N 32 14 12.11	W 103 49 4.97
	12841.00	92.24	176.94	11683.85	1251.29	-1249.93	108.02	0.68	1254.59	175.06	450131.24	700665.12	N 32 14 11.17	W 103 49 4.91
	12936.00	92.84	177.47	11679.64	1346.14	-1344.73	112.64	0.84	1349.44	175.21	450036.45	700669.75	N 32 14 10.23	W 103 49 4.86
	13031.00	92.26	177.82	11675.41	1441.01	-1439.55	116.54	0.71	1444.26	175.37	449941.63	700673.65	N 32 14 9.29	W 103 49 4.82
	13126.00	89.74	175.88	11673.76	1535.90	-1534.38	121.76	3.35	1539.21	175.46	449846.81	700678.87	N 32 14 8.35	W 103 49 4.76
	13221.00	88.74	175.06	11670.63	1630.82	-1629.63	126.74	1.57	1634.15	175.55	449750.25	700683.99	N 32 14 7.42	W 103 49 4.74
	13316.00	88.68	176.77	11676.38	1725.75	-1724.19	126.10	4.99	1728.80	175.82	449657.01	700683.20	N 32 14 6.48	W 103 49 4.72
	13411.00	89.72	185.51	11677.70	1820.38	-1818.93	119.24	3.08	1822.83	176.25	449562.28	700676.34	N 32 14 5.54	W 103 49 4.81
	13506.00	91.21	182.02	11676.93	1915.06	-1913.70	113.00	3.99	1917.03	176.62	449467.51	700670.11	N 32 14 4.60	W 103 49 4.89
	13601.00	91.21	180.46	11674.93	2009.98	-2008.65	110.95	1.64	2011.72	176.84	449372.56	700668.05	N 32 14 3.66	W 103 49 4.92
	13696.00	90.58	180.09	11673.44	2104.95	-2103.84	110.49	0.77	2106.54	176.99	449277.58	700667.59	N 32 14 2.72	W 103 49 4.93
	13791.00	91.36	180.76	11672.69	2199.94	-2198.64	110.21	0.68	2201.60	177.13	449182.59	700667.31	N 32 14 1.78	W 103 49 4.95
	13886.00	90.86	178.69	11671.68	2294.93	-2293.63	111.09	1.73	2296.31	177.23	449087.61	700668.19	N 32 14 0.94	W 103 49 4.93
	13981.00	91.26	177.86	11669.93	2389.90	-2388.56	113.95	0.97	2391.28	177.27	448992.68	700671.05	N 32 13 59.90	W 103 49 4.90
	14076.00	90.85	176.33	11668.18	2484.81	-2483.42	118.76	1.67	2486.26	177.26	448897.82	700675.86	N 32 13 58.96	W 103 49 4.85
	14171.00	88.41	175.06	11668.79	2579.62	-2578.14	125.89	2.90	2581.22	177.20	448803.11	700682.99	N 32 13 58.03	W 103 49 4.77
	14266.00	86.32	176.06	11673.16	2674.32	-2672.75	133.24	2.44	2676.07	177.21	448708.51	700690.34	N 32 13 57.09	W 103 49 4.69
	14362.00	87.46	181.93	11670.13	2770.13	-2768.55	137.40	6.22	2771.62	177.15	448616.71	700692.02	N 32 13 56.14	W 103 49 4.68
	14457.00	90.21	184.55	11668.30	2864.86	-2863.36	129.56	1.80	2866.29	177.41	448521.99	700696.65	N 32 13 55.20	W 103 49 4.75
	14552.00	91.69	185.40	11678.73	2959.37	-2957.99	121.31	1.80	2960.48	177.65	448423.29	700678.41	N 32 13 54.27	W 103 49 4.85
	14647.00	91.82	184.70	11675.82	3053.83	-3052.58	112.95	0.75	3054.66	177.88	448328.71	700670.06	N 32 13 53.33	W 103 49 4.95
	14742.00	91.69	184.34	11672.91	3148.38	-3147.24	105.47	0.40	3149.00	178.08	448234.06	700662.57	N 32 13 52.40	W 103 49 5.04
	14837.00	91.52	183.18	11670.25	3243.04	-3241.99	99.24	1.23	3243.51	178.25	448139.30	700656.35	N 32 13 51.46	W 103 49 5.12
	14932.00	91.71	180.76	11667.57	3337.89	-3336.89	95.98	2.55	3338.27	178.35	448044.41	700653.08	N 32 13 50.52	W 103 49 5.16
	15027.00	91.36	180.76	11665.85	3432.85	-3431.85	93.45	2.39	3433.26	178.39	447949.45	700649.39	N 32 13 49.59	W 103 49 5.17
	15122.00	91.44	176.53	11663.75	3527.78	-3526.75	99.88	2.60	3528.16	178.38	447854.57	700656.98	N 32 13 48.64	W 103 49 5.13

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
Final MWD Survey 100' FSL Crossing Proj to TD	21962.00	89.27	178.41	11730.29	10261.30	-10260.48	130.21	0.99	10261.31	179.27	441121.26	700687.32	N 32 12 42.01	W 103 49 5.15
	21957.00	88.86	179.71	11731.84	10356.29	-10355.45	131.77	1.43	10356.29	179.27	441026.30	700688.87	N 32 12 41.07	W 103 49 5.14
	22051.00	89.16	179.93	11733.47	10450.27	-10449.44	132.07	0.40	10450.27	179.28	440932.32	700689.17	N 32 12 40.14	W 103 49 5.14
	22145.00	89.26	180.33	11734.76	10544.25	-10543.43	131.85	0.44	10544.25	179.28	440838.33	700688.96	N 32 12 39.21	W 103 49 5.15
	22240.00	88.76	179.04	11736.40	10639.23	-10638.41	132.38	1.46	10639.24	179.29	440743.36	700689.48	N 32 12 38.27	W 103 49 5.15
	22334.00	89.04	179.49	11738.21	10733.21	-10732.39	133.58	0.56	10733.22	179.29	440649.39	700690.68	N 32 12 37.34	W 103 49 5.14
	22343.00	89.04	179.49	11738.36	10742.21	-10741.38	133.66	0.00	10742.22	179.29	440640.39	700690.76	N 32 12 37.25	W 103 49 5.14
	22393.00	89.04	179.49	11739.20	10792.20	-10791.38	134.11	0.00	10792.21	179.29	440590.40	700691.21	N 32 12 36.76	W 103 49 5.14

Survey Type: Def Survey

Survey Error Model: ISCWSA Rev 3 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey
	1	0.000	32.500	1/98.425	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Jeff Smith MDP1 7_18 Fed Com 173H / Oxy Jeff Smith MDP1 7_18 Fed Com 173H Gyro+MWD 0' to
	1	32.500	32.500	Act Stns	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Jeff Smith MDP1 7_18 Fed Com 173H / Oxy Jeff Smith MDP1 7_18 Fed Com 173H Gyro+MWD 0' to
	1	32.500	847.310	Act Stns	26.400	26.400	GYD_GC+DROP+OH	Jeff Smith MDP1 7_18 Fed Com 173H / Oxy Jeff Smith MDP1 7_18 Fed Com 173H Gyro+MWD 0' to
	1	847.310	11551.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS	Jeff Smith MDP1 7_18 Fed Com 173H / Oxy Jeff Smith MDP1 7_18 Fed Com 173H Gyro+MWD 0' to
	1	11551.000	11835.000	Act Stns	26.400	26.400	A009Mb_MWD+IFR1+SAG	Jeff Smith MDP1 7_18 Fed Com 173H / Oxy Jeff Smith MDP1 7_18 Fed Com 173H Gyro+MWD 0' to
	1	11835.000	22393.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS	Jeff Smith MDP1 7_18 Fed Com 173H / Oxy Jeff Smith MDP1 7_18 Fed Com 173H Gyro+MWD 0' to

Well Name: JEFF SMITH MDP1 7-18 FEDERAL C	Well Location: T24S / R31E / SEC 6 / SESW / 32.2398731 / -103.8183596	County or Parish/State: EDDY / NM
Well Number: 173H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM57273, NMNM82904	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001547247	Well Status: Drilling Well	Operator: OXY USA INCORPORATED

Subsequent Report

Sundry ID: 2702732

Type of Submission: Subsequent Report

Date Sundry Submitted: 11/12/2022

Date Operation Actually Began: 07/25/2022

Type of Action: Workover Operations

Time Sundry Submitted: 10:59

Actual Procedure: RUPU 07/25/22, RIH & clean out to PBTD @ 22349', pressure test casing to 7900# for 30 min, good test. RIH & perf @ 12179-22250' Total 1428 holes. Frac in 42 stages w/ 424476BBL Produced Water + 1772BBL Brackish Water (> 1,000 mg/I TDS and 10,000 mg/I TDS) w/ 24916190# sand, RD Liberty 08/06/22. Well ready to produce 08/11/22. 9/19/22 RIH with 2-3/8" L80 tbg & gas lift set @ 11513', RD 9/20/22. Formation Tops for this completion are as follows: Rustler 536'M 536'V Salado 918'M 917'V Bell Canyon 4219'M 4217'V Cherry Canyon 5119'M 5116'V Brushy Canyon 6379'M 6376'V Bone Spring 8051'M 8048'V 1st Bone Spring 9057'M 9048'V 2nd Bone Spring 9735'M 9722'V 3rd Bone Spring 11013'M 10990'V Wolfcamp 11472'M 11427'V

Well Name: JEFF SMITH MDP1 7-18 FEDERAL C	Well Location: T24S / R31E / SEC 6 / SESW / 32.2398731 / -103.8183596	County or Parish/State: EDDY / NM
Well Number: 173H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM57273, NMNM82904	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001547247	Well Status: Drilling Well	Operator: OXY USA INCORPORATED

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a


Operator Electronic Signature: JANA MENDIOLA	Signed on: NOV 12, 2022 10:59 PM
Name: OXY USA INCORPORATED	
Title: Regulatory Coordinator	
Street Address: PO BOX 50250	
City: Midland	State: TX
Phone: (432) 685-5936	
Email address: Janalyn_mendiola@oxy.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: Jonathon W Shepard	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 01/18/2023
Signature: Jonathon Shepard	

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG							1. WELL API NO. 30-015-47247			
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)							2. Type of Lease ☐ STATE ☐ FEE ☒ FED/INDIAN			
							3. State Oil & Gas Lease No.			
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER							5. Lease Name or Unit Agreement Name JEFF SMITH MDP1 7-18 FEDERAL COM			
8. Name of Operator: OXY USA INC.							6. Well Number: 173H			
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710							11. Pool name or Wildcat PURPLE SAGE WOLFCAMP			
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	N	6	24S	31E		275	SOUTH	2256	WEST	EDDY
BH:	N	18	24S	31E		52	SOUTH	2346	WEST	EDDY
13. Date Spudded 04/21/22	14. Date T.D. Reached 07/04/2022		15. Date Rig Released 07/08/2022		16. Date Completed (Ready to Produce) 08/11/2022		17. Elevations (DF and RKB, RT, GR, etc.) 3460' GL			
18. Total Measured Depth of Well 22393'M 11739'V			19. Plug Back Measured Depth 22349'M 11738'V		20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run CBL			
22. Producing Interval(s), of this completion - Top, Bottom, Name 12179-22250' Wolfcamp										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
10.75" J55		45.5		845'		14.75"		1160sx-surf circ		
7.625" HCL80		26.4		10728'		9.875"		2621sx-surf		
5.5" P110 ICY		20		22373'		6.75"		972sx-TOC@10228'		
24. LINER RECORD										
SIZE	TOP	BOTTOM		SACKS CEMENT		SCREEN		25. TUBING RECORD		
								SIZE		
								2-3/8"		
								DEPTH SET		
								11513'		
26. Perforation record (interval, size, and number) 12179-22250' Total 1428 holes, Hole Size=0.42						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						12179-22250'		424476BBL Produced Water + 1772BBL Brackish Water (> 1,000 mg/l TDS and < 10,000 mg/l TDS) w/ 24916190# sand		
28. PRODUCTION										
Date First Production		Production Method (Flowing, gas lift, pumping - Size and type pump)				Well Status (Prod. or Shut-in)				
08/14/2022		Gas Lift				Prod.				
Date of Test	Hours Tested	Choke Size	Prod'n For	Oil - Bbl	Gas - MCF	Water - Bbl.	Gas - Oil Ratio			
08/20/2022	24 hrs.	128/128	Test Period	3162	7140	7765	2258			
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.	Oil Gravity - API - (Corr.)				
	1188		3162	7140	7765					
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD							30. Test Witnessed By			
31. List Attachments WBD										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.							33. Rig Release Date:			
34. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Printed										
Signature: 		Name: <u>Jana Mendiola</u>			Title: <u>Sr. Regulatory Analyst</u>			Date: <u>11/12/2022</u>		
E-mail Address: <u>janalyn_mendiola@oxy.com</u>										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 536'	T. Bell Canyon 4219'	T. Ojo Alamo	T. Penn A"
T. Salado 918'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 5119'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 6379'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Springs 8051'	T. Todilto	
T. Abo	T. 1 st Bone Springs 9057'	T. Entrada	
T. Wolfcamp 11472'	T. 2 nd Bone Springs 9735'	T. Wingate	
T. Penn	T. 3 rd Bone Springs 11013'	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....


No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

OXY USA Inc.
JEFF SMITH MDP1 7-18 FEDERAL COM 173H
API No. 30-015-47247

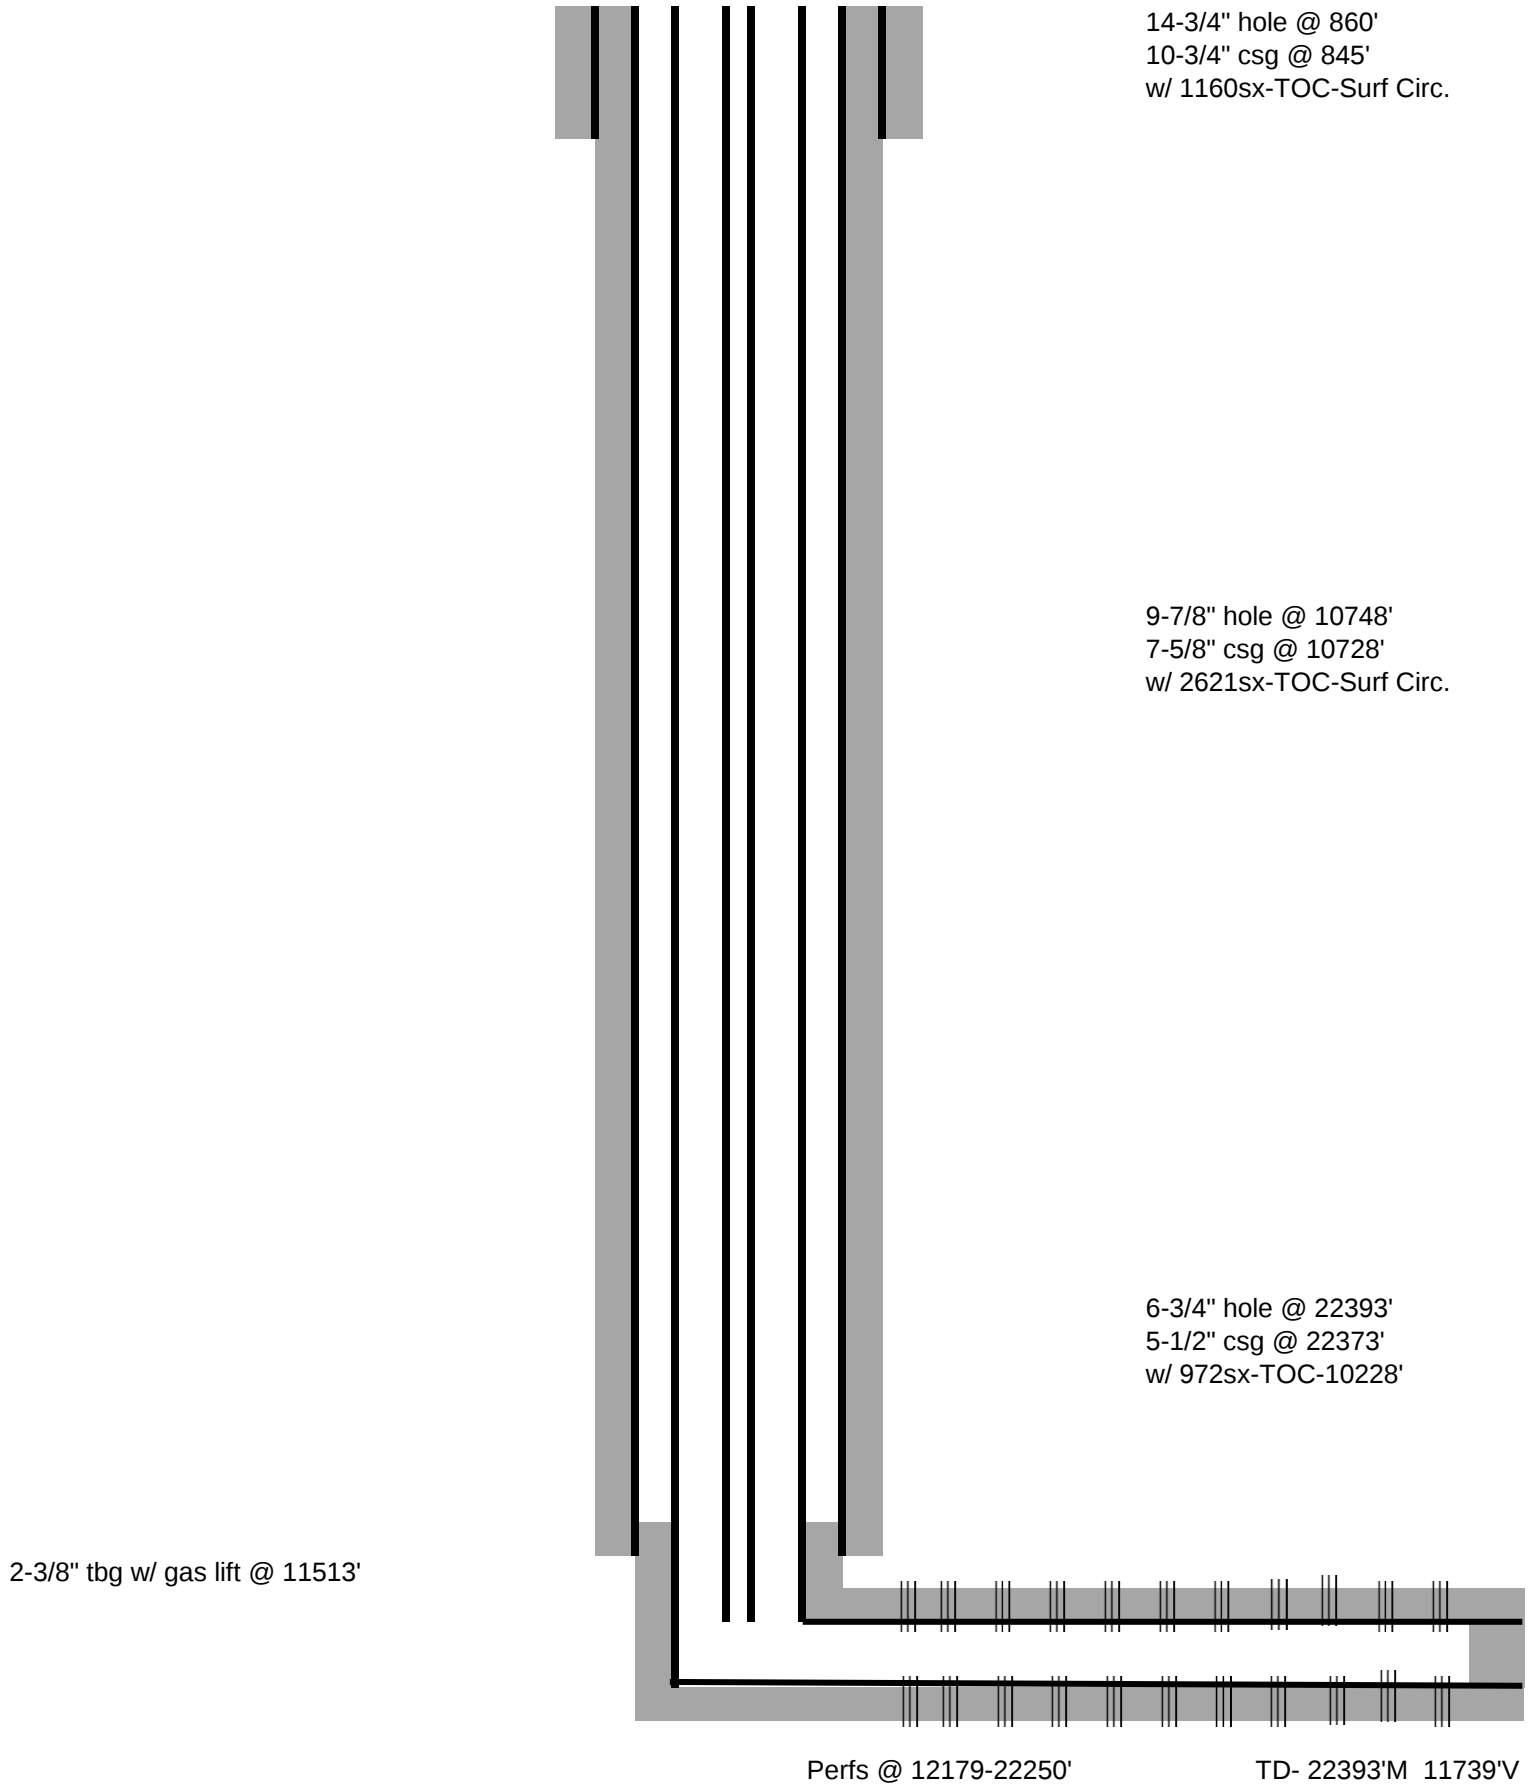

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 158290

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 158290
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 158290

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 158290
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
smcgrath	File 3160-4 within 10 days of BLM Approval	1/19/2023
smcgrath	Upload CBL to OCD Permitting/Well Logs	1/19/2023