

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address OXY USA INC. PO BOX 50250 MIDLAND, TX 79710		² OGRID Number 16696
		³ Reason for Filing Code/ Effective Date RT - 12/24/2022
⁴ API Number 30 - 0 25-48947	⁵ Pool Name Bilbrey Basin Bonespring, South	⁶ Pool Code 97366
⁷ Property Code 332769	⁸ Property Name Dr Pi Federal Unit 17 8 DA	⁹ Well Number 23H

II. Surface Location

UL or lot no. M	Section 17	Township 22S	Range 32E	Lot Idn	Feet from the 530	North/South Line South	Feet from the 1145	East/West line West	County Lea
--------------------	---------------	-----------------	--------------	---------	----------------------	---------------------------	-----------------------	------------------------	---------------

¹¹ Bottom Hole Location

UL or lot no. C	Section 8	Township 22S	Range 32E	Lot Idn	Feet from the 37	North/South line North	Feet from the 2193	East/West line West	County Lea
¹² Lse Code F	¹³ Producing Method Code F	¹⁴ Gas Connection Date TBD	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
237722	Centurion Pipeline, L.P.	O
248749	DCP Midstream, LP	G

IV. Well Completion Data

²¹ Spud Date 10/10/2022	²² Ready Date 12/24/2022	²³ TD 21338 MD, 10594 TVD	²⁴ PBTD 21296 MD, 10594 TVD	²⁵ Perforations 10966-21192	²⁶ DHC, MC
²⁷ Hole Size	²⁸ Casing & Tubing Size	²⁹ Depth Set	³⁰ Sacks Cement		
17 1/2"	13 3/8" 54.5# J55	926'	1150sx -TOC 0'		
12 1/4"	9 5/8" 40# HCL 80	6545'	1499sx- TOC 0'		
8 3/4"	5 1/2" 20# P110	21318'	3381sx - TOC 700'		

V. Well Test Data

³¹ Date New Oil	³² Gas Delivery Date	³³ Test Date	³⁴ Test Length	³⁵ Tbg. Pressure	³⁶ Csg. Pressure
³⁷ Choke Size	³⁸ Oil	³⁹ Water	⁴⁰ Gas		⁴¹ Test Method

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: 	OIL CONSERVATION DIVISION
Printed name: Sarah McKinney	Approved by: PATRICIA MARTINEZ
Title: Regulatory Analyst Sr.	Title: PETROLEUM SPECIALIST
E-mail Address: sarah_mckinney@oxy.com	Approval Date: 1/26/2023
Date: 12/21/2022	Phone: 713-215-7295
RT EXPIRES 3/24/2023	

1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (505) 748-1283 Fax: (505) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-025-48947	² Pool Code 97366	³ Pool Name BILBREY BASIN; BONE SPRING, SOUTH
⁴ Property Code 332769	Property Name DR PI FEDERAL UNIT 17_8 DA	
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁶ Well Number 23H
		⁹ Elevation 3690'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	17	22S	32E		530	SOUTH	1145	WEST	LEA
¹¹ Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	8	22S	32E		37	NORTH	2193	WEST	LEA
¹² Dedicated Acres 640.0	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

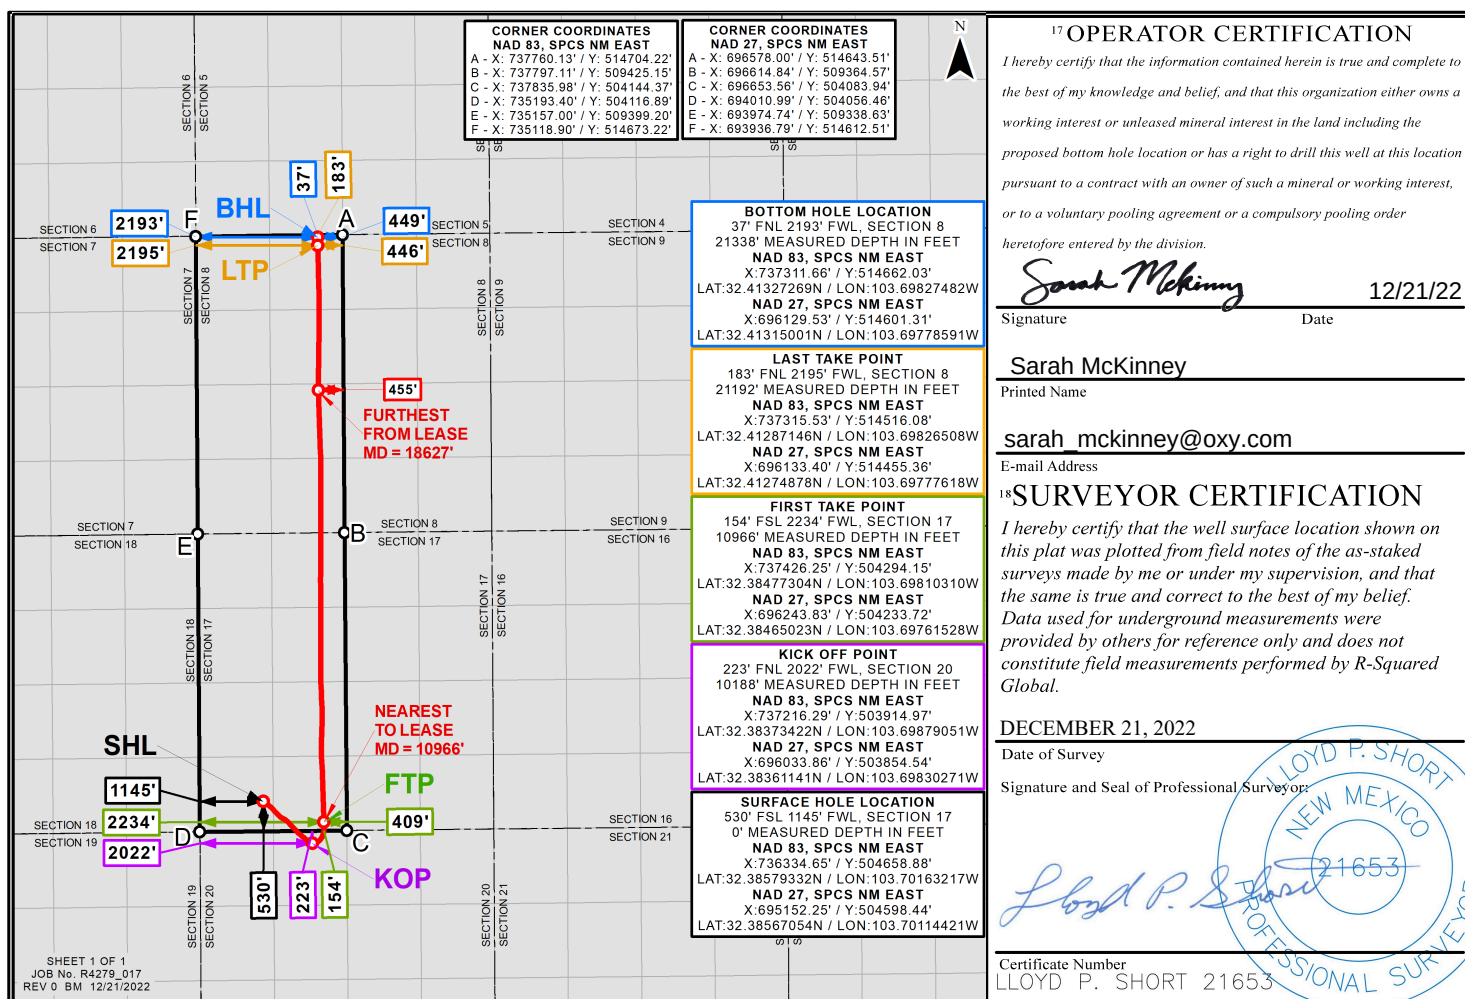

Distances/areas relative to NAD 83 Combined Scale Factor: 0.99995379 Convergence Angle: 00°20'34.080000"



OXY USA INC.

Lea County, NM (NAD83-NME)

Dr Pi Fed Unit 17_8 DA

Dr Pi Fed Unit 17_8 DA 23H

OH / 70783

Design: Surveys (H&P 466)

Standard Survey Report

22 November, 2022





Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Dr Pi Fed Unit 17_8 DA 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3714.70usft (H&P 466)
Site:	Dr Pi Fed Unit 17_8 DA	MD Reference:	RKB @ 3714.70usft (H&P 466)
Well:	Dr Pi Fed Unit 17_8 DA 23H	North Reference:	Grid
Wellbore:	OH / 70783	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 466)	Database:	USA Compass

Project	Lea County, NM (NAD83-NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Dr Pi Fed Unit 17_8 DA		
Site Position:		Northing:	504,610.59 usft
From:	Map	Easting:	738,908.99 usft
Position Uncertainty:	1.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 23' 8.226697 N
		Longitude:	103° 41' 35.857943 W
		Grid Convergence:	0.343 °

Well	Dr Pi Fed Unit 17_8 DA 23H		
Well Position	+N/-S	0.00 usft	Northing: 504,658.88 usft
	+E/-W	0.00 usft	Easting: 736,334.65 usft
Position Uncertainty	1.00 usft	Wellhead Elevation:	usft
		Latitude:	32° 23' 8.855965 N
		Longitude:	103° 42' 5.875816 W
		Ground Level:	3,689.70 usft

Wellbore	OH / 70783				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IFR	10/27/2022	6.667	60.132	47,797.00000000

Design	Surveys (H&P 466)				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	5.61	

Survey Program	Date	11/22/2022			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
25.00	896.49	Gyrodata Gyro Surveys (OH / 70783)	GYD_G003_GC+DROP+	Gyrodata Stationary Tool drop on BHA on open h	
1,007.00	21,338.00	Phoenix MWD Surveys (OH / 70783)	SQC_C705a_MWD+IFR1	OWSG MWD + IFR1 + Sag + FDIR Correction	

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
25.00	0.00	0.00	25.00	0.00	0.00	0.00	0.00	0.00	0.00	
94.93	0.19	304.92	94.93	0.07	-0.10	0.06	0.27	0.27	0.00	
179.52	0.18	105.01	179.52	0.11	-0.08	0.10	0.43	-0.01	189.25	
267.99	0.12	98.18	267.99	0.06	0.14	0.08	0.07	-0.07	-7.72	
362.25	0.51	113.68	362.25	-0.12	0.63	-0.06	0.42	0.41	16.44	
456.46	0.47	106.52	456.45	-0.40	1.38	-0.26	0.08	-0.04	-7.60	
550.76	0.35	118.81	550.75	-0.65	2.00	-0.45	0.16	-0.13	13.03	
644.95	0.31	158.44	644.94	-1.02	2.35	-0.79	0.24	-0.04	42.07	
739.24	0.19	186.88	739.23	-1.41	2.42	-1.17	0.18	-0.13	30.16	



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Dr Pi Fed Unit 17_8 DA 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3714.70usft (H&P 466)
Site:	Dr Pi Fed Unit 17_8 DA	MD Reference:	RKB @ 3714.70usft (H&P 466)
Well:	Dr Pi Fed Unit 17_8 DA 23H	North Reference:	Grid
Wellbore:	OH / 70783	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 466)	Database:	USA Compass

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
833.54	0.03	157.97	833.53	-1.59	2.41	-1.35	0.17	-0.17	-30.66
896.49	0.09	174.78	896.48	-1.66	2.43	-1.41	0.10	0.10	26.70
Tie In									
1,007.00	0.48	20.12	1,006.99	-1.31	2.59	-1.05	0.51	0.35	-139.95
First Phoenix MWD Survey									
1,102.00	0.59	26.95	1,101.98	-0.50	2.95	-0.21	0.13	0.12	7.19
1,197.00	0.61	16.56	1,196.98	0.42	3.32	0.74	0.12	0.02	-10.94
1,291.00	0.69	9.93	1,290.97	1.46	3.56	1.80	0.12	0.09	-7.05
1,386.00	0.68	14.30	1,385.97	2.57	3.80	2.93	0.06	-0.01	4.60
1,480.00	0.54	27.65	1,479.96	3.50	4.14	3.89	0.21	-0.15	14.20
1,575.00	0.53	30.04	1,574.96	4.28	4.57	4.70	0.03	-0.01	2.52
1,670.00	0.35	11.04	1,669.95	4.94	4.84	5.39	0.24	-0.19	-20.00
1,765.00	0.31	40.30	1,764.95	5.42	5.06	5.89	0.18	-0.04	30.80
1,859.00	0.20	72.86	1,858.95	5.67	5.38	6.17	0.19	-0.12	34.64
1,954.00	0.28	81.18	1,953.95	5.75	5.77	6.29	0.09	0.08	8.76
2,049.00	0.30	112.58	2,048.95	5.69	6.23	6.27	0.17	0.02	33.05
2,144.00	0.20	78.87	2,143.95	5.63	6.62	6.25	0.18	-0.11	-35.48
2,238.00	0.36	108.21	2,237.95	5.57	7.07	6.23	0.22	0.17	31.21
2,333.00	0.36	111.20	2,332.95	5.37	7.63	6.09	0.02	0.00	3.15
2,428.00	0.52	93.98	2,427.94	5.23	8.34	6.02	0.22	0.17	-18.13
2,523.00	0.37	87.43	2,522.94	5.21	9.07	6.07	0.17	-0.16	-6.89
2,618.00	0.46	88.12	2,617.94	5.24	9.76	6.17	0.09	0.09	0.73
2,712.00	0.50	85.49	2,711.93	5.28	10.55	6.29	0.05	0.04	-2.80
2,902.00	0.48	74.67	2,901.93	5.56	12.14	6.72	0.05	-0.01	-5.69
2,997.00	0.44	91.49	2,996.92	5.65	12.89	6.89	0.15	-0.04	17.71
3,092.00	0.68	86.11	3,091.92	5.68	13.82	7.01	0.26	0.25	-5.66
3,186.00	0.72	82.67	3,185.91	5.80	14.96	7.23	0.06	0.04	-3.66
3,281.00	0.53	72.18	3,280.91	6.01	15.97	7.54	0.23	-0.20	-11.04
3,376.00	0.30	205.56	3,375.91	5.92	16.28	7.48	0.81	-0.24	140.40
3,471.00	0.39	172.17	3,470.90	5.37	16.22	6.93	0.23	0.09	-35.15
3,565.00	0.28	114.04	3,564.90	4.96	16.47	6.55	0.36	-0.12	-61.84
3,660.00	0.91	104.31	3,659.90	4.68	17.41	6.36	0.67	0.66	-10.24
3,755.00	1.76	98.80	3,754.87	4.27	19.58	6.16	0.90	0.89	-5.80
3,850.00	1.91	105.67	3,849.82	3.62	22.55	5.81	0.28	0.16	7.23
3,944.00	1.25	116.87	3,943.79	2.73	24.97	5.16	0.77	-0.70	11.91
4,039.00	0.46	132.14	4,038.77	2.01	26.18	4.56	0.86	-0.83	16.07
4,134.00	0.70	204.17	4,133.77	1.22	26.23	3.78	0.75	0.25	75.82
4,228.00	1.16	203.43	4,227.76	-0.17	25.61	2.33	0.49	0.49	-0.79
4,323.00	0.99	181.07	4,322.74	-1.88	25.21	0.60	0.47	-0.18	-23.54
4,418.00	0.36	178.42	4,417.73	-2.99	25.21	-0.52	0.66	-0.66	-2.79
4,512.00	0.78	223.35	4,511.73	-3.76	24.78	-1.32	0.62	0.45	47.80
4,607.00	1.60	245.29	4,606.71	-4.78	23.13	-2.50	0.97	0.86	23.09
4,702.00	1.58	245.87	4,701.67	-5.87	20.73	-3.82	0.03	-0.02	0.61

Phoenix

Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Dr Pi Fed Unit 17_8 DA 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3714.70usft (H&P 466)
Site:	Dr Pi Fed Unit 17_8 DA	MD Reference:	RKB @ 3714.70usft (H&P 466)
Well:	Dr Pi Fed Unit 17_8 DA 23H	North Reference:	Grid
Wellbore:	OH / 70783	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 466)	Database:	USA Compass

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,797.00	1.46	245.51	4,796.64	-6.91	18.43	-5.07	0.13	-0.13	-0.38
4,891.00	0.91	245.57	4,890.62	-7.71	16.66	-6.05	0.59	-0.59	0.06
4,986.00	0.46	147.87	4,985.61	-8.35	16.18	-6.73	1.13	-0.47	-102.84
5,081.00	1.59	120.83	5,080.60	-9.35	17.51	-7.59	1.26	1.19	-28.46
5,176.00	2.31	121.45	5,175.54	-11.02	20.28	-8.99	0.76	0.76	0.65
5,270.00	3.66	128.36	5,269.41	-13.87	24.25	-11.43	1.48	1.44	7.35
5,365.00	4.87	131.05	5,364.15	-18.40	29.66	-15.41	1.29	1.27	2.83
5,460.00	5.57	129.47	5,458.75	-23.98	36.27	-20.32	0.75	0.74	-1.66
5,554.00	7.47	128.80	5,552.14	-30.71	44.55	-26.21	2.02	2.02	-0.71
5,649.00	8.15	128.52	5,646.26	-38.77	54.63	-33.25	0.72	0.72	-0.29
5,744.00	8.87	128.51	5,740.21	-47.53	65.63	-40.88	0.76	0.76	-0.01
5,838.00	10.32	126.05	5,832.90	-56.99	78.11	-49.09	1.60	1.54	-2.62
5,933.00	11.42	126.96	5,926.19	-67.66	92.51	-58.29	1.17	1.16	0.96
6,028.00	12.10	128.07	6,019.20	-79.45	107.86	-68.53	0.75	0.72	1.17
6,123.00	12.47	128.43	6,112.02	-91.97	123.73	-79.43	0.40	0.39	0.38
6,217.00	13.79	130.59	6,203.56	-105.56	140.19	-91.36	1.50	1.40	2.30
6,312.00	14.35	132.77	6,295.71	-120.93	157.43	-104.96	0.81	0.59	2.29
6,407.00	15.21	135.72	6,387.57	-137.84	174.77	-120.10	1.20	0.91	3.11
6,501.00	14.68	136.15	6,478.39	-155.26	191.63	-135.79	0.58	-0.56	0.46
6,665.00	15.65	136.16	6,636.68	-186.20	221.35	-163.68	0.59	0.59	0.01
6,759.00	15.65	135.64	6,727.19	-204.41	239.00	-180.07	0.15	0.00	-0.55
6,854.00	16.02	137.44	6,818.59	-223.23	256.82	-197.06	0.65	0.39	1.89
6,949.00	15.76	136.17	6,909.96	-242.19	274.63	-214.19	0.46	-0.27	-1.34
7,044.00	15.86	133.36	7,001.36	-260.41	293.00	-230.53	0.81	0.11	-2.96
7,139.00	16.10	129.93	7,092.69	-277.78	312.54	-245.90	1.03	0.25	-3.61
7,233.00	16.02	122.26	7,183.04	-293.07	333.50	-259.07	2.26	-0.09	-8.16
7,328.00	15.61	115.35	7,274.45	-305.54	356.14	-269.27	2.03	-0.43	-7.27
7,423.00	15.94	117.10	7,365.87	-316.96	379.31	-278.37	0.61	0.35	1.84
7,517.00	15.31	121.41	7,456.40	-329.30	401.39	-288.50	1.40	-0.67	4.59
7,612.00	15.75	128.92	7,547.94	-343.94	422.13	-301.04	2.17	0.46	7.91
7,707.00	15.47	135.28	7,639.44	-361.05	441.07	-316.21	1.82	-0.29	6.69
7,801.00	15.78	139.04	7,729.97	-379.61	458.27	-333.00	1.13	0.33	4.00
7,896.00	16.08	138.06	7,821.32	-399.15	475.54	-350.76	0.42	0.32	-1.03
7,991.00	15.49	137.08	7,912.74	-418.22	492.97	-368.04	0.68	-0.62	-1.03
8,086.00	15.98	135.47	8,004.18	-436.84	510.78	-384.82	0.69	0.52	-1.69
8,181.00	15.34	135.68	8,095.65	-455.15	528.73	-401.29	0.68	-0.67	0.22
8,275.00	15.72	136.23	8,186.22	-473.24	546.22	-417.59	0.43	0.40	0.59
8,370.00	15.84	135.72	8,277.64	-491.82	564.18	-434.32	0.19	0.13	-0.54
8,465.00	15.34	135.34	8,369.15	-510.04	582.06	-450.71	0.54	-0.53	-0.40
8,560.00	15.86	136.36	8,460.65	-528.37	599.85	-467.21	0.62	0.55	1.07
8,654.00	15.82	134.77	8,551.08	-546.69	617.81	-483.69	0.46	-0.04	-1.69
8,749.00	15.36	133.21	8,642.58	-564.42	636.18	-499.54	0.66	-0.48	-1.64
8,844.00	15.46	132.26	8,734.17	-581.55	654.72	-514.78	0.29	0.11	-1.00
8,938.00	15.77	131.36	8,824.70	-598.42	673.58	-529.72	0.42	0.33	-0.96



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Dr Pi Fed Unit 17_8 DA 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3714.70usft (H&P 466)
Site:	Dr Pi Fed Unit 17_8 DA	MD Reference:	RKB @ 3714.70usft (H&P 466)
Well:	Dr Pi Fed Unit 17_8 DA 23H	North Reference:	Grid
Wellbore:	OH / 70783	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 466)	Database:	USA Compass

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,033.00	15.32	127.48	8,916.23	-614.59	693.23	-543.89	1.19	-0.47	-4.08
9,128.00	15.92	127.85	9,007.72	-630.22	713.48	-557.47	0.64	0.63	0.39
9,222.00	15.40	127.90	9,098.23	-645.79	733.50	-571.01	0.55	-0.55	0.05
9,317.00	15.19	130.71	9,189.86	-661.66	752.89	-584.91	0.81	-0.22	2.96
9,412.00	15.58	132.20	9,281.46	-678.35	771.78	-599.67	0.58	0.41	1.57
9,507.00	12.91	124.66	9,373.54	-692.96	789.96	-612.43	3.42	-2.81	-7.94
9,601.00	8.08	114.18	9,465.95	-701.64	804.64	-619.64	5.50	-5.14	-11.15
9,714.00	5.33	115.97	9,578.16	-707.19	816.60	-623.99	2.44	-2.43	1.58
9,809.00	7.76	121.06	9,672.54	-712.43	826.06	-628.29	2.63	2.56	5.36
9,904.00	9.23	122.29	9,766.49	-719.81	838.00	-634.46	1.56	1.55	1.29
9,998.00	10.48	122.63	9,859.10	-728.45	851.57	-641.73	1.33	1.33	0.36
10,093.00	9.36	120.36	9,952.68	-737.01	865.52	-648.89	1.25	-1.18	-2.39
10,188.00	12.05	107.54	10,046.03	-743.91	881.64	-654.18	3.77	2.83	-13.49
10,233.00	15.80	96.43	10,089.71	-746.01	892.21	-655.24	10.20	8.33	-24.69
10,282.00	20.07	85.37	10,136.33	-746.08	907.24	-653.84	11.11	8.71	-22.57
10,377.00	26.12	64.46	10,223.82	-735.72	942.44	-640.09	10.64	6.37	-22.01
10,440.00	29.10	60.27	10,279.65	-722.14	968.27	-624.05	5.64	4.73	-6.65
10,472.00	29.02	61.13	10,307.62	-714.54	981.82	-615.15	1.33	-0.25	2.69
10,566.00	36.64	43.99	10,386.72	-683.23	1,021.41	-580.13	12.72	8.11	-18.23
10,662.00	50.22	24.61	10,456.58	-628.59	1,056.99	-522.27	19.69	14.15	-20.19
10,755.00	54.36	14.06	10,513.56	-559.29	1,081.11	-450.95	10.01	4.45	-11.34
10,803.88	61.21	7.72	10,539.62	-518.72	1,088.83	-409.82	17.78	14.01	-12.96
SL: 10803.88' MD, 61.21° Inc, 7.72° Azm									
10,850.00	67.91	2.48	10,559.43	-477.28	1,092.47	-368.22	17.78	14.53	-11.37
10,911.48	77.54	359.28	10,577.67	-418.65	1,093.33	-309.79	16.43	15.67	-5.20
FTP: 10911.48' MD, 77.54° Inc, 359.28° Azm									
10,945.00	82.81	357.65	10,583.39	-385.65	1,092.45	-277.03	16.43	15.72	-4.87
11,040.00	89.35	357.69	10,589.88	-291.00	1,088.59	-183.21	6.88	6.88	0.04
11,074.00	89.93	357.72	10,590.09	-257.03	1,087.23	-149.54	1.71	1.71	0.09
11,141.00	90.96	357.71	10,589.57	-190.09	1,084.56	-83.17	1.54	1.54	-0.01
11,235.00	91.30	358.09	10,587.72	-96.17	1,081.12	9.96	0.54	0.36	0.40
11,330.00	91.41	358.00	10,585.47	-1.25	1,077.88	104.11	0.15	0.12	-0.09
11,426.00	91.10	357.81	10,583.37	94.66	1,074.37	199.22	0.38	-0.32	-0.20
11,522.00	90.29	358.26	10,582.20	190.60	1,071.08	294.37	0.97	-0.84	0.47
11,618.00	89.68	358.31	10,582.23	286.56	1,068.20	389.59	0.64	-0.64	0.05
11,713.00	89.39	358.57	10,583.00	381.52	1,065.62	483.84	0.41	-0.31	0.27
11,807.00	89.25	357.63	10,584.11	475.46	1,062.50	577.03	1.01	-0.15	-1.00
11,902.00	89.35	357.24	10,585.27	570.35	1,058.25	671.05	0.42	0.11	-0.41
11,997.00	89.40	356.86	10,586.31	665.22	1,053.36	764.99	0.40	0.05	-0.40
12,091.00	88.99	357.04	10,587.63	759.08	1,048.36	857.91	0.48	-0.44	0.19
12,186.00	89.03	358.19	10,589.27	853.98	1,044.41	951.97	1.21	0.04	1.21
12,280.00	89.70	359.94	10,590.32	947.96	1,042.87	1,045.35	1.99	0.71	1.86
12,375.00	89.65	0.69	10,590.85	1,042.96	1,043.40	1,139.94	0.79	-0.05	0.79



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Dr Pi Fed Unit 17_8 DA 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3714.70usft (H&P 466)
Site:	Dr Pi Fed Unit 17_8 DA	MD Reference:	RKB @ 3714.70usft (H&P 466)
Well:	Dr Pi Fed Unit 17_8 DA 23H	North Reference:	Grid
Wellbore:	OH / 70783	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 466)	Database:	USA Compass

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,470.00	89.62	2.66	10,591.46	1,137.91	1,046.17	1,234.71	2.07	-0.03	2.07
12,565.00	89.91	2.98	10,591.85	1,232.79	1,050.85	1,329.60	0.45	0.31	0.34
12,659.00	90.40	1.91	10,591.59	1,326.71	1,054.86	1,423.45	1.25	0.52	-1.14
12,754.00	90.15	0.36	10,591.14	1,421.68	1,056.74	1,518.16	1.65	-0.26	-1.63
12,849.00	90.09	358.63	10,590.94	1,516.68	1,055.90	1,612.61	1.82	-0.06	-1.82
12,944.00	89.93	358.15	10,590.92	1,611.64	1,053.23	1,706.86	0.53	-0.17	-0.51
13,038.00	89.97	358.60	10,591.01	1,705.60	1,050.57	1,800.11	0.48	0.04	0.48
13,133.00	90.16	357.97	10,590.90	1,800.56	1,047.72	1,894.34	0.69	0.20	-0.66
13,228.00	89.83	357.91	10,590.91	1,895.49	1,044.31	1,988.49	0.35	-0.35	-0.06
13,323.00	89.84	357.87	10,591.18	1,990.43	1,040.81	2,082.63	0.04	0.01	-0.04
13,417.00	89.61	357.79	10,591.63	2,084.36	1,037.25	2,175.76	0.26	-0.24	-0.09
13,512.00	89.45	359.00	10,592.41	2,179.32	1,034.59	2,270.00	1.28	-0.17	1.27
13,607.00	89.78	359.71	10,593.05	2,274.31	1,033.52	2,364.44	0.82	0.35	0.75
13,702.00	89.85	0.06	10,593.35	2,369.31	1,033.33	2,458.96	0.38	0.07	0.37
13,797.00	89.71	0.00	10,593.72	2,464.31	1,033.38	2,553.51	0.16	-0.15	-0.06
13,891.00	89.84	0.25	10,594.09	2,558.31	1,033.59	2,647.08	0.30	0.14	0.27
13,986.00	90.36	0.29	10,593.92	2,653.31	1,034.03	2,741.67	0.55	0.55	0.04
14,081.00	90.34	0.28	10,593.34	2,748.30	1,034.51	2,836.25	0.02	-0.02	-0.01
14,175.00	90.28	0.29	10,592.83	2,842.30	1,034.97	2,929.85	0.06	-0.06	0.01
14,270.00	90.54	359.86	10,592.15	2,937.30	1,035.10	3,024.40	0.53	0.27	-0.45
14,364.00	90.16	0.40	10,591.58	3,031.30	1,035.31	3,117.97	0.70	-0.40	0.57
14,459.00	90.25	359.78	10,591.24	3,126.29	1,035.46	3,212.53	0.66	0.09	-0.65
14,554.00	90.09	359.30	10,590.96	3,221.29	1,034.70	3,307.00	0.53	-0.17	-0.51
14,649.00	89.86	359.59	10,591.00	3,316.29	1,033.78	3,401.45	0.39	-0.24	0.31
14,743.00	89.82	0.08	10,591.26	3,410.28	1,033.51	3,494.97	0.52	-0.04	0.52
14,838.00	89.67	0.39	10,591.68	3,505.28	1,033.90	3,589.55	0.36	-0.16	0.33
14,933.00	89.74	359.89	10,592.17	3,600.28	1,034.13	3,684.12	0.53	0.07	-0.53
15,028.00	89.90	358.83	10,592.47	3,695.27	1,033.07	3,778.55	1.13	0.17	-1.12
15,122.00	89.33	359.11	10,593.10	3,789.26	1,031.38	3,871.92	0.68	-0.61	0.30
15,217.00	89.34	0.20	10,594.21	3,884.25	1,030.81	3,966.40	1.15	0.01	1.15
15,312.00	89.27	0.23	10,595.36	3,979.24	1,031.16	4,060.97	0.08	-0.07	0.03
15,406.00	89.80	0.23	10,596.12	4,073.23	1,031.54	4,154.55	0.56	0.56	0.00
15,501.00	89.20	0.28	10,596.95	4,168.23	1,031.96	4,249.13	0.63	-0.63	0.05
15,595.00	89.30	0.54	10,598.18	4,262.22	1,032.64	4,342.74	0.30	0.11	0.28
15,690.00	88.79	0.42	10,599.76	4,357.20	1,033.43	4,437.35	0.55	-0.54	-0.13
15,785.00	89.28	0.46	10,601.36	4,452.18	1,034.16	4,531.95	0.52	0.52	0.04
15,879.00	88.99	0.06	10,602.78	4,546.17	1,034.59	4,625.52	0.53	-0.31	-0.43
15,974.00	88.37	359.61	10,604.97	4,641.15	1,034.31	4,720.02	0.81	-0.65	-0.47
16,069.00	88.60	359.56	10,607.48	4,736.11	1,033.63	4,814.46	0.25	0.24	-0.05
16,094.75	88.77	359.84	10,608.08	4,761.85	1,033.49	4,840.07	1.26	0.65	1.09
SL: 16094.75' MD, 88.77° Inc, 359.84° Azm									
16,163.00	89.21	0.58	10,609.28	4,830.09	1,033.74	4,908.00	1.26	0.65	1.09
16,258.00	90.67	0.54	10,609.38	4,925.08	1,034.67	5,002.63	1.54	1.54	-0.04
16,353.00	92.52	0.32	10,606.74	5,020.04	1,035.38	5,097.20	1.96	1.95	-0.23



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Dr Pi Fed Unit 17_8 DA 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3714.70usft (H&P 466)
Site:	Dr Pi Fed Unit 17_8 DA	MD Reference:	RKB @ 3714.70usft (H&P 466)
Well:	Dr Pi Fed Unit 17_8 DA 23H	North Reference:	Grid
Wellbore:	OH / 70783	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 466)	Database:	USA Compass

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
16,447.00	91.65	359.04	10,603.32	5,113.97	1,034.86	5,190.63	1.65	-0.93	-1.36
16,542.00	90.46	358.69	10,601.57	5,208.94	1,032.98	5,284.96	1.31	-1.25	-0.37
16,637.00	87.86	359.44	10,602.96	5,303.91	1,031.43	5,379.32	2.85	-2.74	0.79
16,732.00	92.29	1.31	10,602.83	5,398.88	1,032.05	5,473.90	5.06	4.66	1.97
16,826.00	92.32	1.26	10,599.05	5,492.78	1,034.15	5,567.55	0.06	0.03	-0.05
16,921.00	91.05	359.74	10,596.26	5,587.73	1,034.98	5,662.13	2.08	-1.34	-1.60
17,016.00	89.13	0.52	10,596.11	5,682.72	1,035.20	5,756.69	2.18	-2.02	0.82
17,111.00	89.27	0.55	10,597.44	5,777.71	1,036.08	5,851.31	0.15	0.15	0.03
17,205.00	89.40	359.66	10,598.53	5,871.70	1,036.26	5,944.87	0.96	0.14	-0.95
17,300.00	89.91	359.25	10,599.10	5,966.69	1,035.35	6,039.32	0.69	0.54	-0.43
17,395.00	89.10	357.67	10,599.92	6,061.65	1,032.80	6,133.57	1.87	-0.85	-1.66
17,490.00	88.54	356.85	10,601.88	6,156.52	1,028.26	6,227.55	1.05	-0.59	-0.86
17,585.00	90.12	357.36	10,602.99	6,251.39	1,023.46	6,321.49	1.75	1.66	0.54
17,679.00	87.14	358.35	10,605.24	6,345.29	1,019.94	6,414.59	3.34	-3.17	1.05
17,774.00	88.87	358.50	10,608.54	6,440.19	1,017.34	6,508.79	1.83	1.82	0.16
17,869.00	90.32	358.82	10,609.21	6,535.16	1,015.11	6,603.08	1.56	1.53	0.34
17,964.00	89.68	358.38	10,609.21	6,630.13	1,012.79	6,697.37	0.82	-0.67	-0.46
18,059.00	89.61	357.70	10,609.80	6,725.07	1,009.54	6,791.54	0.72	-0.07	-0.72
18,153.00	90.33	358.00	10,609.85	6,819.01	1,006.02	6,884.68	0.83	0.77	0.32
18,248.00	90.27	358.08	10,609.36	6,913.95	1,002.77	6,978.85	0.11	-0.06	0.08
18,343.00	90.53	357.99	10,608.69	7,008.89	999.51	7,073.02	0.29	0.27	-0.09
18,438.00	90.70	357.53	10,607.67	7,103.81	995.80	7,167.13	0.52	0.18	-0.48
18,532.00	90.19	357.84	10,606.94	7,197.73	992.00	7,260.23	0.63	-0.54	0.33
18,627.00	89.68	359.34	10,607.05	7,292.70	989.66	7,354.51	1.67	-0.54	1.58
18,722.00	90.59	0.56	10,606.83	7,387.70	989.58	7,449.05	1.60	0.96	1.28
18,817.00	90.28	0.82	10,606.10	7,482.69	990.72	7,543.69	0.43	-0.33	0.27
18,911.00	90.10	0.47	10,605.79	7,576.68	991.78	7,637.34	0.42	-0.19	-0.37
19,006.00	90.41	0.80	10,605.37	7,671.67	992.84	7,731.98	0.48	0.33	0.35
19,101.00	89.55	0.51	10,605.40	7,766.67	993.92	7,826.62	0.96	-0.91	-0.31
19,195.00	89.72	0.78	10,606.00	7,860.66	994.98	7,920.27	0.34	0.18	0.29
19,290.00	89.78	1.06	10,606.42	7,955.64	996.51	8,014.95	0.30	0.06	0.29
19,385.00	90.07	1.29	10,606.54	8,050.62	998.45	8,109.67	0.39	0.31	0.24
19,479.00	90.35	0.67	10,606.20	8,144.61	1,000.06	8,203.36	0.72	0.30	-0.66
19,574.00	90.62	0.69	10,605.39	8,239.60	1,001.19	8,298.00	0.28	0.28	0.02
19,669.00	90.31	0.50	10,604.62	8,334.59	1,002.17	8,392.64	0.38	-0.33	-0.20
19,764.00	90.32	0.59	10,604.10	8,429.59	1,003.08	8,487.26	0.10	0.01	0.09
19,859.00	90.36	0.56	10,603.54	8,524.58	1,004.03	8,581.90	0.05	0.04	-0.03
19,953.00	90.38	0.53	10,602.93	8,618.57	1,004.93	8,675.53	0.04	0.02	-0.03
20,048.00	90.44	0.48	10,602.25	8,713.57	1,005.76	8,770.15	0.08	0.06	-0.05
20,143.00	90.81	359.96	10,601.21	8,808.56	1,006.13	8,864.72	0.67	0.39	-0.55
20,237.00	90.33	358.98	10,600.28	8,902.55	1,005.26	8,958.18	1.16	-0.51	-1.04
20,332.00	90.68	357.98	10,599.44	8,997.51	1,002.74	9,052.44	1.12	0.37	-1.05
20,427.00	90.12	357.98	10,598.78	9,092.45	999.39	9,146.59	0.59	-0.59	0.00



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Dr Pi Fed Unit 17_8 DA 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3714.70usft (H&P 466)
Site:	Dr Pi Fed Unit 17_8 DA	MD Reference:	RKB @ 3714.70usft (H&P 466)
Well:	Dr Pi Fed Unit 17_8 DA 23H	North Reference:	Grid
Wellbore:	OH / 70783	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 466)	Database:	USA Compass

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
20,522.00	90.33	358.13	10,598.40	9,187.39	996.17	9,240.77	0.27	0.22	0.16
20,616.00	90.50	358.38	10,597.72	9,281.35	993.30	9,333.99	0.32	0.18	0.27
20,711.00	90.25	358.94	10,597.10	9,376.32	991.08	9,428.29	0.65	-0.26	0.59
20,806.00	90.39	358.62	10,596.57	9,471.30	989.06	9,522.62	0.37	0.15	-0.34
20,901.00	90.32	359.02	10,595.98	9,566.27	987.10	9,616.95	0.43	-0.07	0.42
20,995.00	90.41	358.86	10,595.38	9,660.26	985.36	9,710.31	0.20	0.10	-0.17
21,090.00	90.36	358.75	10,594.74	9,755.23	983.38	9,804.64	0.13	-0.05	-0.12
21,185.00	90.06	358.46	10,594.40	9,850.20	981.07	9,898.93	0.44	-0.32	-0.31
21,223.00	90.45	358.48	10,594.23	9,888.19	980.06	9,936.64	1.03	1.03	0.05
Final Phoenix MWD Survey									
21,276.90	90.45	358.48	10,593.80	9,942.07	978.63	9,990.12	0.00	0.00	0.00
LTP: 21276.90' MD, 90.45° Inc, 358.48° Azm									
21,338.00	90.45	358.48	10,593.32	10,003.15	977.01	10,050.74	0.00	0.00	0.00
Projection to TD									


Design Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
896.49	896.48	-1.66	2.43	Tie In
1,007.00	1,006.99	-1.31	2.59	First Phoenix MWD Survey
10,803.88	10,539.62	-518.72	1,088.83	SL: 10803.88' MD, 61.21° Inc, 7.72° Azm
10,911.48	10,577.67	-418.65	1,093.33	FTP: 10911.48' MD, 77.54° Inc, 359.28° Azm
16,094.75	10,608.08	4,761.85	1,033.49	SL: 16094.75' MD, 88.77° Inc, 359.84° Azm
21,223.00	10,594.23	9,888.19	980.06	Final Phoenix MWD Survey
21,276.90	10,593.80	9,942.07	978.63	LTP: 21276.90' MD, 90.45° Inc, 358.48° Azm
21,338.00	10,593.32	10,003.15	977.01	Projection to TD



Project: Lea County, NM (NAD83-NME)
Site: Dr Pi Fed Unit 17_8 DA
Well: Dr Pi Fed Unit 17_8 DA 23H
Wellbore: OH / 70783
Design: Plan 1 10-17-22
Rig: H&P 466




PHOENIX
TECHNOLOGY SERVICES

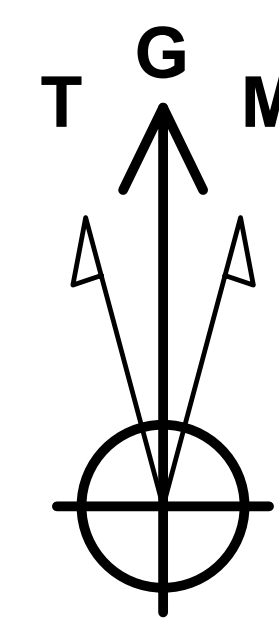

Azimuths to Grid North
True North: -0.34°
Magnetic North: 6.33°
Magnetic Field
Strength: 47797.0nT
Dip Angle: 60.13°
Date: 10/27/2022
Model: IFR

RKB @ 3714.70usft (H&P 466)
Ground Level: 3689.70




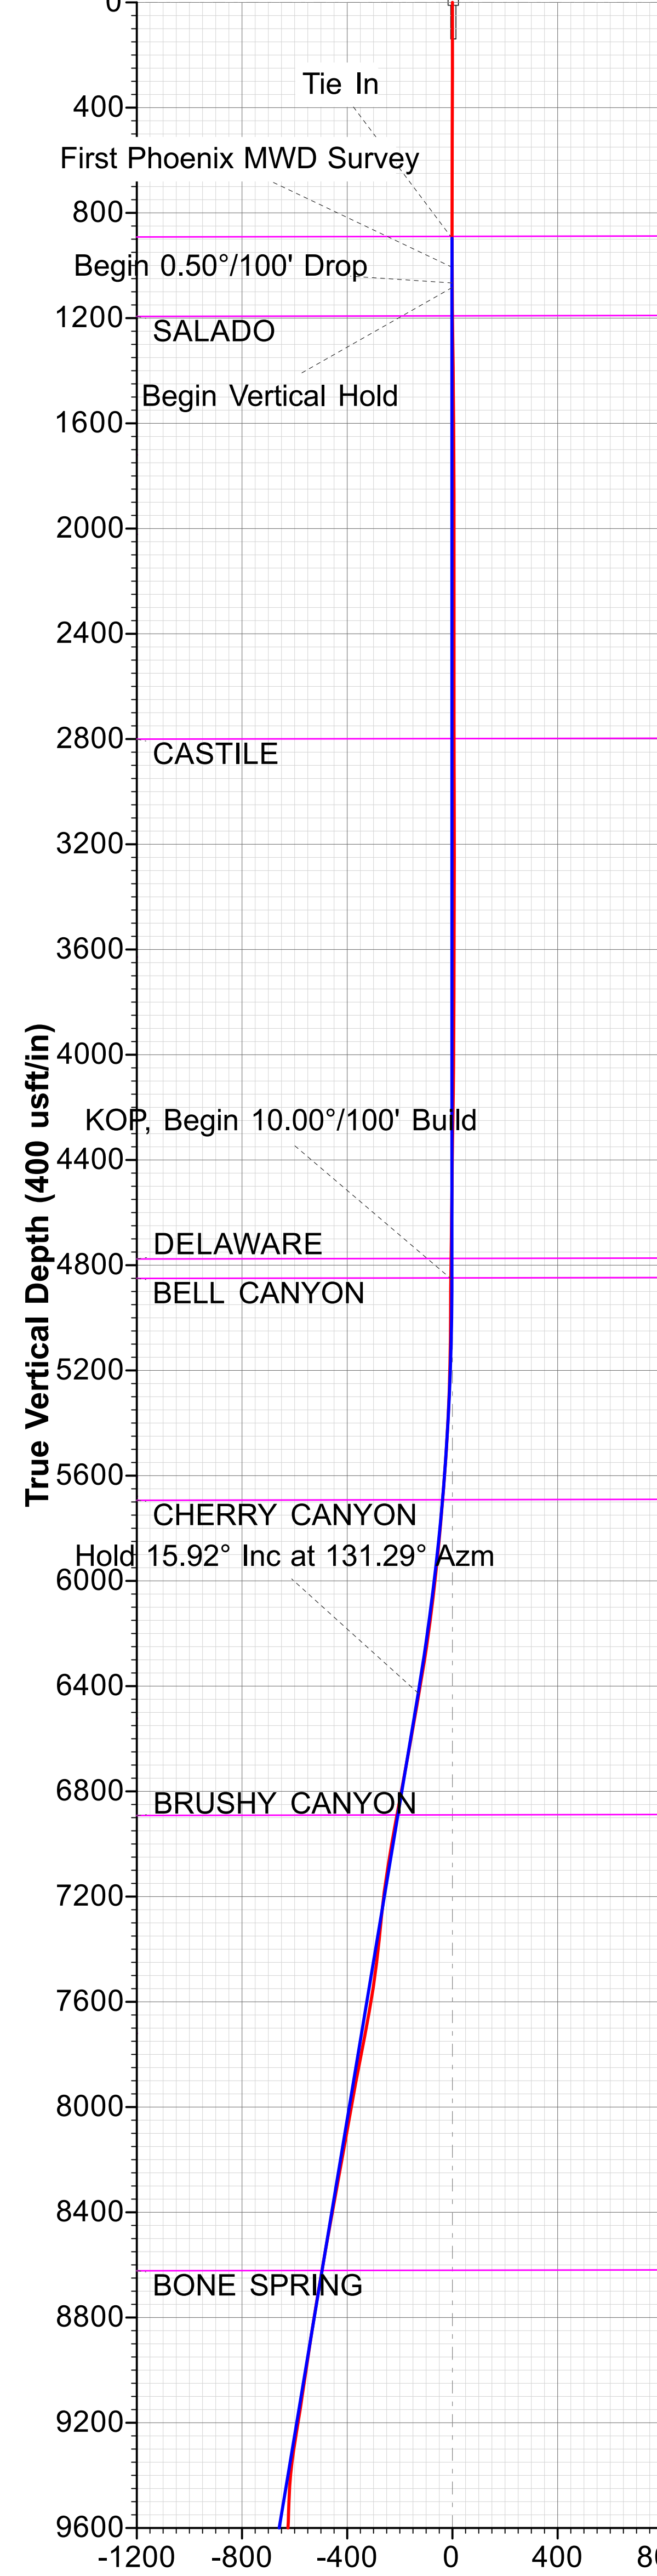


WELL DETAILS							
		Ground Level:		3689.70			
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude		
0.00	0.00	504658.88	736334.65	32° 23' 8.855965 N	103° 42' 5.875816 W		


SECTION DETAILS									
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect
1	896.49	0.09	174.78	896.48	-1.66	2.43	0.00	0.000	-1.41
2	1066.49	0.09	174.78	1066.48	-1.92	2.45	0.00	0.000	-1.67
3	1084.49	0.00	0.00	1084.48	-1.94	2.45	0.50	180.000	-1.69
4	4855.01	0.00	0.00	4855.00	-1.94	2.45	0.00	0.000	-1.69
5	6447.44	15.92	131.29	6427.01	-147.03	167.66	1.00	131.290	-129.94
6	10092.97	15.92	131.29	9932.64	-807.04	919.19	0.00	0.000	-713.34
7	11099.10	90.10	359.60	10595.24	-241.75	1056.63	10.00	-130.563	-137.32
8	21363.26	90.10	359.60	10577.42	10022.14	984.25	0.00	0.000	10070.35
									BHL - DPFU DA 23H

FORMATION TOP DETAILS		
TVDPath	MDPath	Formation
889.70	889.71	RUSTLER
1191.70	1191.71	SALADO
2798.70	2798.71	CASTILE
4774.70	4774.71	DELAWARE
4848.70	4848.71	BELL CANYON
5691.77	5694.78	CHERRY CANYON
6890.06	6928.97	BRUSHY CANYON
8621.56	8729.57	BONE SPRING
9717.88	9869.64	BONE SPRING 1ST
9964.95	10126.41	Second Bone Spring Limestone
10375.74	10572.74	BONE SPRING 2ND
10595.24	11098.90	10595' TVD @ 0° VS 90.1° INC

Map System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone Name: New Mexico Eastern Zone
Local Origin: Well Dr Pi Fed Unit 17_8 DA 23H, Grid North
Latitude: 32° 23' 8.855965 N
Longitude: 103° 42' 5.875816 W
Grid East: 736334.65
Grid North: 504658.88
Scale Factor: 1.000
Geomagnetic Model: IFR
Sample Date: 27-Oct-22
Magnetic Declination: 6.667°
Dip Angle from Horizontal: 60.132°
Magnetic Field Strength: 47797.0000000nT
To convert a Magnetic Direction to a Grid Direction, Add 6.329°
To convert a Magnetic Direction to a True Direction, Add 6.667° East
To convert a True Direction to a Grid Direction, Subtract 0.338°

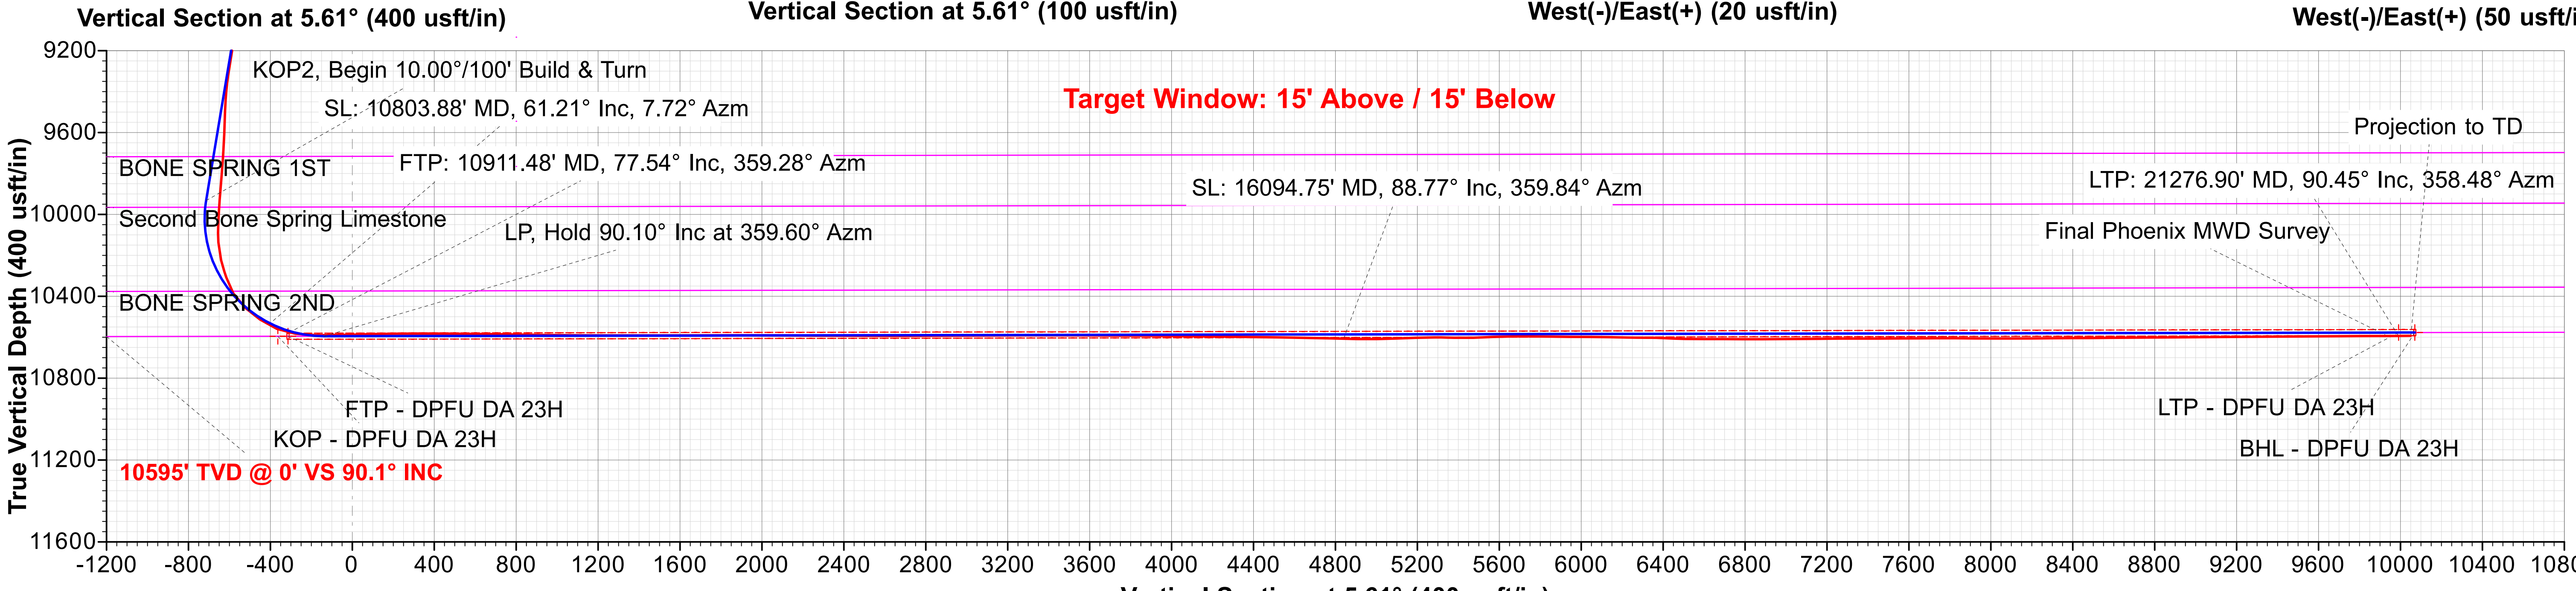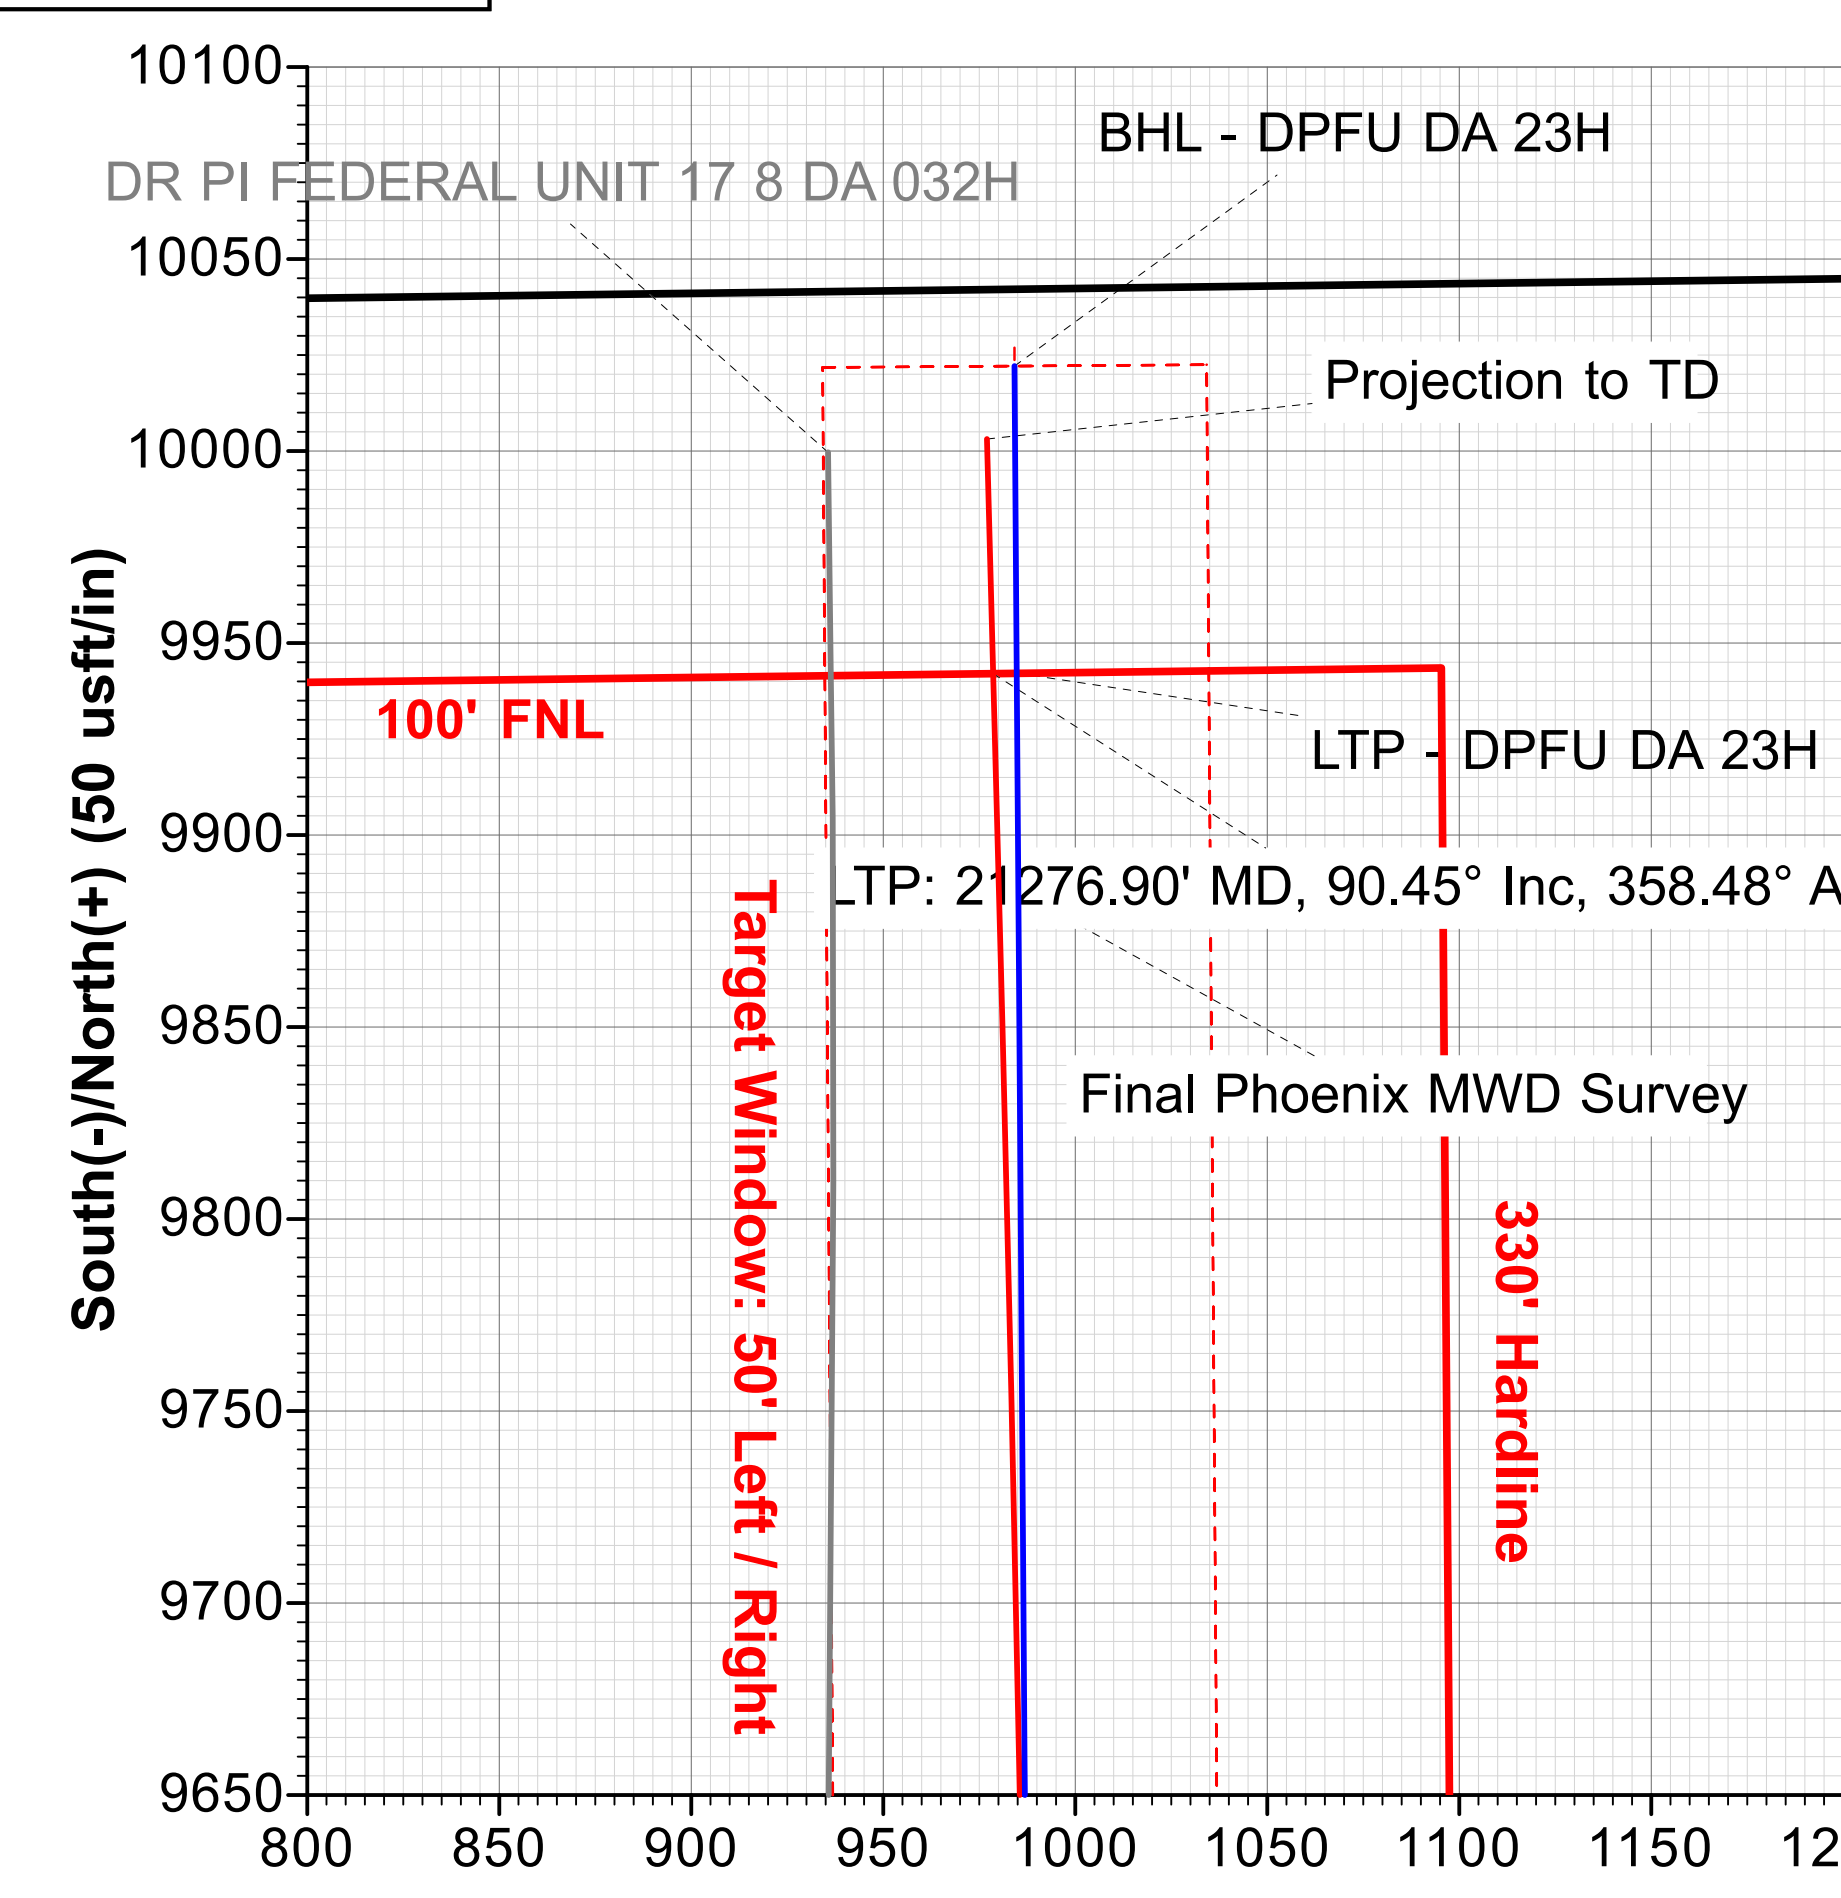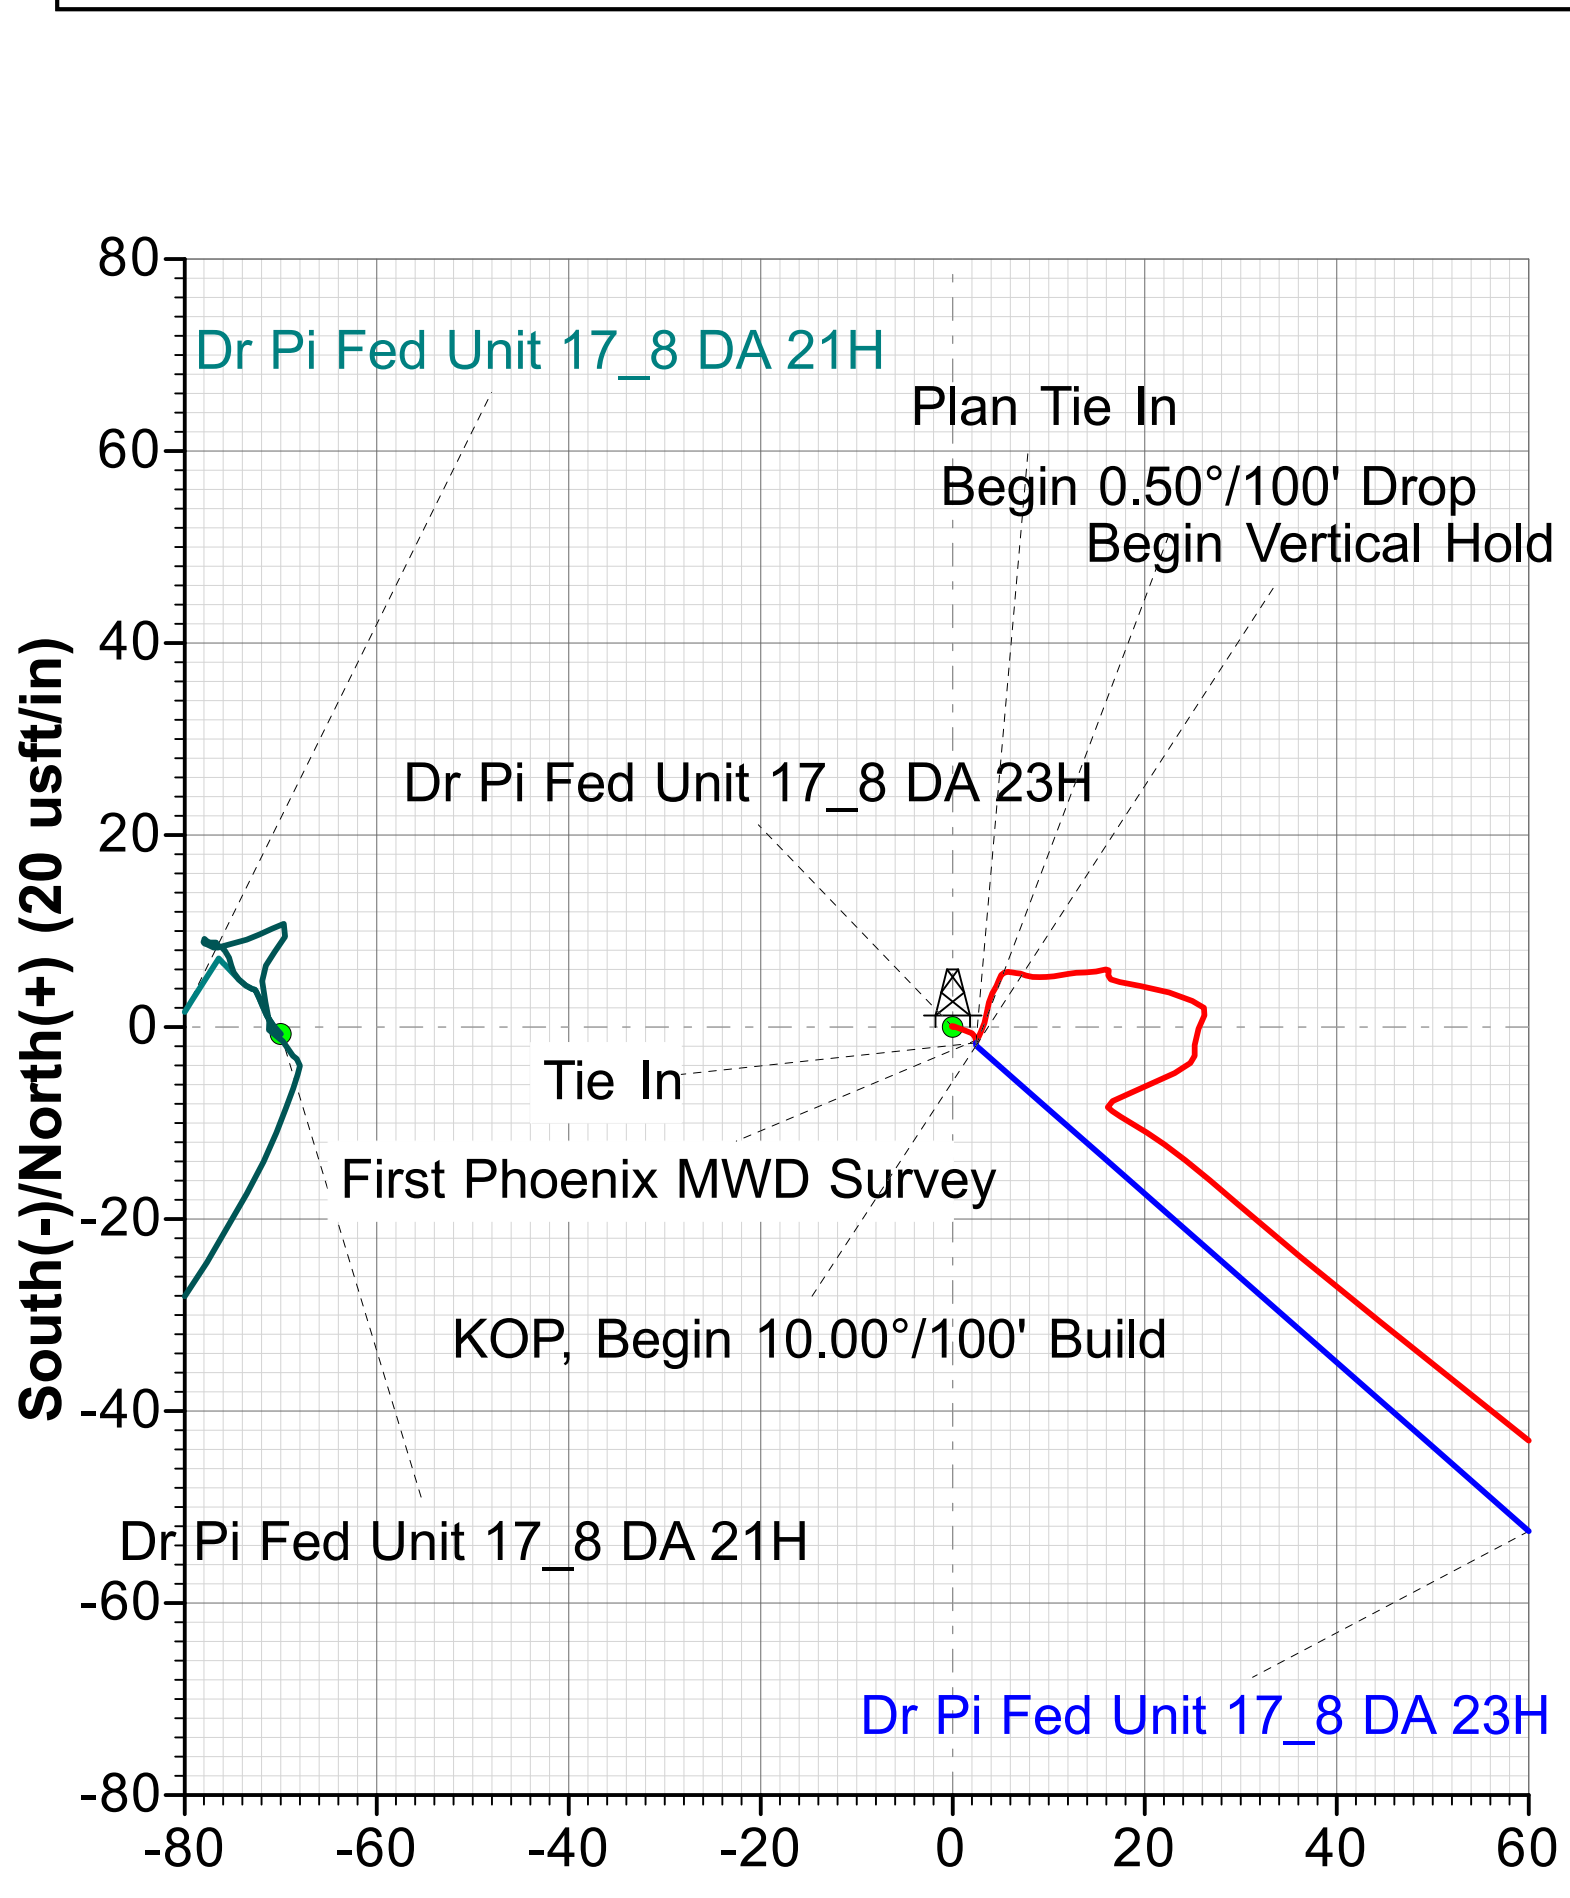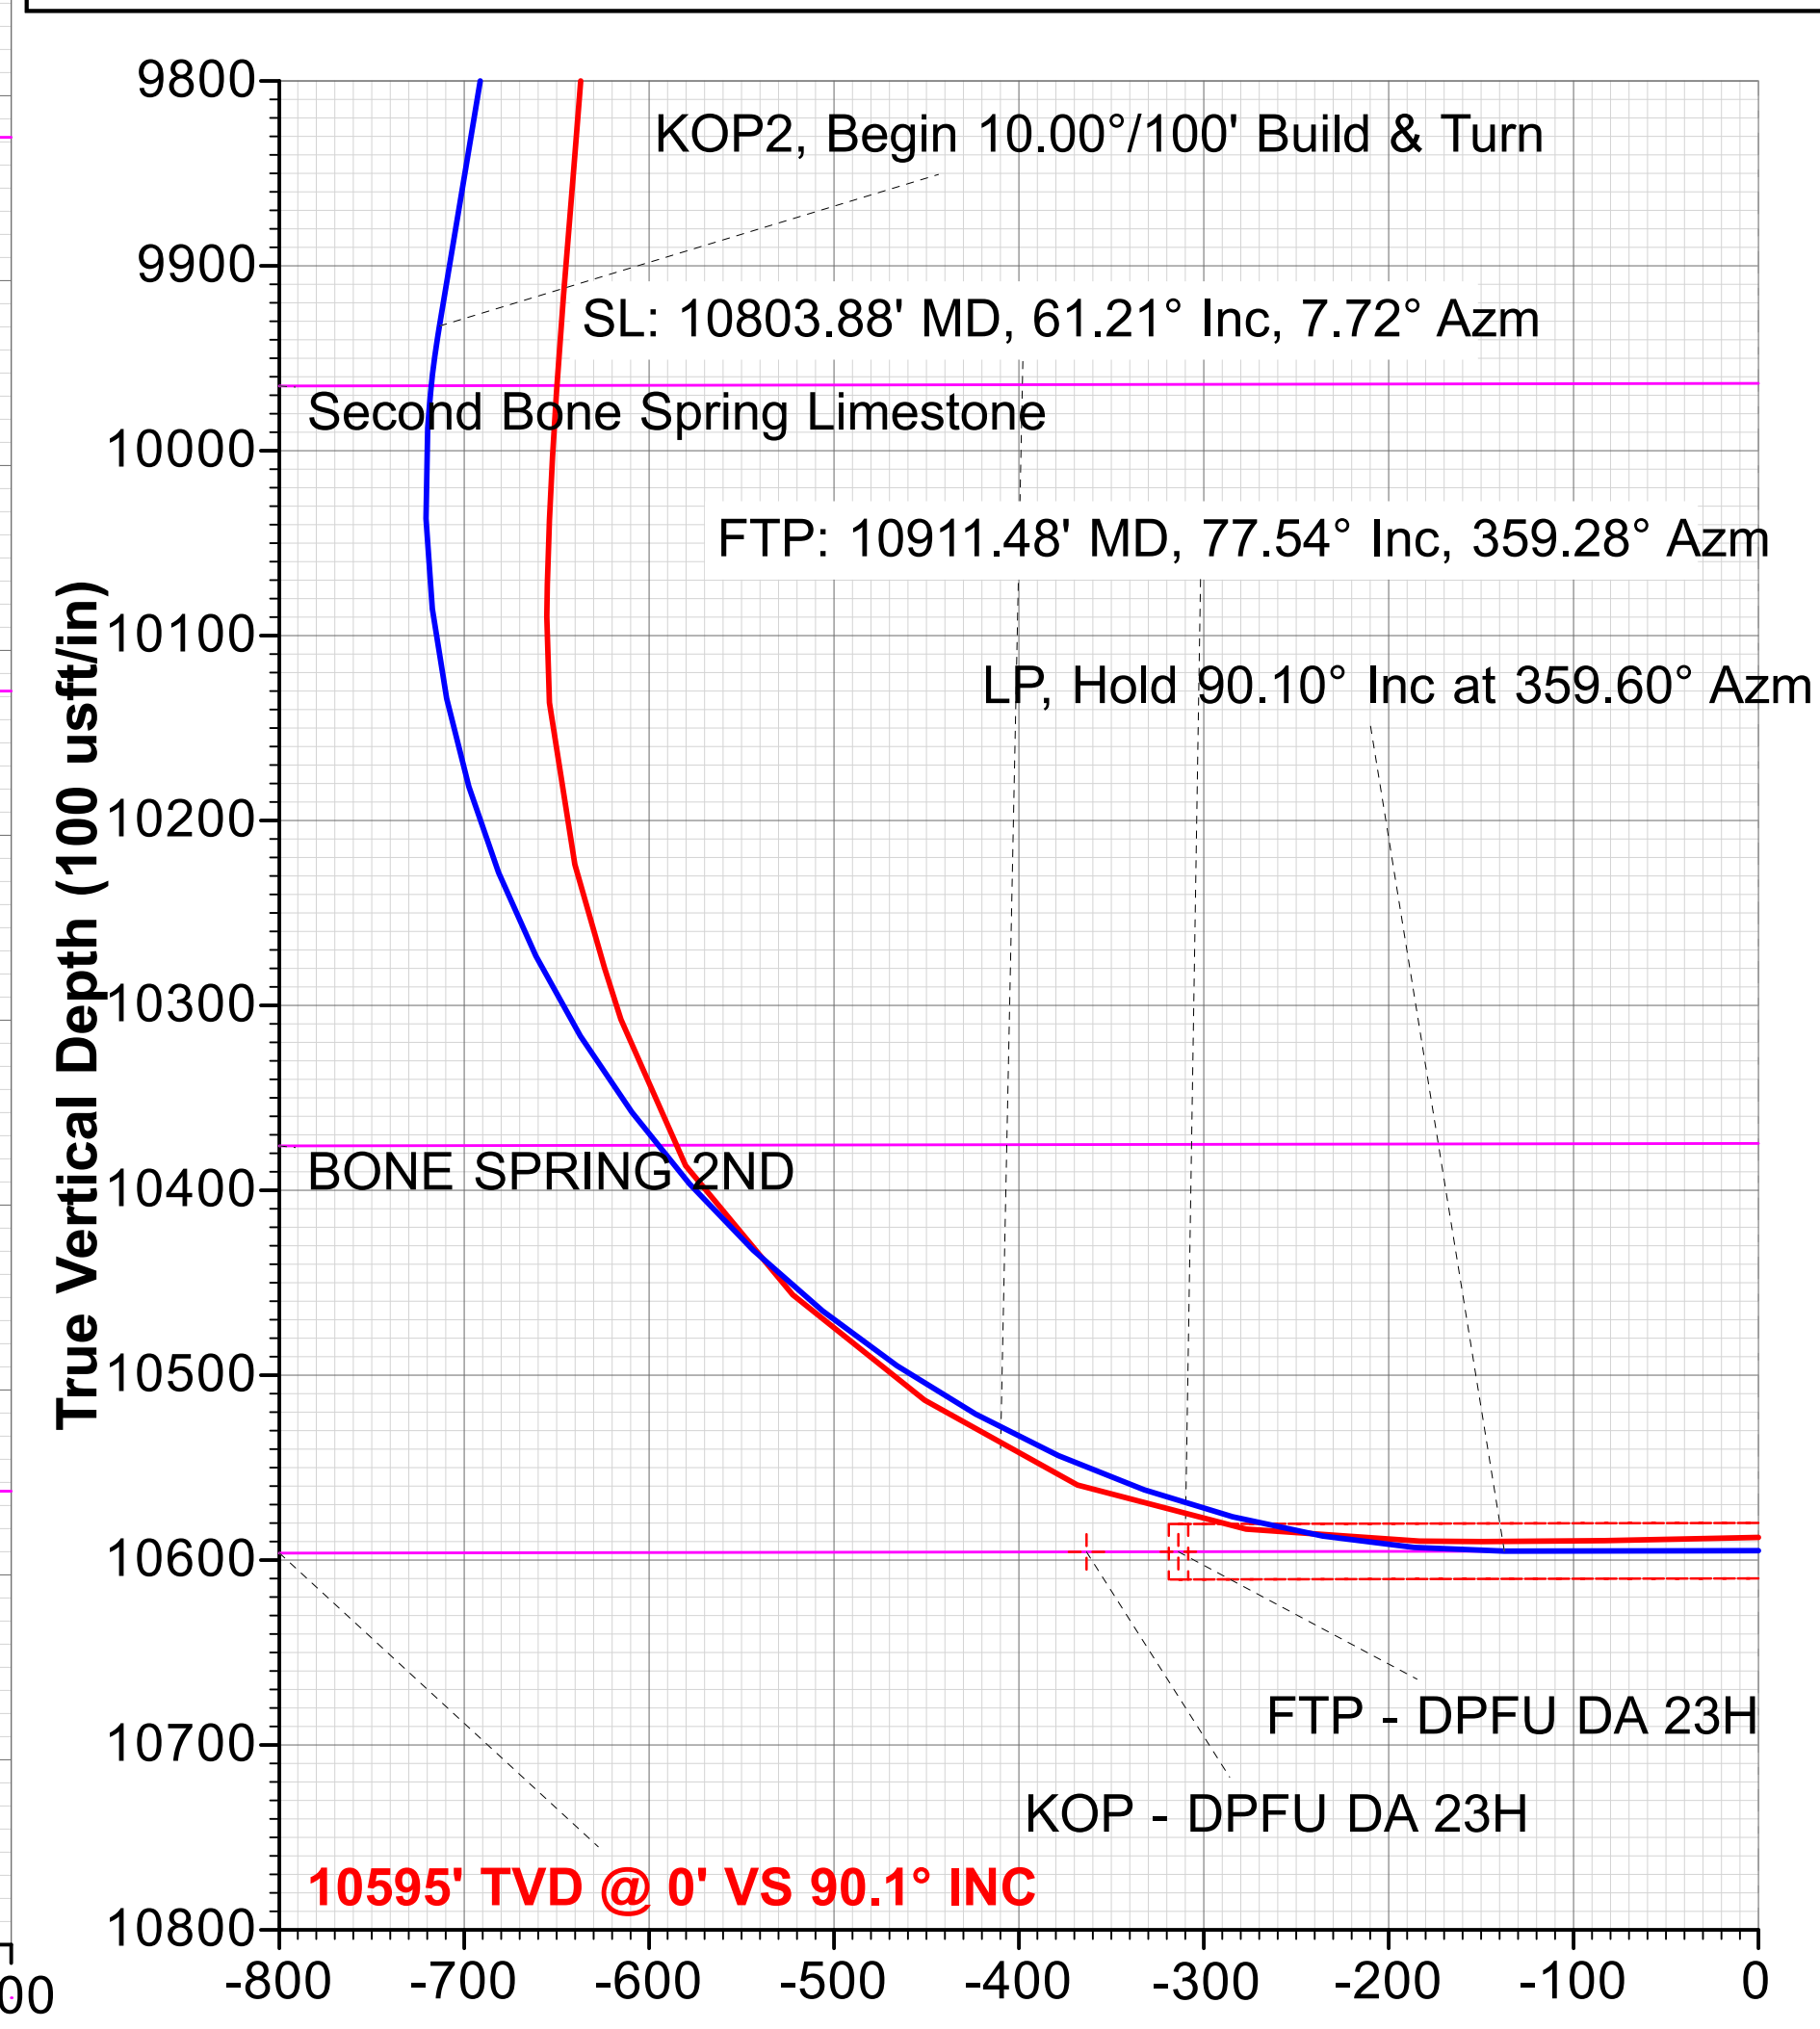

- LEGEND
- DR PI FEDERAL UNIT 17 8 DA 312H, OH, Surveys V0
 - DR PI FEDERAL UNIT 17 8 DA 034H, OH, Surveys V0
 - DR PI FEDERAL UNIT 17 8 DA 032H, OH, Surveys V0
 - MOZZARELLA FEDERAL COM 604H, OH / 67825, Surveys (H&P 313) V0
 - CLEARY AKC FEDERAL 001, OH, Surveys - INC ONLY V0
 - Dr Pi Fed Unit 17_8 DA 21H, OH / 70782, Plan 1 10-17-22 V0
 - Dr Pi Fed Unit 17_8 DA 21H, OH / 70782, Surveys (H&P 466) V0
 - CHEDDAR FEDERAL COM 651H, OH, Surveys (H&P 313) V0
 - CHEDDAR FEDERAL COM 501H, OH, Surveys (H&P 313) V0
 - CHEDDAR FEDERAL COM 502H, OH, Surveys (H&P 313) V0
 - Dr Pi Fed Unit 17_8 DA 25H, OH / 70666, Plan 2 10-05-22 V0
 - Dr Pi Fed Unit 17_8 DA 25H, OH / 70666, Surveys (H&P 605) V0
 - DR PI FEDERAL UNIT 17 8 DA 311H, OH, Surveys V0
 - Dr Pi Fed Unit 17_8 DA 23H, OH / 70783, Surveys (H&P 466) V0
 - DR PI FEDERAL UNIT 17 8 DA 031H, OH, Surveys V0
 - CHEDDAR FEDERAL COM 401H, OH, Surveys (H&P 313) V0
 - FEDERAL 8 COM 001, OH, Surveys - INC ONLY V0
 - MOZZARELLA FEDERAL COM 603H, OH, Surveys (H&P 313) V0
 - MOZZARELLA FEDERAL COM 602H, OH, Surveys (H&P 313) V0
 - CHEDDAR 3BS FEDERAL COM 001H, OH, Surveys V0
 - Plan 1 10-17-22

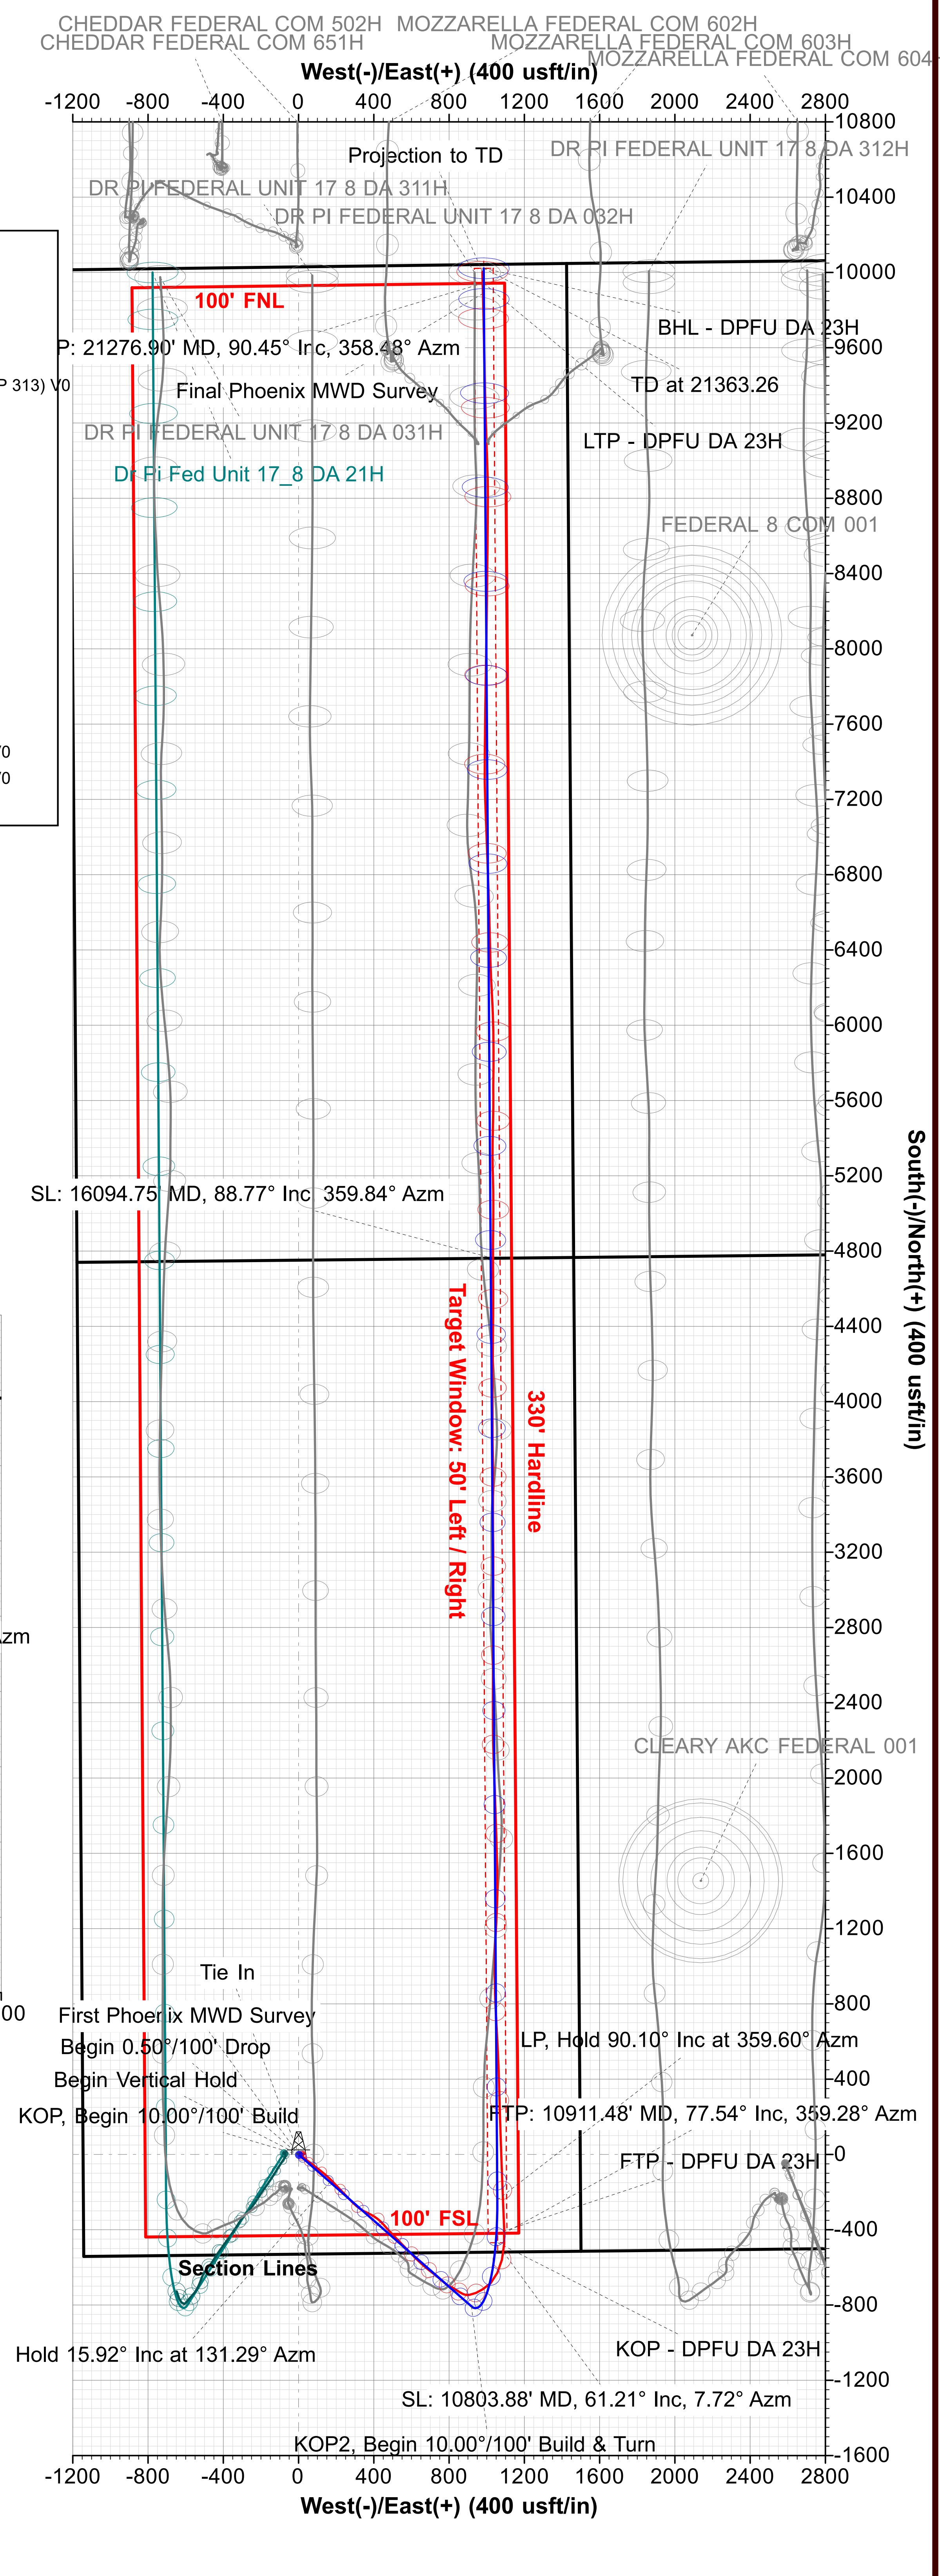

Intent ☐ As Drilled ☒

API # 30-025-48947		
Operator Name: OXY USA INC.	Property Name: Dr Pi Federal Unit 17 8 DA	Well Number 23H

Kick Off Point (KOP)

UL C	Section 20	Township T22S	Range R32E	Lot	Feet 223	From N/S North	Feet 2022	From E/W West	County Lea
Latitude 32.38373422N					Longitude 103.69879051W				NAD Nad 83

First Take Point (FTP)

UL N	Section 17	Township T22S	Range R32E	Lot	Feet 154	From N/S South	Feet 2234	From E/W West	County Lea
Latitude 32.38477304N					Longitude 103.69810310W				NAD Nad 83

Last Take Point (LTP)

UL C	Section 8	Township T22S	Range R32E	Lot	Feet 183	From N/S North	Feet 2195	From E/W West	County Lea
Latitude 32.41287146N					Longitude 103.69826508W				NAD Nad 83

Is this well the defining well for the Horizontal Spacing Unit? ☐ NoIs this well an infill well? ☐ Yes

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 178797

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 178797
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 178797

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 178797
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	RT EXPIRES 3/24/2023.	1/26/2023