

Well Name: SHOOT 12 FED	Well Location: T18S / R32E / SEC 12 / SWSE /	County or Parish/State: LEA / NM
Well Number: 03	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM94191	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002531101	Well Status: Abandoned	Operator: MATADOR PRODUCTION COMPANY

Subsequent Report

Sundry ID: 2721954

Type of Submission: Subsequent Report	Type of Action: Plug and Abandonment
Date Sundry Submitted: 03/21/2023	Time Sundry Submitted: 01:47
Date Operation Actually Began: 02/27/2023	

**Actual Procedure:** 2/27/23: MIRU WOR. 2/28/23: POOH w/ rods; Function test & NU BOPs. 3/1/23: POOH w/ tubing; RIH with WL & set CIBP @ 4,700' WLM. 3/2/23: Fill casing & pressure test to 500 psi for 30 minutes, good test. 3/3/23: TIH & Tag CIBP; Circulate casing full of MLF; Spot a 75 sk balanced plug of Class C cmt @ 4,700' TM. 3/6/23: TIH & Tag TOC @ 3,965' TM; OK'd by BLM Inspector; PU & Spot a 60 sk Class C cmt balanced plug @ 3,313' TM; PU & Spot a 35 sk Class C cmt balanced plug @ 1,532' TM. 3/7/23: RU WL; RIH & Tag TOC @ 1,150' WLM; Perf @ 501' WLM & Circulate Class C cmt to surface on all strings, 175 sks Class C cmt total. 3/14/23: Cut & remove wellhead; Top off and verify cement to surface on all strings; Weld on dryhole marker; fill cellar and back drag location. Spud Date: 12/19/1990  
Rig Release Date: RDMO; 3/7/2023 Inspector: Steven Baily

SR Attachments

- Actual Procedure
- Shoot\_12\_Federal\_\_003\_Dryhole\_Marker\_20230321134717.jpg
  - Shoot\_12\_Federal\_\_003\_As\_Plugged\_WBD\_20230321134710.pdf

Accepted for record – NMOCD

JRH      05/04/2023

Well Name: SHOOT 12 FED	Well Location: T18S / R32E / SEC 12 / SWSE /	County or Parish/State: LEA / NM
Well Number: 03	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM94191	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002531101	Well Status: Abandoned	Operator: MATADOR PRODUCTION COMPANY

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: BRETT JENNINGS  
Signed on: MAR 21, 2023 01:47 PM  
Name: MATADOR PRODUCTION COMPANY  
Title: Regulatory Analyst  
Street Address: 5400 LBJ FREEWAY, STE 1500  
City: DALLAS State: TX  
Phone: (972) 629-2160  
Email address: BRETT.JENNINGS@MATADORRESOURCES.COM

Field

Representative Name:  
Street Address:  
City: State: Zip:  
Phone:  
Email address:

BLM Point of Contact

BLM POC Name: JAMES A AMOS  
BLM POC Title: Acting Assistant Field Manager  
BLM POC Phone: 5752345927  
BLM POC Email Address: jamos@blm.gov  
Disposition: Accepted  
Disposition Date: 03/22/2023  
Signature: James A. Amos

2/27/23: MIRU WOR. 2/28/23: POOH w/ rods; Function test & NU BOPs. 3/1/23: POOH w/ tubing; RIH with WL & set CIBP @ 4,700' WLM. 3/2/23: Fill casing & pressure test to 500 psi for 30 minutes, good test. 3/3/23:

TIH & Tag CIBP; Circulate casing full of MLF; Spot a 75 sk balanced plug of Class C cmt @ 4,700' TM. 3/6/23: TIH &

Tag TOC @ 3,965' TM; OK'd by BLM Inspector; PU & Spot a 60 sk Class C cmt balanced plug @ 3,313' TM; PU & Spot

a 35 sk Class C cmt balanced plug @ 1,532' TM. 3/7/23: RU WL; RIH & Tag TOC @ 1,150' WLM; Perf @ 501' WLM &

Circulate Class C cmt to surface on all strings, 175 sks Class C cmt total. 3/14/23: Cut & remove wellhead; Top off and


verify cement to surface on all strings; Weld on dryhole marker; fill cellar and back drag location. Spud Date: 12/19/1990

Rig Release Date: RDMO; 3/7/2023 Inspector: Steven Bailly

Shoot 12 Fed #3  
495' FSL & 1980' FEL Sec. 12-T18S-R32E  
Lea County, NM  
API: 30-025-31101

CURRENT WELLBORE SCHEMATIC

Spudded: 12/19/1990

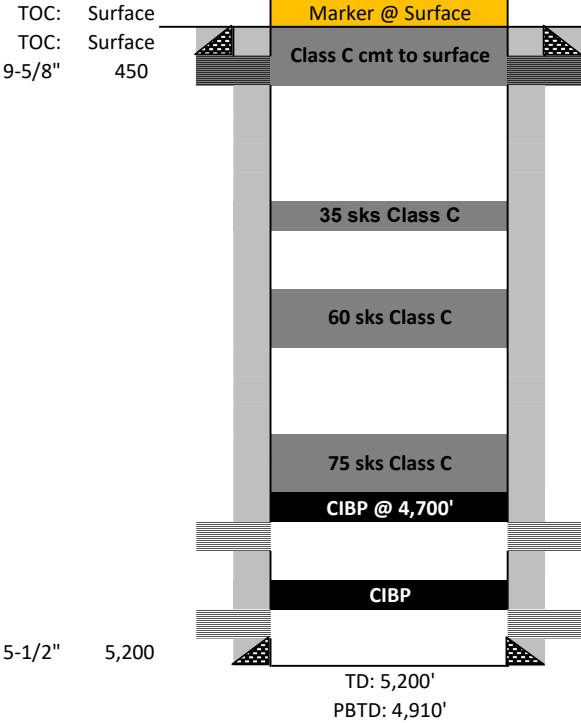

3/14/23: Cut & remove wellhead; Top off and verify cement to surface on all strings; Weld on dryhole marker; fill cellar and back drag location.  
3/7/23: Perf @ 501' & Sqz Class C cmt to surface on all strings (175 sxs total)

3/7/23: Tag TOC @ 1,150' WLM  
3/6/23: PU & Spot a 35 sk Class C cmt Balanced Plug @ 1,532' TM

3/6/23: PU & Spot a 60 sk Class C cmt Balanced Plug @ 3,313' TM

3/6/23: Tag TOC @ 3,965 TM (OK'd by BLM Inspector)  
3/3/23: TIH & circulate MLF; Spot a 75 sk balanced plug of Class C cmt @ 4,700' TM.  
3/2/23: Load & test casing to 500 psi for 30 minutes.  
3/1/23: RIH with WL & set CIBP @ 4,700' WLM.

7/12/2005 Delaware perfs (4,738-4,760')  
7/12/2005 CIBP (4,910')  
1/3/1991 Delaware perfs (4,939'-4,957')

	Casing Information		Type	Weight (lb/ft)	Joints	Depth Set
	Hole Size	Casing Size				
Intermediate	14-1/2"	9-5/8"	J-55	36#	12	450
Production	7-7/8"	5-1/2"	J-55	17#	119	5,200
Marker JT						3,855

	Cementing Record		TOC	Date Run	Geologic Markers	
	Type					
Surface	500 sks CI C		Surface	12/20/1990	Rustler	1,310
Production	1000 sks CI H		Surface	12/28/1990	Yates	2,770
					7 Rivers	3,247
					Queen	4,004
					Grayburg	4,612
					San Andres	5,148

Date	Perforation Information	
	Formation	Depth
7/12/2005	Delaware perfs	(4,738-4,760')
1/3/1991	Delaware perfs	(4,939'-4,957')

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS

Action 199989

CONDITIONS

Operator: MATADOR PRODUCTION COMPANY One Lincoln Centre Dallas, TX 75240	OGRID: 228937
	Action Number: 199989
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
john.harrison	None	5/4/2023