

District I
1625 N. French Dr., Hobbs, NM 88240

District II
811 S. First St., Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-104
Revised August 1, 2011

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date - NW- 03/19/2023
⁴ API Number 30-015-46350	⁵ Pool Name WC-015 G-08 S233135D; WOLFCAMP	⁶ Pool Code 98236
⁷ Property Code: 326187	⁸ Property Name: PRECIOUS 30-18 FEDERAL COM	⁹ Well Number: 3H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
C	31	23S	31E		570	NORTH	2148	WEST	EDDY

¹¹ Bottom Hole Location FTP: 119' FSL 2335' FWL LTP: 2404' FSL 2311' FWL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
K	18	23S	31E		2593	SOUTH	2334	WEST	EDDY
¹² Lse Code F	¹³ Producing Method Code : F		¹⁴ Gas Connection Date: 3/22/23		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
237722	CENTURION PIPELINE L.P.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 10/19/22	²² Ready Date 03/19/23	²³ TD 24610'M 11368'V	²⁴ PBSD 24568'M 11368'V	²⁵ Perforations 11547-24419'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	³⁰ Sacks Cement
17-1/2"		13-3/8"		424'	495
12-1/4"		9-5/8"		4203'	1054
8-3/4"		7-5/8"		10862'	366
6-3/4"		5-1/2"		24590'	1409

V. Well Test Data

³¹ Date New Oil 3/25/23	³² Gas Delivery Date 3/22/23	³³ Test Date 4/4/23	³⁴ Test Length 24 hrs	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 1757
³⁷ Choke Size 61/128	³⁸ Oil 3262	³⁹ Water 7813	⁴⁰ Gas 4707		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: 

Printed name:
JANA MENDIOLA

Title:
SR. REGULATORY ANALYST

E-mail Address:
Janalyn_mendiola@oxy.com

Date: 06/04/2023 Phone: 432-685-5936

OIL CONSERVATION DIVISION

Approved by:

PATRICIA MARTINEZ

Title: **PETROLEUM SPECIALIST**

Approval Date: **6/12/2023**

1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-015-46350	² Pool Code 98236	³ Pool Name WC-015 G-08 S233135D; WOLFCAMP
⁴ Property Code 326187	Property Name PRECIOUS 30_18 FED COM	
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁶ Well Number 3H
		⁹ Elevation 3349'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	31	23S	31E		570	NORTH	2148	WEST	EDDY
¹¹ Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
K	18	23S	31E		2593	SOUTH	2334	WEST	EDDY
¹² Dedicated Acres 816.41	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	CORNER COORDINATES NAD 83, SPCS NM EAST A - X: 700884.47' / Y: 474884.09' B - X: 700898.48' / Y: 472240.98' C - X: 700928.18' / Y: 466962.44' D - X: 700956.71' / Y: 461680.43' E - X: 698257.10' / Y: 461665.25' F - X: 698245.01' / Y: 464307.15' G - X: 698232.90' / Y: 466949.05' H - X: 698209.23' / Y: 472232.25' I - X: 698198.19' / Y: 474872.15'	CORNER COORDINATES NAD 27, SPCS NM EAST A - X: 659701.32' / Y: 474824.45' B - X: 659715.25' / Y: 472181.41' C - X: 659744.79' / Y: 466903.01' D - X: 659773.17' / Y: 461621.13' E - X: 657073.56' / Y: 461605.95' F - X: 657061.54' / Y: 464247.79' G - X: 657049.52' / Y: 466889.62' H - X: 657026.00' / Y: 472172.68' I - X: 657015.03' / Y: 474812.52' BOTTOM HOLE LOCATION 2593' FSL 2334' FWL, SECTION 18 24610' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 700532.28' / Y: 474833.96' LAT: 32.30434012N / LON: 103.81807578W NAD 27, SPCS NM EAST X: 659349.12' / Y: 474774.33' LAT: 32.30421743N / LON: 103.81758802W LAST TAKE POINT 2404' FSL 2311' FWL, SECTION 18 24419' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 700510.50' / Y: 474644.25' LAT: 32.30381892N / LON: 103.81814920W NAD 27, SPCS NM EAST X: 659327.34' / Y: 474584.62' LAT: 32.30369623N / LON: 103.81766147W FIRST TAKE POINT 119' FSL 2335' FWL, SECTION 30 11547' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 700591.85' / Y: 461797.81' LAT: 32.26850597N / LON: 103.81808564W NAD 27, SPCS NM EAST X: 659408.31' / Y: 461738.51' LAT: 32.26838306N / LON: 103.81759931W KICK OFF POINT 251' FNL 2328' FWL, SECTION 31 10887' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 700586.05' / Y: 461427.03' LAT: 32.26748686N / LON: 103.81811017W NAD 27, SPCS NM EAST X: 659402.50' / Y: 461367.74' LAT: 32.26736394N / LON: 103.81762389W SURFACE HOLE LOCATION 570' FNL 2148' FWL, SECTION 31 0' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 700407.80' / Y: 461107.50' LAT: 32.26661089N / LON: 103.81869181W NAD 27, SPCS NM EAST X: 659224.24' / Y: 461048.22' LAT: 32.26648797N / LON: 103.81820555W	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered with the division. Signature: Date: 3/17/23 Printed Name: JANA MENDIOLA E-mail Address: janalyn_mendiola@oxy.com ¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well surface location shown on this plat was plotted from field notes of the as-staked surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Data used for underground measurements were provided by others for reference only and does not constitute field measurements performed by R-Squared Global. Date of Survey: MARCH 15, 2023 Signature and Seal of Professional Surveyor: Certificate Number: 21653
--	---	---	--

Distances/areas relative to NAD 83 Combined Scale Factor: 0.99977803 Convergence Angle: 00°16'32.4192950"

Horizontal Spacing Unit




OXY



Borehole:				Well:				Field:				Structure:							
Precious 30-18 Federal Com 3H				Precious 30-18 Federal Com 3H				NM Eddy County (NAD 83)				Oxy Precious 30-18 Federal Com Pad (H&P 419)							
Gravity & Magnetic Parameters								Surface Location				NAD83 New Mexico State Plane, Eastern Zone, US Feet				Miscellaneous			
Model: IFR1		Dip: 59.926°		Date: 31-Dec-2022		Gravity FS: 986.451mgN (9.80665 Based)		Lat: N 32 15 59.80		Northing: 461107.5HUS		Grid Conv: 0.2748°		Slat: Precious 30-18 Federal Com 3H		TVD Ref: RKB(3375.1ft above MSL)			
MagDec: 6.77°		FS: 47610.4nT						Lon: W 103 49 7.29		Easting: 700407.8HUS		Scale Fact: 0.99993807		Plan: Oxy Precious 30-18 Federal Com 3H Gyro+MWD to 24610'MD					

Critical Points								
Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
SHL	26.00	0.00	0.00	26.00	0.00	0.00	0.00	0.00
First Gyro Survey	89.94	0.19	183.83	89.94	-0.11	-0.11	-0.01	0.30
Last Gyro Survey	415.22	0.23	258.90	415.22	-0.92	-0.92	-0.11	0.30
First SLB Survey	513.00	0.41	181.75	513.00	-1.31	-1.30	-0.31	0.43
Actual KOP	10887.00	2.55	359.97	10861.34	321.09	319.53	178.25	12.54
FTP / 100ft FSL Crossing	11526.00	64.62	2.11	11358.42	672.84	671.25	183.41	5.89
Wolfcamp A Intersection	11792.63	78.69	354.36	11449.10	922.33	920.86	171.13	11.27
Exit Lateral Window	12815.31	91.55	353.05	11441.77	1941.06	1940.05	122.79	2.28
Enter Lateral Window	13344.09	92.22	2.14	11453.38	2468.41	2467.45	120.52	2.04
LTP / 2540ft FSL Crossing	24559.00	90.56	7.49	11368.20	13676.44	13675.94	117.54	2.12
Final MWD Survey	24579.00	90.54	7.91	11368.01	13696.28	13695.76	120.22	2.12
Proj to TD	24610.00	90.54	7.91	11367.72	13727.02	13726.46	124.48	0.00

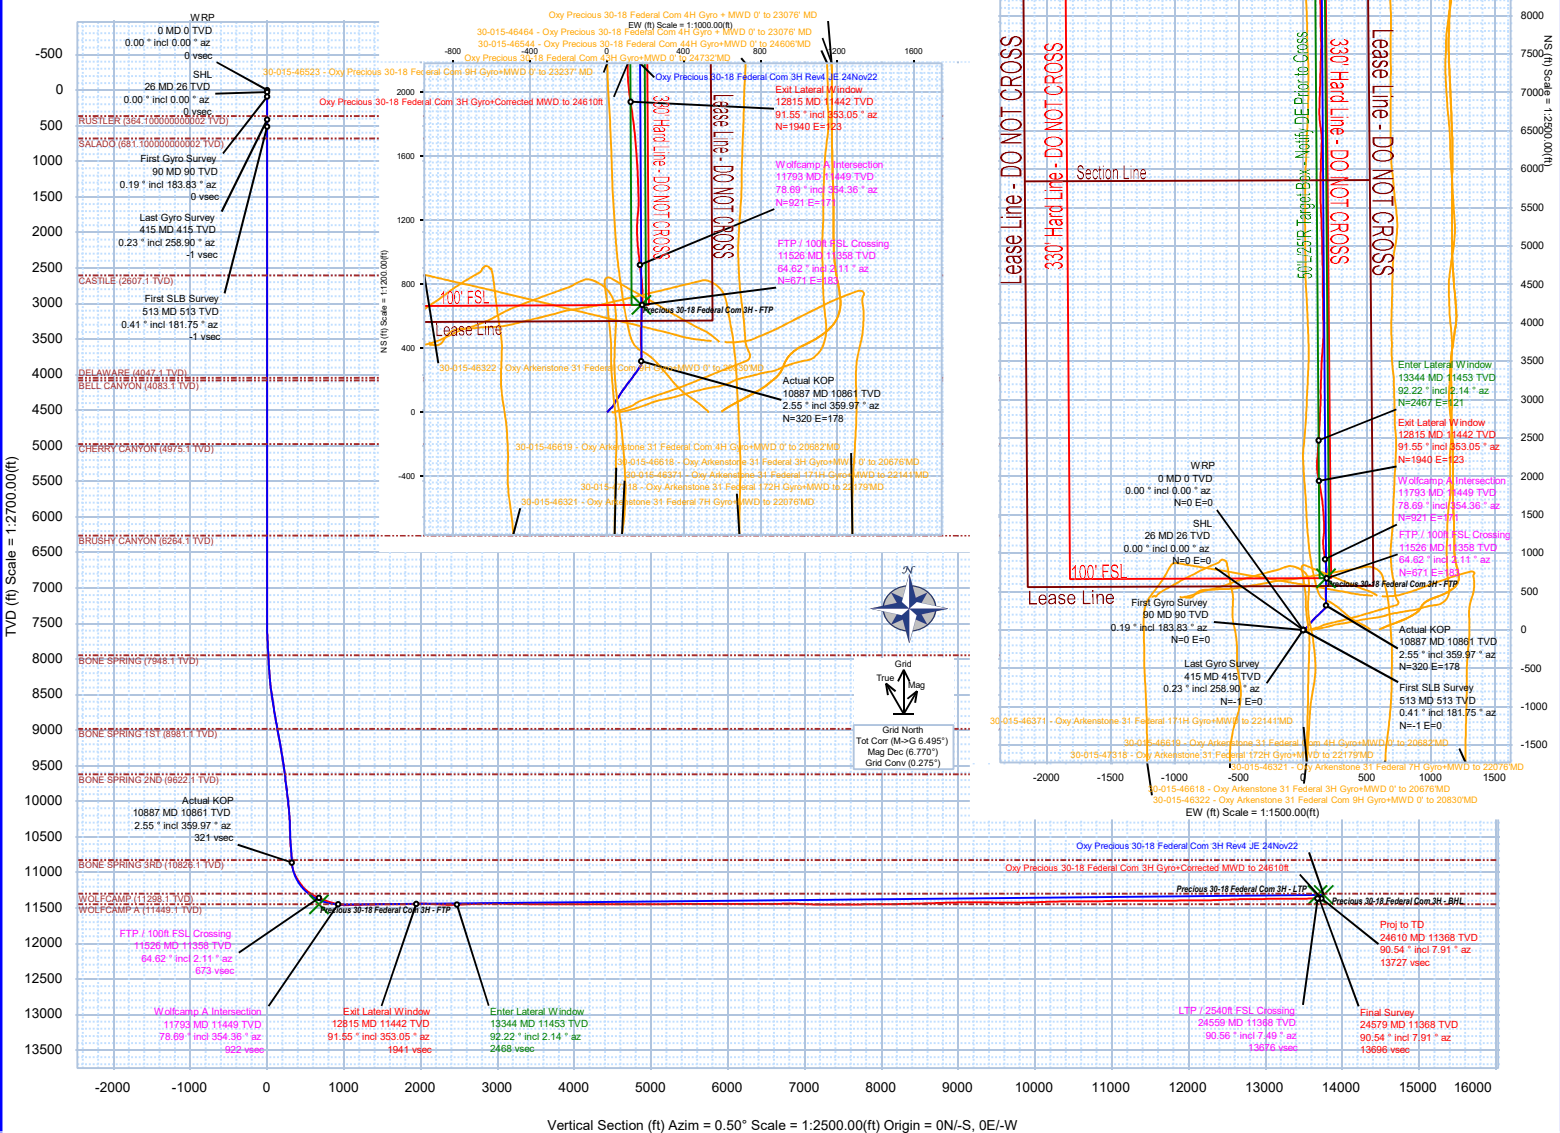



Oxy Precious 30-18 Federal Com 3H Gyro+MWD to 24610'MD Survey Geodetic Report (Def Survey)



Report Date: January 26, 2023 - 03:56 PM Client: OXY Field: NM Eddy County (NAD 83) Structure / Slot: Oxy Precious 30-18 Federal Com Pad (H&P 419) / Precious 30-18 Federal Com 3H Well: Precious 30-18 Federal Com 3H Borehole: Precious 30-18 Federal Com 3H UWI / API#: Unknown / Unknown Survey Name: Oxy Precious 30-18 Federal Com 3H Gyro+MWD to 24610'MD Survey Date: October 26, 2022 Tort / AHD / DDI / ERD Ratio: 327.673 " / 13809.858 ft / 6.988 / 1.205 Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet Location Lat / Long: N 32° 15' 59.79921", W 103° 49' 7.29052" Location Grid N/E Y/X: N 461107.500 ftUS, E 700407.800 ftUS CRS Grid Convergence Angle: 0.2748 ° Grid Scale Factor: 0.99993807 Version / Patch: 2.10.829.1	Survey / DLS Computation: Minimum Curvature / Lubinski Vertical Section Azimuth: 0.504 ° (Grid North) Vertical Section Origin: 0.000 ft, 0.000 ft TVD Reference Datum: RKB = 26" TVD Reference Elevation: 3375.100 ft above MSL Seabed / Ground Elevation: 3349.100 ft above MSL Magnetic Declination: 6.770 ° Total Gravity Field Strength: 998.4514mgm (9.80665 Based) Gravity Model: GARM Total Magnetic Field Strength: 47610.400 nT Magnetic Dip Angle: 59.926 ° Declination Date: December 31, 2022 Magnetic Declination Model: IFR1 North Reference: Grid North Grid Convergence Used: 0.2800 ° Total Corr Mag North->Grid North: 6.4900 ° Local Coord Referenced To: Well Head	
--	--	--

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (NUS)	Easting (NUS)	Latitude (N/S °)	Longitude (E/W °)
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	0.00	0.00	461107.50	700407.80	N 32.266611	W 103.818692
SHL	26.00	0.00	0.00	26.00	0.00	0.00	0.00	0.00	0.00	0.00	461107.50	700407.80	N 32.266611	W 103.818692
First Gyro Survey	89.94	0.19	183.83	89.94	-0.11	-0.11	-0.01	0.30	0.11	183.83	461107.39	700407.79	N 32.266611	W 103.818692
	174.53	0.12	193.43	174.53	-0.33	-0.33	-0.04	0.09	0.33	186.37	461107.17	700407.76	N 32.266610	W 103.818692
	262.97	0.29	162.64	262.97	-0.64	-0.64	0.01	0.22	0.64	179.26	461106.86	700407.81	N 32.266609	W 103.818692
	357.29	0.06	247.12	357.29	-0.88	-0.88	0.03	0.31	0.88	177.80	461106.62	700407.83	N 32.266608	W 103.818692
Last Gyro Survey	415.22	0.23	258.90	415.22	-0.92	-0.92	-0.11	0.30	0.92	186.72	461106.58	700407.69	N 32.266608	W 103.818692
First SLB Survey	513.00	0.41	181.75	513.00	-1.30	-1.30	-0.31	0.43	1.34	193.43	461106.20	700407.49	N 32.266607	W 103.818693
	607.00	0.11	192.17	607.00	-1.73	-1.73	-0.34	0.32	1.76	191.15	461105.77	700407.46	N 32.266606	W 103.818693
	680.00	0.08	350.75	680.00	-1.75	-1.75	-0.36	0.26	1.78	191.76	461105.75	700407.44	N 32.266606	W 103.818693
	775.00	0.11	93.62	775.00	-1.69	-1.69	-0.28	0.16	1.71	189.53	461105.81	700407.52	N 32.266606	W 103.818693
	869.00	0.14	152.66	869.00	-1.80	-1.79	-0.14	0.13	1.80	184.47	461105.70	700407.66	N 32.266606	W 103.818692
	962.00	0.16	277.60	962.00	-1.88	-1.88	-0.22	0.29	1.89	186.59	461105.62	700407.58	N 32.266606	W 103.818693
	1058.00	0.14	170.65	1058.00	-1.98	-1.98	-0.33	0.25	2.00	189.50	461105.52	700407.47	N 32.266605	W 103.818693
	1152.00	0.17	200.77	1152.00	-2.22	-2.22	-0.36	0.09	2.25	189.25	461105.28	700407.44	N 32.266605	W 103.818693
	1248.00	0.17	82.55	1247.99	-2.34	-2.33	-0.27	0.30	2.35	186.62	461105.16	700407.53	N 32.266604	W 103.818693
	1343.00	0.13	7.64	1342.99	-2.21	-2.21	-0.12	0.19	2.21	183.03	461105.29	700407.68	N 32.266605	W 103.818692
	1437.00	0.15	24.53	1436.99	-1.99	-1.99	-0.05	0.05	1.99	181.48	461105.51	700407.75	N 32.266605	W 103.818692
	1532.00	0.14	279.13	1531.99	-1.86	-1.86	-0.11	0.24	1.86	183.52	461105.64	700407.69	N 32.266606	W 103.818692
	1627.00	0.12	67.01	1626.99	-1.80	-1.80	-0.14	0.26	1.81	184.36	461105.70	700407.66	N 32.266606	W 103.818692
	1722.00	0.10	269.06	1721.99	-1.74	-1.74	-0.12	0.22	1.74	184.09	461105.76	700407.68	N 32.266606	W 103.818692
	1816.00	0.13	244.03	1815.99	-1.76	-1.76	-0.30	0.10	1.78	189.61	461105.74	700407.50	N 32.266606	W 103.818693
	2006.00	0.13	257.90	2005.99	-1.90	-1.90	-0.70	0.02	2.02	200.31	461105.60	700407.10	N 32.266606	W 103.818694
	2101.00	0.09	353.94	2100.99	-1.85	-1.85	-0.82	0.17	2.02	203.84	461105.65	700406.98	N 32.266606	W 103.818694
	2195.00	0.10	79.78	2194.99	-1.76	-1.76	-0.74	0.14	1.91	202.91	461105.74	700407.06	N 32.266606	W 103.818694
	2290.00	0.09	14.63	2289.99	-1.68	-1.67	-0.64	0.11	1.79	201.03	461105.83	700407.16	N 32.266606	W 103.818694
	2385.00	0.12	18.83	2384.99	-1.51	-1.50	-0.59	0.03	1.62	201.46	461106.00	700407.21	N 32.266607	W 103.818694
	2479.00	0.17	177.71	2478.99	-1.56	-1.55	-0.55	0.30	1.65	199.66	461105.95	700407.25	N 32.266607	W 103.818694
	2574.00	0.18	261.78	2573.99	-1.72	-1.71	-0.70	0.25	1.85	202.11	461105.79	700407.10	N 32.266606	W 103.818694
	2669.00	0.21	14.54	2668.99	-1.57	-1.57	-0.80	0.34	1.76	207.07	461105.93	700407.00	N 32.266607	W 103.818694
	2764.00	0.27	310.79	2763.99	-1.26	-1.25	-0.93	0.27	1.56	216.51	461106.25	700406.87	N 32.266607	W 103.818695
	2858.00	0.08	34.71	2857.99	-1.06	-1.05	-1.06	0.29	1.49	225.11	461106.45	700406.74	N 32.266608	W 103.818695
	2953.00	0.24	304.65	2952.99	-0.89	-0.88	-1.18	0.27	1.48	233.20	461106.62	700406.62	N 32.266608	W 103.818696
	3048.00	0.17	333.26	3047.99	-0.66	-0.65	-1.43	0.13	1.55	245.39	461106.85	700406.39	N 32.266609	W 103.818696
	3143.00	0.21	162.30	3142.99	-0.70	-0.69	-1.42	0.40	1.58	244.23	461106.81	700406.38	N 32.266609	W 103.818696
	3237.00	0.20	228.96	3236.99	-0.97	-0.96	-1.49	0.24	1.77	237.30	461106.54	700406.31	N 32.266608	W 103.818697
	3332.00	0.01	333.37	3331.99	-1.07	-1.06	-1.62	0.21	1.93	236.83	461106.44	700406.18	N 32.266608	W 103.818697
	3427.00	0.06	29.40	3426.99	-1.02	-1.01	-1.60	0.06	1.89	237.78	461106.49	700406.20	N 32.266608	W 103.818697
	3522.00	0.16	210.88	3521.99	-1.09	-1.08	-1.64	0.23	1.96	238.71	461106.42	700406.16	N 32.266608	W 103.818697
	3616.00	0.25	252.84	3615.99	-1.27	-1.25	-1.91	0.18	2.28	236.71	461106.25	700405.89	N 32.266607	W 103.818698
	3711.00	0.05	41.91	3710.99	-1.30	-1.28	-2.08	0.31	2.44	238.31	461106.22	700405.72	N 32.266607	W 103.818698
	3805.00	0.19	126.67	3804.99	-1.36	-1.34	-1.92	0.20	2.35	235.05	461106.16	700405.88	N 32.266607	W 103.818698
	3900.00	0.17	50.65	3899.99	-1.36	-1.35	-1.69	0.23	2.16	231.38	461106.15	700406.11	N 32.266607	W 103.818697
	3995.00	0.18	124.70	3994.99	-1.36	-1.34	-1.46	0.22	1.98	227.29	461106.15	700406.34	N 32.266607	W 103.818697
	4082.00	0.22	50.49	4081.99	-1.33	-1.32	-1.22	0.28	1.79	222.72	461106.18	700406.58	N 32.266607	W 103.818696
	4280.00	0.26	220.36	4279.99	-1.43	-1.42	-1.21	0.24	1.87	220.58	461106.08	700406.59	N 32.266607	W 103.818696
	4381.00	0.31	246.31	4380.99	-1.67	-1.65	-1.46	0.12	2.24	222.32	461105.84	700406.29	N 32.266606	W 103.818697
	4476.00	0.20	17.55	4475.99	-1.57	-1.56	-1.59	0.36	2.23	225.67	461105.94	700406.21	N 32.266607	W 103.818697
	4570.00	0.20	92.37	4569.99	-1.42	-1.41	-1.38	0.26	1.97	224.44	461106.09	700406.42	N 32.266607	W 103.818696
	4665.00	0.19	158.87	4664.98	-1.57	-1.56	-1.16	0.23	1.94	216.56	461105.94	700406.64	N 32.266607	W 103.818696
	4760.00	0.18	331.39	4759.98	-1.59	-1.58	-1.17	0.39	1.97	216.63	461105.92	700406.63	N 32.266607	W 103.818696
	4855.00	0.20	332.33	4854.98	-1.22	-1.21	-1.37	0.02	1.83	228.47	461106.29	700406.43	N 32.266608	W 103.818696
	4949.00	0.18	301.35	4948.98	-1.07	-1.05	-1.05	0.17	1.85	235.17	461106.45	700406.29	N 32.266607	W 103.818696
	5044.00	0.18	204.35	5043.98	-1.12	-1.10	-1.72	0.30	2.04	237.28	461106.40	700406.08	N 32.266608	W 103.818697
	5139.00	0.17	221.30	5138.98	-1.36	-1.35	-1.87	0.06	2.31	234.30	461106.15	700405.93	N 32.266607	W 103.818698
	5233.00	0.22	342.05	5232.98	-1.30	-1.28	-2.02	0.36	2.39	237.67	461106.22	700405.78	N 32.266607	W 103.818698
	5328.00	0.18	335.47	5327.98	-0.99	-0.97	-2.14	0.05	2.35	245.61	461106.53	700405.66	N 32.266608	W 103.818699
	5423.00	0.18	110.22	5422.98	-0.90	-0.89	-2.06	0.35	2.24	246.74	461106.61	700405.74	N 32.266608	W 103.818698
	5518.00	0.18	149.05	5517.98	-1.04	-1.07	-1.84	0.13	2.13	239.99	461106.43	700405.06	N 32.266608	W 103.818698
	5613.00	0.19	144.44	5612.98	-1.34	-1.32	-1.88	0.02	2.13	232.74	461106.18	700406.13	N 32.266607	W 103.818697
	5707.00	0.19	46.02	5706.98	-1.35	-1.34	-1.47	0.31	1.99	227.70	461106.16	700406.33	N 32.266607	W 103.818697
	5802.00	0.18	65.59	5801.98	-1.18	-1.17	-1.22	0.07	1.69	226.31	461106.33	700406.58	N 32.266608	W 103.818698
	5897.00	0.21	354.11	5896.98	-0.94	-0.93	-1.11	0.24	1.45	229.81	461106.57	700406.70	N 32.266608	W 103.818695
	5992.00	0.21	43.29	5991.98	-0.64	-0.63	-1.00	0.18	1.19	237.73	461106.87	700406.80	N 32.266609	W 103.818695
	6086.00	0.19	30.36	6085.98	-0.38	-0.37	-0.81	0.05	0.89	245.13	461107.13	700406.99	N 32.266610	W 103.818694
	6181.00	0.19	205.98	6180.98	-0.39	-0.38	-0.80	0.00	0.89	244.50	461107.12	700407.00	N 32.266610	W 103.818694
	6276.00	0.22	176.86	6275.98	-0.71	-0.70	-0.86	0.11	1.11	230.56	46			

Comments	MD (R)	Incl (°)	Azin Grid (°)	TVD (R)	VSEC (R)	NS (R)	EW (R)	DLS (°100R)	Closure (R)	Closure Azimuth (°)	Northing (RUS)	Easting (RUS)	Latitude (N/S)	Longitude (E/W)
Actual KOP	9782.00	7.76	34.84	9780.17	245.61	244.32	148.47	0.75	285.89	31.28	461351.80	700556.26	N 32.267280	W 103.818208
	9876.00	7.22	30.79	9853.37	255.96	254.60	155.12	0.80	298.13	31.35	461362.08	700562.91	N 32.267309	W 103.818186
	9971.00	6.64	31.03	9947.68	265.84	264.44	161.01	0.61	309.60	31.34	461371.92	700568.80	N 32.267336	W 103.818167
	10066.00	6.57	27.81	10042.05	275.40	273.95	166.37	0.40	320.51	31.27	461381.43	700574.16	N 32.267362	W 103.818149
	10161.00	5.65	27.78	10136.51	284.39	282.89	171.09	0.97	330.61	31.16	461390.38	700578.88	N 32.267386	W 103.818134
	10350.00	1.32	30.15	10325.11	294.55	293.01	176.52	2.29	342.08	31.07	461400.49	700584.31	N 32.267414	W 103.818116
	10445.00	2.22	27.76	10420.09	294.40	294.85	177.34	0.12	344.18	31.05	461402.34	700585.33	N 32.267419	W 103.818113
	10540.00	2.57	1.63	10515.04	299.43	297.98	178.07	1.65	347.05	30.87	461405.36	700585.86	N 32.267427	W 103.818111
	10634.00	4.42	356.21	10608.86	305.15	303.60	177.89	2.00	351.88	30.37	461411.08	700585.68	N 32.267443	W 103.818112
	10729.00	3.96	1.91	10703.60	312.08	310.53	177.76	0.65	357.81	29.79	461418.01	700585.55	N 32.267462	W 103.818112
FTP / 100ft FSL Crossing	10824.00	3.29	5.43	10798.41	318.08	316.52	178.13	0.74	363.20	29.37	461424.00	700585.92	N 32.267479	W 103.818111
	10837.00	2.89	3.14	10811.40	318.78	317.22	178.18	3.22	363.84	29.32	461424.70	700585.97	N 32.267480	W 103.818110
	10886.00	2.42	359.83	10860.34	321.05	319.49	178.25	1.01	365.85	29.16	461426.97	700586.04	N 32.267487	W 103.818110
	10887.00	2.55	359.97	10861.34	321.09	319.53	178.25	12.54	365.89	29.15	461427.01	700586.04	N 32.267487	W 103.818110
	10981.00	14.33	2.18	10954.16	334.85	333.29	178.69	12.54	378.17	28.20	461440.77	700586.48	N 32.267525	W 103.818109
	11076.00	24.47	359.05	11043.65	366.36	364.80	178.81	10.73	406.26	26.11	461472.27	700586.60	N 32.267611	W 103.818108
	11171.00	32.45	357.76	11127.10	411.56	410.01	177.49	8.42	446.78	23.41	461517.48	700585.28	N 32.267736	W 103.818111
	11266.00	38.23	359.30	11204.57	466.45	464.92	176.13	6.16	497.16	20.75	461572.39	700583.92	N 32.267886	W 103.818115
	11360.00	50.18	1.83	11271.84	531.86	530.32	176.93	12.85	559.06	18.45	461637.79	700584.72	N 32.268066	W 103.818111
	11455.00	60.57	3.27	11325.74	609.87	608.31	180.41	11.01	634.51	16.52	461715.77	700588.25	N 32.268252	W 103.818099
Wolfcamp A Intersection	11526.00	64.62	2.11	11358.42	672.84	671.25	183.41	5.89	695.86	15.28	461778.71	700591.20	N 32.268453	W 103.818088
	11550.00	65.99	1.73	11368.44	694.64	693.04	184.14	5.89	717.09	14.88	461800.50	700591.93	N 32.268513	W 103.818085
	11644.00	68.86	357.38	11404.54	781.39	779.81	183.43	5.25	801.09	13.24	461887.26	700591.22	N 32.268752	W 103.818086
	11739.00	72.67	353.78	11435.84	870.72	869.20	176.49	5.37	886.94	11.48	461976.64	700594.28	N 32.268998	W 103.818107
	11792.63	78.69	354.36	11449.10	922.33	920.86	177.13	11.27	936.63	9.87	462028.30	700578.91	N 32.269140	W 103.818124
	11834.00	83.33	354.79	11455.56	961.53	961.53	167.26	9.87	967.26	9.87	462068.97	700575.75	N 32.269252	W 103.818136
	11928.00	91.59	355.72	11458.39	1056.39	1056.39	166.92	8.60	1067.02	8.60	462102.46	700567.30	N 32.269505	W 103.818155
	12023.00	91.28	0.76	11457.35	1151.26	1149.93	156.59	5.31	1160.54	7.75	462257.35	700564.38	N 32.269770	W 103.818167
	12118.00	91.98	5.08	11454.64	1246.11	1244.74	161.43	4.60	1255.17	7.39	462352.16	700569.22	N 32.270030	W 103.818150
	12212.00	91.35	358.53	11451.91	1340.00	1338.60	164.38	7.00	1348.66	7.00	462446.02	700572.17	N 32.270288	W 103.818139
Enter Lateral Window	12307.00	90.98	358.57	11449.98	1434.92	1433.55	161.98	0.39	1442.68	6.34	462540.96	700569.77	N 32.270549	W 103.818146
	12401.00	91.23	356.69	11446.37	1528.79	1527.45	158.09	2.00	1535.61	5.91	462645.86	700565.88	N 32.270807	W 103.818157
	12495.00	89.80	357.14	11447.73	1622.60	1621.31	153.03	1.34	1628.52	5.39	462728.71	700560.82	N 32.271065	W 103.818172
	12590.00	90.59	352.60	11447.41	1717.31	1716.09	146.54	2.38	1722.33	4.88	462823.48	700554.33	N 32.271326	W 103.818191
	12699.00	91.58	354.16	11445.34	1825.71	1824.58	136.27	1.20	1829.66	4.27	462931.96	700544.06	N 32.271624	W 103.818223
	12793.00	91.95	352.74	11442.45	1918.95	1917.92	125.55	1.56	1922.02	3.75	463025.29	700533.34	N 32.271881	W 103.818256
	12815.31	91.55	353.05	11441.77	1941.06	1940.05	122.79	2.28	1943.93	3.62	463047.43	700530.58	N 32.271942	W 103.818264
	12888.00	90.23	354.05	11440.64	2013.20	2012.26	114.62	2.28	2015.53	3.26	463119.64	700522.42	N 32.272140	W 103.818290
	12983.00	87.59	358.33	11442.45	2107.88	2107.01	108.31	5.29	2109.79	2.94	463214.37	700516.11	N 32.272401	W 103.818309
	13077.00	86.20	3.10	11447.54	2201.71	2200.83	109.48	5.28	2203.55	2.85	463308.19	700517.27	N 32.272659	W 103.818303
Exit Lateral Window	13172.00	86.88	2.40	11453.28	2296.46	2295.55	114.03	1.03	2298.38	2.84	463402.90	700521.82	N 32.272919	W 103.818287
	13266.00	90.63	2.04	11455.32	2390.38	2389.44	117.67	4.01	2392.33	2.82	463496.79	700525.46	N 32.273177	W 103.818274
	13344.09	92.22	2.14	11453.38	2468.41	2467.45	120.52	2.04	2470.39	2.80	463574.79	700528.31	N 32.273391	W 103.818264
	13361.00	92.56	2.16	11452.67	2485.30	2484.33	121.15	2.04	2487.29	2.77	463591.67	700528.94	N 32.273438	W 103.818261
	13455.00	92.45	2.12	11448.52	2580.17	2579.19	120.52	2.72	2582.19	2.72	463686.51	700532.19	N 32.273699	W 103.818248
	13551.00	92.40	2.05	11444.50	2675.05	2674.03	128.15	0.09	2677.10	2.94	463781.36	700535.94	N 32.273959	W 103.818236
	13645.00	92.45	1.24	11440.52	2768.95	2767.91	130.84	0.86	2771.00	2.71	463875.23	700538.63	N 32.274217	W 103.818226
	13740.00	90.09	1.59	11438.42	2863.91	2862.85	133.19	2.51	2865.94	2.66	463970.16	700540.98	N 32.274478	W 103.818216
	13834.00	90.76	1.83	11437.72	2957.88	2956.80	135.99	0.76	2959.93	2.63	464064.11	700543.78	N 32.274736	W 103.818206
	13929.00	87.48	359.65	11439.18	3052.85	3051.76	137.22	4.15	3054.85	2.53	464159.07	700545.01	N 32.274987	W 103.818201
Wolfcamp A Intersection	14024.00	87.48	0.34	11442.83	3147.78	3146.68	137.22	0.99	3149.68	2.60	464253.99	700545.01	N 32.275249	W 103.818192
	14118.00	89.63	1.78	11444.67	3241.65	3240.65	138.95	2.22	3243.63	2.46	464347.95	700546.74	N 32.275516	W 103.818192
	14213.00	89.49	0.94	11445.40	3336.74	3335.62	141.21	0.90	3338.61	2.42	464442.91	700549.00	N 32.275777	W 103.818183
	14307.00	89.63	1.49	11446.12	3430.73	3429.60	143.20	0.60	3432.59	2.39	464536.88	700550.99	N 32.276036	W 103.818175
	14496.00	88.82	2.73	11448.68	3619.63	3618.45	150.16	0.78	3621.56	2.38	464725.72	700557.95	N 32.276557	W 103.818150
	14591.00	89.92	2.54	11449.73	3714.56	3713.24	154.52	1.18	3716.55	2.38	464820.60	700562.31	N 32.276815	W 103.818134
	14685.00	89.75	359.50	11449.82	3807.28	3806.28	157.71	1.12	3810.55	2.37	464914.54	700565.58	N 32.277054	W 103.818122
	14780.00	89.85	359.50	11448.86	3903.52	3902.27	160.42	2.17	3905.49	2.32	465009.52	700566.19	N 32.277335	W 103.818119
	14874.00	89.80	359.42	11449.23	3997.50	3996.27	157.52	0.10	3999.37	2.26	465103.51	700565.31	N 32.277593	W 103.818120
	14969.00	91.45	359.88	11448.19	4092.48	4091.26	156.94	1.80	4094.27	2.20	465198.50	700564.73	N 32.277854	W 103.818121
Exit Lateral Window	15158.00	89.74	359.15	11446.23	4281.43	4280.23	155.34	0.98	4283.05	2.08	465387.46	700563.13	N 32.278373	W 103.818123
	15253.00	90.00	359.73	11446.45	4376.42	4375.23	154.41	0.62	4377.95	2.02	465482.45	700562.20	N 32.278635	W 103.818124
	15347.00	90.07	359.56	11446.39	4470.41	4469.23	153.82	0.20	4471.87	1.97	465575.44	700561.62	N 32.278893	W 103.818125
	15442.00	89.37	359.16	11447.68	4565.37	4564.21	154.76	1.92	4568.76	1.92	465671.41	700561.55	N 32.279154	W 103.818127
	15536.00	90.97	0.35	11448.22	4659.35	4658.19	152.36	3.04	4660.69	1.87	465765.40	700560.15	N 32.279412	W 103.818121
	15631.00	90.01	359.16	11447.41	4754.34	4753.19	151.96	1.61	4755.62	1.83	465860.38	700559.75	N 32.279673	W 103.818126

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (RUS)	Easting (RUS)	Latitude (N/S °)	Longitude (E/W °)
	22428.00	90.05	0.54	11399.05	11547.15	11546.83	110.05	1.01	11547.15	0.55	472653.39	700517.84	N 32.298346	W 103.818156
	22618.00	90.83	0.71	11397.59	11737.14	11736.61	112.12	0.42	11737.14	0.55	472843.36	700519.92	N 32.298869	W 103.818147
	22713.00	90.51	0.01	11396.48	11832.13	11831.60	112.72	0.81	11832.14	0.55	472938.34	700520.51	N 32.299130	W 103.818143
	22808.00	90.64	359.93	11395.53	11927.12	11926.59	112.67	0.16	11927.13	0.54	473033.33	700520.46	N 32.299391	W 103.818142
	22903.00	90.44	359.73	11394.63	12022.11	12021.59	112.39	0.30	12022.12	0.54	473128.32	700520.18	N 32.299652	W 103.818141
	22997.00	90.40	359.46	11393.95	12116.10	12115.59	111.72	0.29	12116.10	0.53	473222.31	700519.52	N 32.299910	W 103.818142
	23092.00	90.46	359.60	11393.23	12211.08	12210.58	110.94	0.16	12211.08	0.52	473317.30	700518.74	N 32.300171	W 103.818143
	23281.00	92.46	359.63	11388.42	12399.99	12399.50	109.67	1.06	12399.99	0.51	473506.21	700517.47	N 32.300691	W 103.818144
	23376.00	92.49	359.42	11384.31	12494.89	12494.41	108.89	0.22	12494.89	0.50	473601.11	700516.68	N 32.300952	W 103.818145
	23471.00	92.47	358.97	11380.20	12589.77	12589.31	107.55	0.47	12589.77	0.49	473696.01	700515.35	N 32.301212	W 103.818148
	23565.00	91.12	358.89	11377.26	12683.69	12683.25	105.80	1.44	12683.69	0.48	473789.94	700513.59	N 32.301471	W 103.818152
	23660.00	90.39	358.58	11376.01	12778.63	12778.22	103.70	0.83	12778.64	0.46	473884.90	700511.50	N 32.301732	W 103.818158
	23755.00	90.53	358.51	11375.25	12873.58	12873.18	101.29	0.16	12873.58	0.45	473979.86	700509.08	N 32.301993	W 103.818164
	23849.00	90.69	358.35	11374.24	12967.51	12967.14	98.72	0.24	12967.52	0.44	474073.81	700506.51	N 32.302251	W 103.818171
	24039.00	90.45	358.62	11372.35	13157.38	13157.07	93.69	0.19	13157.40	0.41	474263.72	700501.49	N 32.302773	W 103.818184
	24133.00	90.38	359.47	11371.67	13251.35	13251.05	92.13	0.91	13251.37	0.40	474357.70	700499.92	N 32.303031	W 103.818188
	24228.00	90.60	1.24	11370.86	13346.34	13346.04	92.71	1.88	13346.36	0.40	474452.69	700500.51	N 32.303293	W 103.818185
	24418.00	90.28	4.74	11369.40	13536.13	13535.75	102.62	1.85	13536.14	0.43	474642.38	700510.42	N 32.303814	W 103.818150
	24512.00	90.60	6.49	11368.68	13629.75	13629.29	111.82	1.89	13629.75	0.47	474735.92	700519.61	N 32.304071	W 103.818118
LTP / 2540ft FSL Crossing	24559.00	90.56	7.49	11368.20	13678.44	13675.94	117.54	2.12	13676.44	0.49	474782.56	700525.33	N 32.304199	W 103.818099
Final MWD Survey	24579.00	90.54	7.91	11368.01	13696.28	13695.76	120.22	2.12	13696.28	0.50	474802.38	700528.01	N 32.304253	W 103.818090
Proj to TD	24610.00	90.54	7.91	11367.72	13727.02	13726.46	124.48	0.00	13727.02	0.52	474833.08	700532.27	N 32.304338	W 103.818076

Survey Type: Def Survey

Survey Error Model: ISCWSA Rev 3 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey
	1	0.000	26.000	1/98.425	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Precious 30-18 Federal Com 3H / Oxy Precious 30-18 Federal Com 3H Gyro+MWD to 24610MD
	1	26.000	26.000	Act Shrs	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Precious 30-18 Federal Com 3H / Oxy Precious 30-18 Federal Com 3H Gyro+MWD to 24610MD
	1	26.000	415.220	Act Shrs	26.400	26.400	GYD_GC+DROP+OH	Precious 30-18 Federal Com 3H / Oxy Precious 30-18 Federal Com Precious 30-18 Federal Com 3H / Oxy Precious 30-18 Federal Com 3H /
	1	415.220	24610.000	Act Shrs	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS	Oxy Precious 30-18 Federal Com 3H Gyro+MWD to 24610MD

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Well Name: PRECIOUS 30-18 FEDERAL COM	Well Location: T23S / R31E / SEC 31 / NWNW / 32.266612 / -103.816879	County or Parish/State: EDDY / NM
Well Number: 3H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM21640	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001546350	Well Status: Producing Oil Well	Operator: OXY USA INCORPORATED

Subsequent Report

Sundry ID: 2731318

Type of Submission: Subsequent Report

Type of Action: Workover Operations

Date Sundry Submitted: 05/16/2023

Time Sundry Submitted: 03:50

Date Operation Actually Began: 02/17/2023

Actual Procedure: RUPU 02/17/23, RIH & clean out to PBTD @ 24568', pressure test casing to 11300# for 30 min, good test. RIH & perf @ 11547-24419' Total 1560 holes. Frac in 52 stages w/ 370940BBL Produced Water + 60005BBL Brackish Water (> 1,000 mg/l TDS and 10,000 mg/l TDS) w/ 32417470# sand, RD Liberty Oilfield Services 03/12/23. Well ready to produce 3/19/23. OXY USA Inc. requests a tubing exception while continuing to flow back this well. The estimated date of tubing install is 07/05/2023.

Well Name: PRECIOUS 30-18 FEDERAL COM	Well Location: T23S / R31E / SEC 31 / NWNE / 32.266612 / -103.816879	County or Parish/State: EDDY / NM
Well Number: 3H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM21640	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001546350	Well Status: Producing Oil Well	Operator: OXY USA INCORPORATED

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JANA MENDIOLA	Signed on: MAY 16, 2023 03:49 PM
Name: OXY USA INCORPORATED	
Title: Regulatory Coordinator	
Street Address: PO BOX 50250	
City: Midland	State: TX
Phone: (432) 685-5936	
Email address: Janalyn_mendiola@oxy.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: JONATHON W SHEPARD	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 05/30/2023
Signature: Jonathon Shepard	

Submit To Appropriate District Office Two Copies District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505				Form C-105 Revised April 3, 2017												
WELL COMPLETION OR RECOMPLETION REPORT AND LOG																		
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)								5. Lease Name or Unit Agreement Name PRECIOUS 30-18 FEDERAL COM										
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER								6. Well Number: 3H										
8. Name of Operator: OXY USA INC.						9. OGRID: 16696												
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710						11. Pool name or Wildcat WC-015 G-08 S233135D; WOLFCAMP												
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County								
Surface:	C	31	23S	31E		570	NORTH	2148	WEST	EDDY								
BH:	K	18	23S	31E		2593	SOUTH	2334	WEST	EDDY								
13. Date Spudded 10/19/2022	14. Date T.D. Reached 01/21/2023		15. Date Rig Released 01/28/2023		16. Date Completed (Ready to Produce) 03/19/2023			17. Elevations (DF and RKB, RT, GR, etc.) 3349' GL										
18. Total Measured Depth of Well 24610'M 11368'V			19. Plug Back Measured Depth 24568'M 11368'V		20. Was Directional Survey Made? YES			21. Type Electric and Other Logs Run CBL										
22. Producing Interval(s), of this completion - Top, Bottom, Name 11547-24419' WOLFCAMP																		
23. CASING RECORD (Report all strings set in well)																		
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED								
13.375" J55		54.5		424'		17.5"		495sx-surf circ										
9.625" HCL80		40		4203'		12.25"		1054sx-surf circ										
7.625" HCL80		26.4		10862'		8.75"		366sx-TOC@6288'										
5.5" P110 ICY		20		24590'		6.75"		1409sx-TOC@6947'										
24. LINER RECORD																		
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN		25. TUBING RECORD		SIZE		DEPTH SET								
26. Perforation record (interval, size, and number) Perf @11547-24419' Total 1560 holes, Hole Size=0.42						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>DEPTH INTERVAL</td> <td>AMOUNT AND KIND MATERIAL USED</td> </tr> <tr> <td>11547-24419'</td> <td>370940BBL Produced Water + 60005BBL Brackish Water (> 1,000 mg/l TDS and < 10,000 mg/l TDS) w/ 32417470# sand</td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>					DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED	11547-24419'	370940BBL Produced Water + 60005BBL Brackish Water (> 1,000 mg/l TDS and < 10,000 mg/l TDS) w/ 32417470# sand				
DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED																	
11547-24419'	370940BBL Produced Water + 60005BBL Brackish Water (> 1,000 mg/l TDS and < 10,000 mg/l TDS) w/ 32417470# sand																	
28. PRODUCTION																		
Date First Production 03/25/2023		Production Method (Flowing, gas lift, pumping - Size and type pump) Flowing				Well Status (Prod. or Shut-in) Prod.												
Date of Test 04/04/2023	Hours Tested 24 hrs.	Choke Size 61/128	Prod'n For Test Period	Oil - Bbl 3262	Gas - MCF 4707	Water - Bbl. 7813	Gas - Oil Ratio 1443											
Flow Tubing Press.	Casing Pressure 1757	Calculated 24-Hour Rate	Oil - Bbl. 3262	Gas - MCF 4707	Water - Bbl. 7813	Oil Gravity - API - (Corr.)												
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD								30. Test Witnessed By										
31. List Attachments WBD																		
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.								33. Rig Release Date:										
34. If an on-site burial was used at the well, report the exact location of the on-site burial: Latitude _____ Longitude _____ NAD83																		
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief																		
Signature:			Printed Name: <u>Jana Mendiola</u>			Title: <u>Sr. Regulatory Analyst</u>			Date: <u>06/04/2023</u>									
E-mail Address: <u>janalyn_mendiola@oxy.com</u>																		

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 354'	T. Bell Canyon 4144'	T. Ojo Alamo	T. Penn A"
T. Salado 686'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 2021'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 4026'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 4985'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 6269'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Spring 7925'	T. Todilto	
T. Abo	T. 1 st Bone Spring 8966'	T. Entrada	
T. Wolfcamp 11499'	T. 2 nd Bone Spring 9665'	T. Wingate	
T. Penn	T. 3 rd Bone Spring 10916'	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....

No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.


No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

(Attach additional sheets if necessary)

From	To	Thickness In Feet	Lithology

OXY USA Inc.
Precious 30-18 Federal Com 3H
API No. 30-015-46350

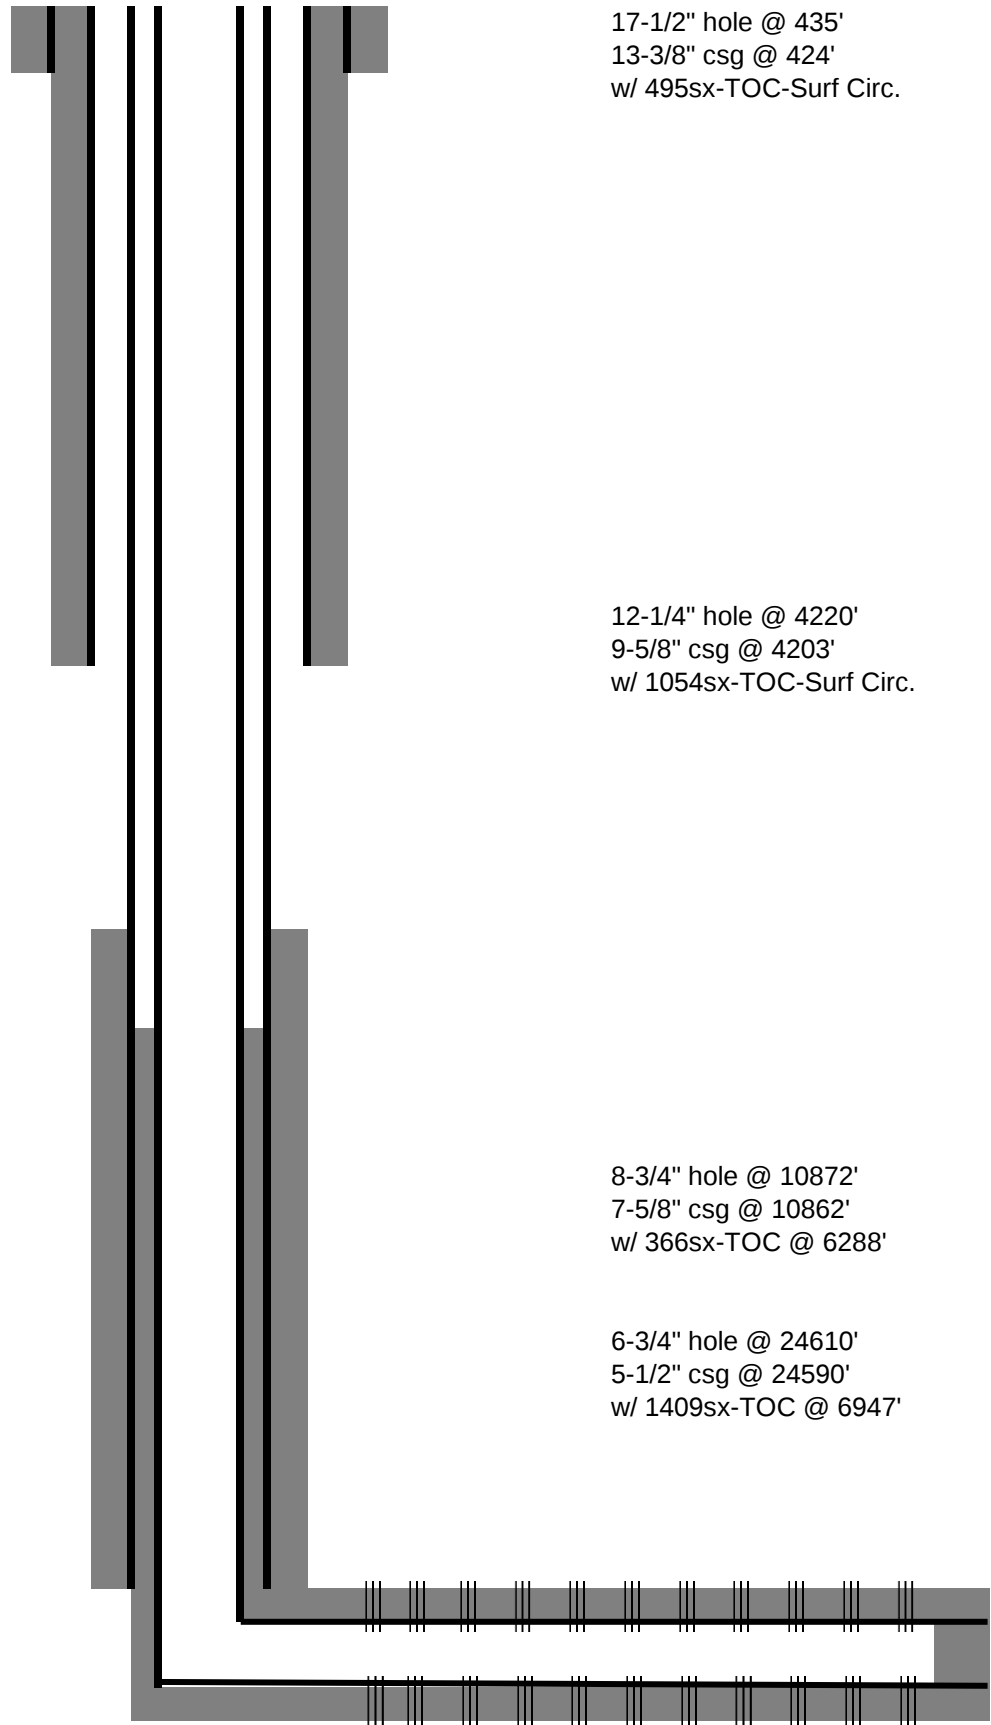

Perfs @ 11547-24419'

TD- 24610'M 11368'V

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 223576

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 223576
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 223576

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 223576
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	File 3160-4 Completion Report within 10 days to NMOCD after BLM approval.	6/12/2023
plmartinez	Submit CBL Well Log (s) in OCD Permitting as [UF-WL] EP Well Log Submission.	6/12/2023