

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address OXY USA INC. PO BOX 50250 MIDLAND, TX 79710		² OGRID Number 16696
		³ Reason for Filing Code/ Effective Date NW -3/1/2023
⁴ API Number 30 - 025-48750	⁵ Pool Name RED TANK; BONE SPRING, EAST	⁶ Pool Code 51687
⁷ Property Code 330703	⁸ Property Name SENILE FELINES 18 7 STATE COM	⁹ Well Number 026H

II. ¹⁰ Surface Location

UL or lot no. O	Section 18	Township 22S	Range 33E	Lot Idn	Feet from the 340	North/South Line South	Feet from the 1560	East/West line East	County Lea
--------------------	---------------	-----------------	--------------	---------	----------------------	---------------------------	-----------------------	------------------------	---------------

¹¹ Bottom Hole Location

UL or lot no. A	Section 7	Township 22S	Range 33E	Lot Idn	Feet from the 54	North/South line North	Feet from the 549	East/West line East	County Lea
¹² Lse Code F	¹³ Producing Method Code F	¹⁴ Gas Connection Date 2/28/2023	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
237722	Centerion Pipeline, L.P.	O
248749	DCP Midstream, LP	G

IV. Well Completion Data

²¹ Spud Date 10/02/2022	²² Ready Date 03/01/2023	²³ TD 21055' M/10675'V	²⁴ PBTD 21011' MD, 10680' TVD	²⁵ Perforations 10732'-20916'	²⁶ DHC, MC
²⁷ Hole Size	²⁸ Casing & Tubing Size	²⁹ Depth Set	³⁰ Sacks Cement		
17 1/2"	13 3/8" 54.5# J55	964'	1205 sx - TOC 0'		
12 1/4"	9 5/8" 40# HCL80	6640'	1704 sx - TOC 0'		
8 3/4"x 8 1/2"	5 1/2" 20# P110	21035'	2955 sx - TOC 5419'		
	2-3/8" TBG	10697'			

V. Well Test Data

³¹ Date New Oil 3/3/2023	³² Gas Delivery Date 2/28/2023	³³ Test Date 3/14/2023	³⁴ Test Length 24 HOURS	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 378
³⁷ Choke Size	³⁸ Oil 1608	³⁹ Water 4381	⁴⁰ Gas 1606		⁴¹ Test Method FLOWING
⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: <i>Leslie T. Reeves</i>			OIL CONSERVATION DIVISION		
Printed name: LESLIE REEVES			Approved by: <i>PATRICIA MARTINEZ</i>		
Title: REGULATORY MANAGER			Title: <i>PETROLEUM SPECIALIST</i>		
E-mail Address: LESLIE_REEVES@OXY.COM			Approval Date: <i>7/20/2023</i>		
Date: 07/17/2023		Phone: 713-497-2492			

1625 N. French Dr., Hobbs, NM 88240
 Phone: (575) 393-6161 Fax: (575) 393-0720
District II
 811 S. First St., Artesia, NM 88210
 Phone: (575) 748-1283 Fax: (575) 748-9720
District III
 1000 Rio Brazos Road, Aztec, NM 87410
 Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505
 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
 Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

Revised August 1, 2011
 Submit one copy to appropriate
 District Office

☐ AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-025-48750	² Pool Code 51687	³ Pool Name RED TANK, BONE SPRING, EAST
⁴ Property Code 330703	Property Name SENILE FELINES 18_7 STATE COM	
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁶ Well Number 26H
		⁹ Elevation 3633'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
O	18	22S	33E		340	SOUTH	1560	EAST	LEA
¹¹ Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	7	22S	33E		54	NORTH	549	EAST	LEA
¹² Dedicated Acres 640.0	¹³ Joint or Infill	¹⁴ Consolidation Code		¹⁵ Order No.					

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

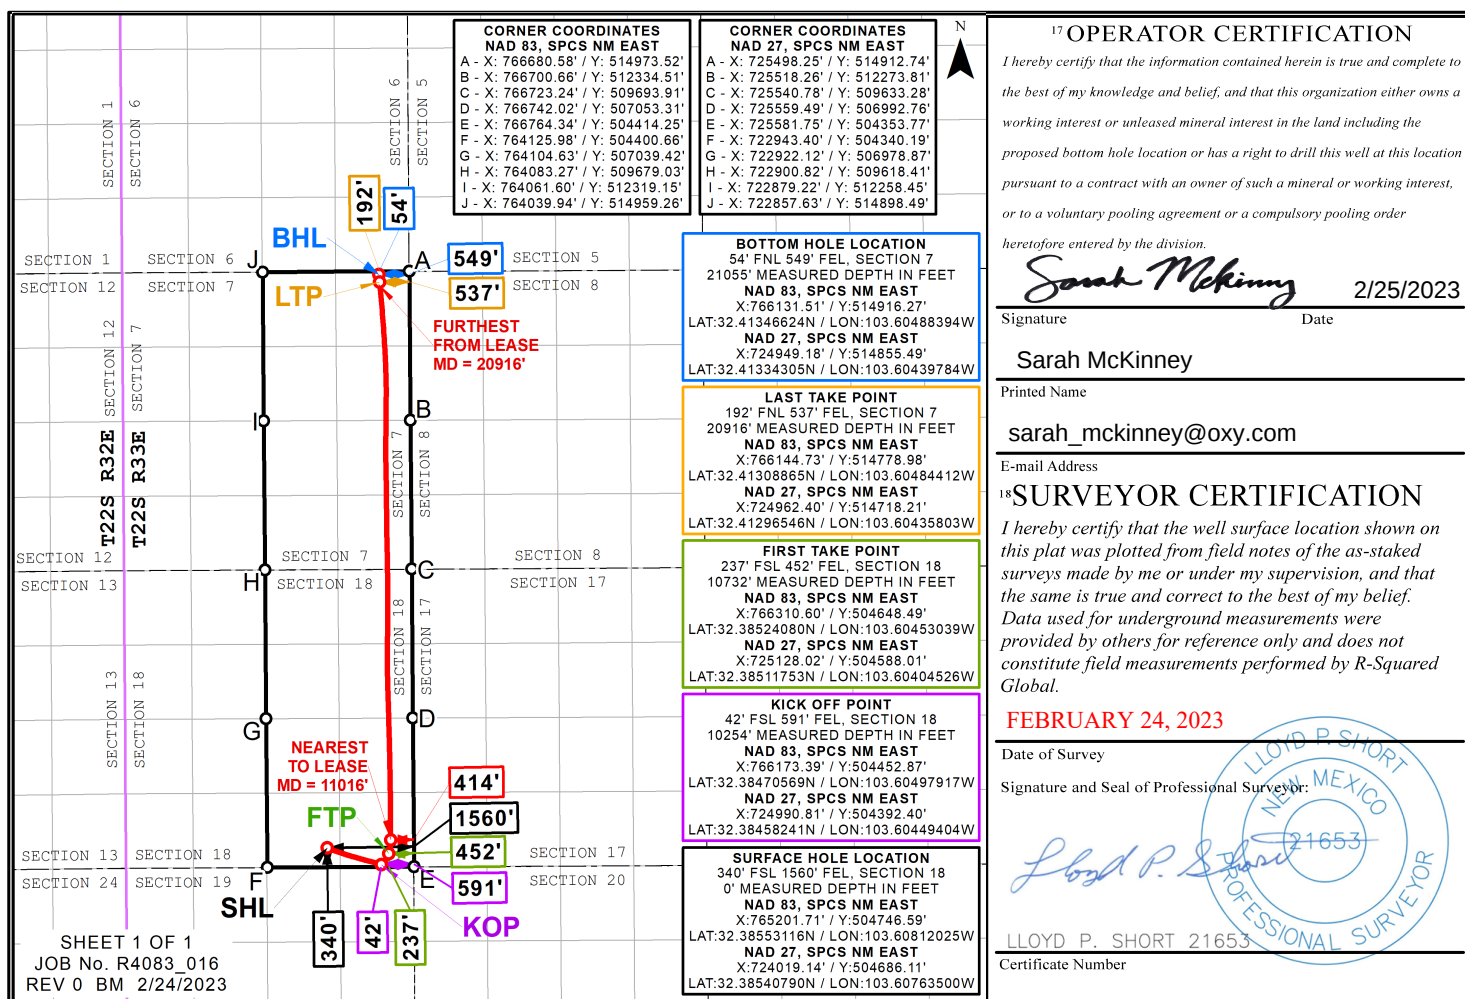

Distances/areas relative to NAD 83 Combined Scale Factor: 0.9997856 Convergence Angle: 0.3742167

☐ Horizontal Spacing Unit

Schlumberger


OXY



Borehole:				Well:				Field:				Structure:			
Senile Felines 18_7 State Com 26H				Senile Felines 18_7 State Com 26H				NM Lea County (NAD 83)				Oxy Senile Felines 18_7 State Com Pad (Citadel 2)			
Gravity & Magnetic Parameters						Surface Location						NAD83 New Mexico State Plane, Eastern Zone, US Feet		Miscellaneous	
Model: IFR1		Dip: 60.094°		Date: 06-Dec-2022		Lat: N 32 23 7.91		Northing: 504746.59RUS		Grid Conv: 0.3884°		Slot: 18_7 State Com 26H		TVD Ref: RKB(3657ft above MSL)	
MagDec: 6.43°		FS: 47810.3nT		Gravity FS: 998.459mgn (9.80665 Based)		Lon: W 103 36 29.23		Easting: 765201.71RUS		Scale Fact: 0.99996649		Plan: Oxy Senile Felines 18_7 State Com 26H Gyro-MWD 0° to 21055MD			

Critical Points

Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)S(-)	E(+)W(-)	DLS
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
SHL	24.00	0.00	0.00	24.00	0.00	0.00	0.00	0.00
First Gyro Survey	90.93	0.07	244.84	90.93	-0.02	-0.02	-0.04	0.10
Last Gyro Survey	924.03	1.15	246.20	923.95	-3.32	-2.29	-10.20	0.10
First SLB Survey	1079.00	0.35	244.25	1078.90	-4.33	-3.13	-12.05	0.52
Actual KOP	10254.50	18.71	78.11	10148.94	-193.71	-293.68	971.84	17.04
100° FSL Crossing	10452.00	28.41	32.37	10328.24	-136.20	-242.17	1033.56	7.65
2nd Bone Spring Intersection	10678.47	40.57	29.00	10516.00	-19.92	-131.37	1093.33	6.92
Exit Target Window	20305.00	90.03	355.45	10713.03	9476.84	9424.37	996.51	0.33
100° FNL Crossing	21007.00	96.07	354.37	10680.73	10165.17	10122.57	934.56	1.29
Final MWD Survey	21014.00	96.14	354.31	10679.98	10171.99	10129.49	933.88	1.29
Proj to TD	21055.00	96.14	354.31	10675.60	10211.93	10170.06	929.83	0.00

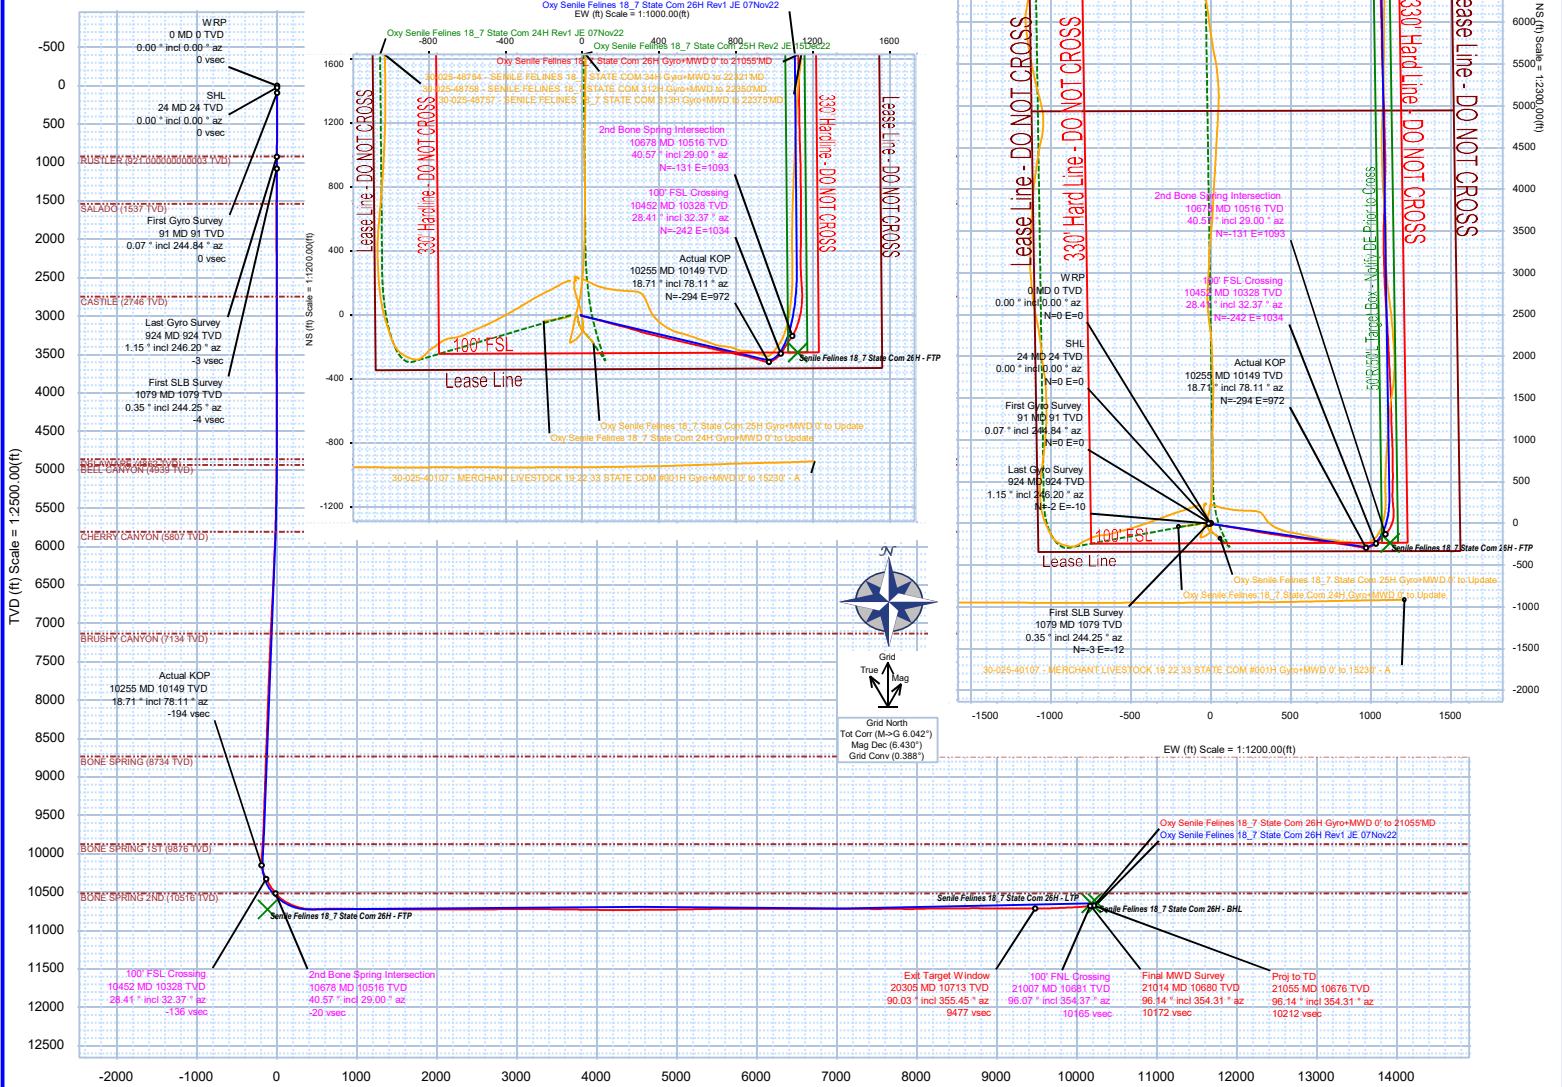

Schlumberger



Oxy Senile Felines 18_7 State Com 26H Gyro+MWD 0' to 21055'MD Survey Geodetic Report (Def Survey)

Report Date: December 27, 2022 - 08:36 AM Client: OXY Field: NM Lea County (NAD 83) Structure / Slot: Oxy Senile Felines 18_7 State Com Pad (Citadel 2) / Senile Felines 18_7 State Com 26H Well: Senile Felines 18_7 State Com 26H Borehole: Senile Felines 18_7 State Com 26H UWI / API#: Unknown / Unknown Survey Name: Oxy Senile Felines 18_7 State Com 26H Gyro+MWD 0' to 21055'MD Survey Date: November 07, 2022 212.243° / 11570.609 ft / 6.683 / 1.078 Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet Location Lat / Long: N 32° 23' 7.91212", W 103° 36' 29.23294" Location Grid N/E Y/X: N 504746.590 RUS, E 765201.710 RUS CRS Grid Convergence Angle: 0.3884 ° Grid Scale Factor: 0.99996649 Version / Patch: 2.10.829.1	Survey / DLS Computation: Minimum Curvature / Lubinski Vertical Section Azimuth: 5.815 ° (Grid North) Vertical Section Origin: 0.000 ft, 0.000 ft TVD Reference Datum: RKB TVD Reference Elevation: 3657.000 ft above MSL Seabed / Ground Elevation: 3633.000 ft above MSL Magnetic Declination: 6.430 ° Total Gravity Field Strength: 998.458mgm (9.80665 Based) Gravity Model: GARM Total Magnetic Field Strength: 47810.300 nT Magnetic Dip Angle: 60.094 ° Declination Date: December 06, 2022 Magnetic Declination Model: IFR1 North Reference: Grid North Grid Convergence Used: 0.3900 ° Total Corr Mag North->Grid North: 6.0400 ° Local Coord Referenced To: Well Head	
--	---	--

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	0.00	0.00	504746.59	765201.71	N 32° 23' 7.91"	W 103° 36' 29.23"
SHL	24.00	0.00	0.00	24.00	0.00	0.00	0.00	0.00	0.00	0.00	504746.59	765201.71	N 32° 23' 7.91"	W 103° 36' 29.23"
First Gyro Survey	90.93	0.07	244.84	90.93	-0.02	-0.02	-0.04	0.10	0.04	244.84	504746.57	765201.67	N 32° 23' 7.91"	W 103° 36' 29.23"
	175.52	0.42	325.26	175.52	0.19	0.22	-0.26	0.49	0.34	309.59	504746.81	765201.45	N 32° 23' 7.91"	W 103° 36' 29.24"
	263.99	0.46	265.53	263.99	0.37	0.45	-0.80	0.50	0.92	299.61	504747.04	765200.91	N 32° 23' 7.92"	W 103° 36' 29.24"
	358.25	0.52	275.28	358.24	0.30	0.46	-1.60	0.11	1.67	286.15	504747.05	765200.11	N 32° 23' 7.92"	W 103° 36' 29.25"
	452.61	0.76	271.84	452.60	0.25	0.52	-2.65	0.26	2.71	281.11	504747.11	765199.06	N 32° 23' 7.92"	W 103° 36' 29.26"
	546.96	0.87	262.38	546.94	0.04	0.44	-3.99	0.18	4.01	276.35	504747.03	765197.72	N 32° 23' 7.92"	W 103° 36' 29.28"
	641.23	0.96	248.76	641.20	-0.49	0.06	-5.44	0.25	5.44	270.67	504746.65	765196.28	N 32° 23' 7.91"	W 103° 36' 29.30"
	735.43	1.09	241.02	735.38	-1.36	-0.66	-6.95	0.20	6.99	264.61	504745.93	765194.76	N 32° 23' 7.91"	W 103° 36' 29.31"
	829.76	1.09	242.75	829.69	-2.36	-1.50	-8.54	0.03	8.67	260.02	504745.09	765193.17	N 32° 23' 7.90"	W 103° 36' 29.33"
	924.03	1.15	246.20	923.95	-3.32	-2.29	-10.20	0.10	10.45	257.32	504744.30	765191.51	N 32° 23' 7.89"	W 103° 36' 29.35"
Last Gyro Survey	1079.00	0.35	244.25	1078.90	-4.33	-3.13	-12.05	0.52	12.45	255.45	504743.46	765189.66	N 32° 23' 7.88"	W 103° 36' 29.37"
	1174.00	0.08	242.34	1173.90	-4.52	-3.28	-12.37	0.28	12.80	255.13	504743.31	765189.34	N 32° 23' 7.88"	W 103° 36' 29.38"
	1269.00	0.27	225.33	1268.90	-4.73	-3.47	-12.59	0.21	13.06	254.58	504743.12	765189.12	N 32° 23' 7.88"	W 103° 36' 29.38"
	1364.00	0.27	192.10	1363.90	-5.13	-3.85	-12.79	0.16	13.36	253.26	504742.74	765188.92	N 32° 23' 7.87"	W 103° 36' 29.38"
	1526.00	0.20	177.20	1525.90	-5.78	-4.50	-12.86	0.06	13.63	250.69	504742.09	765188.85	N 32° 23' 7.87"	W 103° 36' 29.38"
	1621.00	0.18	215.15	1620.90	-6.08	-4.79	-12.94	0.13	13.80	249.67	504741.80	765188.77	N 32° 23' 7.87"	W 103° 36' 29.38"
	1716.00	0.11	210.84	1715.90	-6.29	-4.99	-13.07	0.07	13.99	249.09	504741.60	765188.64	N 32° 23' 7.86"	W 103° 36' 29.39"
	1812.00	0.07	124.48	1811.90	-6.40	-5.10	-13.07	0.13	14.03	248.66	504741.49	765188.64	N 32° 23' 7.86"	W 103° 36' 29.39"
	1907.00	0.09	67.94	1906.90	-6.40	-5.11	-12.95	0.08	13.92	248.47	504741.48	765188.76	N 32° 23' 7.86"	W 103° 36' 29.38"
	2002.00	0.15	51.49	2001.90	-6.27	-5.00	-12.79	0.07	13.73	248.62	504741.59	765188.93	N 32° 23' 7.86"	W 103° 36' 29.38"
First SLB Survey	2097.00	0.27	32.20	2096.90	-5.99	-4.74	-12.57	0.14	13.43	249.35	504741.85	765189.14	N 32° 23' 7.87"	W 103° 36' 29.38"
	2192.00	0.22	72.03	2191.90	-5.71	-4.49	-12.28	0.18	13.07	249.90	504742.10	765189.43	N 32° 23' 7.87"	W 103° 36' 29.38"
	2287.00	0.23	67.01	2286.89	-5.55	-4.36	-11.93	0.02	12.70	249.92	504742.23	765189.78	N 32° 23' 7.87"	W 103° 36' 29.37"
	2382.00	0.34	86.95	2381.89	-5.41	-4.27	-11.47	0.15	12.24	249.57	504742.32	765190.24	N 32° 23' 7.87"	W 103° 36' 29.37"
	2477.00	0.31	82.08	2476.89	-5.31	-4.22	-10.93	0.04	11.72	248.89	504742.37	765190.78	N 32° 23' 7.87"	W 103° 36' 29.36"
	2572.00	0.26	77.35	2571.89	-5.18	-4.14	-10.47	0.06	11.26	248.43	504742.45	765191.24	N 32° 23' 7.87"	W 103° 36' 29.36"
	2668.00	0.34	93.27	2667.89	-5.10	-4.11	-9.97	0.12	10.78	247.62	504742.48	765191.74	N 32° 23' 7.87"	W 103° 36' 29.35"
	2763.00	0.30	95.05	2762.89	-5.08	-4.14	-9.44	0.04	10.31	246.30	504742.45	765192.27	N 32° 23' 7.87"	W 103° 36' 29.34"
	2858.00	0.30	92.67	2857.89	-5.06	-4.18	-8.95	0.01	9.87	244.97	504742.41	765192.76	N 32° 23' 7.87"	W 103° 36' 29.34"
	2953.00	0.26	82.00	2952.89	-5.00	-4.16	-8.48	0.07	9.45	243.88	504742.43	765193.23	N 32° 23' 7.87"	W 103° 36' 29.33"
	3048.00	0.34	97.82	3047.88	-4.96	-4.17	-7.99	0.12	9.01	242.46	504742.42	765193.72	N 32° 23' 7.87"	W 103° 36' 29.33"
	3143.00	0.25	106.18	3142.88	-5.00	-4.26	-7.51	0.10	8.64	240.42	504742.33	765194.20	N 32° 23' 7.87"	W 103° 36' 29.32"
	3238.00	0.33	115.44	3237.88	-5.13	-4.44	-7.07	0.10	8.35	237.86	504742.15	765194.64	N 32° 23' 7.87"	W 103° 36' 29.32"
	3333.00	0.35	179.91	3332.88	-5.51	-4.85	-6.82	0.38	8.37	234.60	504741.74	765194.89	N 32° 23' 7.86"	W 103° 36' 29.31"
	3428.00	0.31	235.03	3427.88	-5.97	-5.28	-7.03	0.32	8.80	233.07	504741.31	765194.68	N 32° 23' 7.86"	W 103° 36' 29.32"
	3523.00	0.30	259.26	3522.88	-6.21	-5.48	-7.49	0.14	9.28	233.80	504741.11	765194.23	N 32° 23' 7.86"	W 103° 36' 29.32"
	3618.00	0.19	358.04	3617.88	-6.12	-5.37	-7.74	0.40	9.41	235.24	504741.22	765193.98	N 32° 23' 7.86"	W 103° 36' 29.32"
	3713.00	0.26	37.18	3712.88	-5.78	-5.04	-7.61	0.17	9.13	236.49	504741.55	765194.10	N 32° 23' 7.86"	W 103° 36' 29.32"
	3808.00	0.30	81.98	3807.88	-5.54	-4.83	-7.23	0.23	8.70	236.26	504741.76	765194.48	N 32° 23' 7.86"	W 103° 36' 29.32"
	3903.00	0.32	79.64	3902.87	-5.41	-4.75	-6.73	0.02	8.23	234.77	504741.84	765194.98	N 32° 23' 7.87"	W 103° 36' 29.31"
	3999.00	0.16	111.58	3998.87	-5.37	-4.75	-6.34	0.21	7.92	233.15	504741.84	765195.37	N 32° 23' 7.87"	W 103° 36' 29.31"
	4188.00	0.25	105.78	4187.87	-5.51	-4.96	-5.70	0.05	7.55	228.95	504741.63	765196.01	N 32° 23' 7.86"	W 103° 36' 29.30"
	4283.00	0.21	75.51	4282.87	-5.49	-4.97	-5.33	0.13	7.29	226.98	504741.62	765196.38	N 32° 23' 7.86"	W 103° 36' 29.30"
	4378.00	0.22	26.75	4377.87	-5.26	-4.77	-6.08	0.19	6.96	226.81	504741.82	765196.63	N 32° 23' 7.87"	W 103° 36' 29.29"
	4473.00	0.19	62.88	4472.87	-5.00	-4.53	-4.85	0.14	6.64	226.97	504742.06	765196.86	N 32° 23' 7.87"	W 103° 36' 29.29"
	4569.00	0.08	80.87	4568.87	-4.90	-4.45	-4.65	0.12	6.43	226.25	504742.14	765197.06	N 32° 23' 7.87"	W 103° 36' 29.29"
	4664.00	0.27	87.51	4663.87	-4.85	-4.43	-4.36	0.20	6.21	224.54	504742.16	765197.35	N 32° 23' 7.87"	W 103° 36' 29.28"
	4759.00	0.60	102.50	4758.87	-4.87	-4.53	-3.65	0.36	5.81	218.88	504742.06	765198.06	N 32° 23' 7.87"	W 103° 36' 29.28"
	4854.00	0.83	112.03	4853.86	-5.12	-4.89	-2.53	0.27	5.51	207.30	504741.70	765199.19	N 32° 23' 7.86"	W 103° 36' 29.26"
	4949.00	1.16	113.24	4948.84	-5.60	-5.53	-1.00	0.35	5.62	190.29	504741.06	765200.71	N 32° 23' 7.86"	W 103° 36' 29.25"
	5044.00	1.91	115.28	5043.81	-6.42	-6.58	1.31	0.79	6.71	168.74	504740.01	765203.02	N 32° 23' 7.85"	W 103° 36' 29.22"
	5139.00	2.77	114.31	5138.73	-7.67	-8.21	4.83	0.91	9.52	149.49	504738.38	765206.55	N 32° 23' 7.83"	W 103° 36' 29.18"
	5234.00	3.70	109.42	5233.58	-8.12	-10.17	9.82	1.02	14.14	136.01	504736.42	765211.53	N 32° 23' 7.81"	W 103° 36' 29.12"
	5329.00	4.78	106.62	5328.32	-10.59	-12.32	16.50	1.26	20.80	126.76	504734.27	765218.21	N 32° 23' 7.79"	W 103° 36' 29.04"
	5424.00	5.70	105.60	5422.92	-12.14	-14.73	24.84	0.97	28.88	120.67	504731.86	765226.55	N 32° 23' 7.76"	W 103° 36' 28.94"
	5520.00	6.76	106.70	5518.35	-14.01	-17.63	34.84	1.11	39.05	116.85	504728.96	765236.55	N 32° 23' 7.74"	W 103° 36' 28.83"
	5615.00	7.46	106.48	5612.62	-16.21	-20.99	46.11	0.74	50.66	114.48	504725.60	765247.82	N 32° 23' 7.70"	W 103° 36' 28.70"
	5710.00	8.38	106.42	5706.71	-18.63	-24.70	58.66	0.97	63.65	112.83	504721.89	765260.37	N 32° 23' 7.66"	W 103° 36' 28.55"
	5805.00	9.17	106.40	5800.60	-21.29	-28.79	72.57	0.83	78.07	111.64	504717.80	765274.27	N 32° 23' 7.62"	W 103° 36' 28.39"
	5905.00	9.86	106.39	5894.29	-24.25	-33.30	87.61	0.73	93.72	110.81	504713.29	765289.32	N 32° 23' 7.58"	W 103° 36' 28.21"
	5990.00	10.62	108.24	5897.78	-27.70	-38.41	103.71	0.84	110.59	110.32	504708.19	765305.41	N 32° 23' 7.53"	W 103° 36' 28.03"
	6090.00	11.14	108.03	6091.07	-31.53	-50.94	126.59	1.02	126.59	110.02	504703.70	765327.84	N 32° 23' 7.47"	W 103° 36' 27.83"
	6185.00	11.37	106.78	6174.24	-35.25	-49.53	138.44	0.35	147.03	109.69	504697.06	765340.14	N 32° 23' 7.41"	W 103° 36' 27.62"
	6280.00	11.43	108.43	6267.37	-39.09	-55.21	156.33	0.35	165.80	109.45	504691.38	765358.04	N 32° 23' 7.36"	W 103° 36' 27.41"
	6375.00	12.10	108.58	6360.37	-43.34	-61.36	174.70	0.17	185.17	109.35	504685.23	765376.41	N 32° 23' 7.29"	W 103° 36' 27.20"
	6470.00	12.24	107.61	6453.24	-47.60	-67.58	1							

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (E/W'')	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Eastings (ftUS)	Latitude (N/S'')	Longitude (E/W'')
Actual KOP	9965.00	14.05	108.83	9870.70	-179.88	-272.04	895.81	0.24	936.21	106.98	504474.56	766097.49	N 32 23 5.16	W 103 36 18.81
	10060.00	16.89	109.68	9962.25	-185.79	-280.42	919.72	3.00	961.52	106.96	504466.19	766121.40	N 32 23 5.08	W 103 36 18.53
	10155.00	16.05	110.36	10053.35	-192.39	-289.63	945.03	0.91	988.42	107.04	504456.97	766146.71	N 32 23 4.98	W 103 36 18.24
	10205.00	15.09	104.68	10101.52	-195.13	-293.69	957.81	3.60	1001.82	107.05	504452.91	766159.48	N 32 23 4.94	W 103 36 18.09
	10254.50	18.71	78.11	10148.94	-193.71	-293.68	971.84	17.04	1015.24	106.81	504452.92	766173.51	N 32 23 4.94	W 103 36 17.92
	10300.00	24.19	62.96	10191.31	-186.42	-287.53	987.30	17.04	1028.43	106.26	504458.67	766188.98	N 32 23 5.00	W 103 36 17.74
	10395.00	26.01	40.35	10277.53	-158.64	-263.15	1018.20	10.22	1051.66	104.49	504483.45	766219.87	N 32 23 5.24	W 103 36 17.38
	10452.00	28.41	32.37	10328.24	-136.20	-242.17	1033.56	7.65	1061.55	103.19	504504.43	766235.23	N 32 23 5.45	W 103 36 17.20
	10490.00	30.23	27.75	10361.37	-119.24	-226.06	1042.85	7.65	1067.07	102.23	504520.54	766244.53	N 32 23 5.61	W 103 36 17.09
	10585.00	34.16	27.66	10441.75	-72.28	-181.26	1066.38	4.14	1081.67	99.65	504565.34	766268.05	N 32 23 6.05	W 103 36 16.81
100' FSL Crossing	10678.47	40.57	28.00	10516.00	-19.92	-131.37	1093.33	6.92	1101.19	96.85	504615.22	766295.00	N 32 23 6.54	W 103 36 16.49
	10680.00	40.68	28.02	10517.16	-19.01	-130.50	1103.81	6.92	1101.57	96.80	504616.09	766295.48	N 32 23 6.55	W 103 36 16.49
	10776.00	51.53	15.85	10583.77	47.10	-66.66	1119.39	14.97	1121.37	93.41	504679.94	766321.06	N 32 23 7.18	W 103 36 16.18
	10871.00	60.16	9.78	10637.09	125.02	9.92	1136.59	10.50	1136.63	89.50	504756.51	766338.26	N 32 23 7.93	W 103 36 15.98
	10966.00	68.61	1.24	10678.19	210.50	95.02	1144.57	12.02	1148.51	85.25	504841.61	766346.24	N 32 23 8.78	W 103 36 15.88
	11060.00	77.19	356.45	10705.82	299.55	184.73	1142.68	11.34	1157.52	80.82	504931.31	766344.35	N 32 23 9.66	W 103 36 15.89
	11155.00	89.68	357.84	10721.36	392.15	278.28	1138.71	7.28	1171.55	76.26	505024.86	766339.69	N 32 23 10.59	W 103 36 15.94
	11205.00	89.88	0.13	10724.04	441.89	328.17	1137.14	12.67	1183.55	73.90	505074.75	766338.81	N 32 23 11.08	W 103 36 15.94
	11232.00	90.62	0.46	10723.92	468.57	355.17	1137.28	3.00	1191.45	72.66	505101.75	766338.95	N 32 23 11.35	W 103 36 15.95
	11273.00	92.35	0.83	10722.86	509.39	396.15	1137.74	4.31	1204.74	70.80	505142.73	766339.41	N 32 23 11.76	W 103 36 15.93
2nd Bone Spring Intersection	11368.00	92.45	0.71	10718.88	603.94	491.06	1139.02	0.16	1240.36	66.68	505237.63	766340.69	N 32 23 12.69	W 103 36 15.91
	11463.00	89.97	359.66	10716.87	699.45	586.03	1139.32	2.83	1281.20	62.78	505332.60	766340.99	N 32 23 13.63	W 103 36 15.90
	11558.00	89.97	359.60	10717.42	792.89	681.03	1138.71	0.63	1326.82	59.12	505427.59	766340.38	N 32 23 14.57	W 103 36 15.90
	11653.00	89.34	359.70	10718.49	887.34	776.02	1138.13	0.11	1377.51	55.71	505522.58	766339.80	N 32 23 15.51	W 103 36 15.90
	11749.00	89.10	359.81	10719.80	982.79	872.01	1137.72	0.28	1433.46	52.53	505618.57	766339.39	N 32 23 16.46	W 103 36 15.90
	11844.00	88.74	358.42	10721.59	1077.12	966.98	1136.25	1.51	1492.02	49.60	505713.53	766337.92	N 32 23 17.40	W 103 36 15.91
	11939.00	89.59	358.45	10722.97	1171.33	1061.93	1133.66	0.90	1553.33	46.87	505808.48	766335.33	N 32 23 18.34	W 103 36 15.93
	12034.00	90.26	359.12	10723.10	1265.61	1156.91	1131.64	1.00	1618.35	44.37	505903.46	766333.51	N 32 23 19.28	W 103 36 15.94
	12129.00	89.71	359.05	10723.12	1359.66	1251.90	1130.13	0.58	1686.54	42.07	505998.44	766331.80	N 32 23 20.22	W 103 36 15.96
	12224.00	90.25	359.85	10723.15	1454.37	1346.89	1129.21	1.02	1757.62	39.98	506093.43	766330.88	N 32 23 21.16	W 103 36 15.96
100' FNL Crossing	12319.00	89.59	359.31	10723.29	1548.81	1441.89	1128.52	0.90	1831.01	38.05	506188.43	766330.19	N 32 23 22.10	W 103 36 15.96
	12414.00	89.64	358.82	10723.93	1643.14	1536.87	1126.97	0.52	1905.79	36.25	506283.41	766328.64	N 32 23 23.04	W 103 36 15.97
	12509.00	89.62	358.36	10724.54	1737.39	1631.84	1124.63	0.48	1981.84	34.57	506378.37	766326.30	N 32 23 23.98	W 103 36 15.99
	12604.00	89.52	358.45	10725.16	1831.59	1726.80	1121.94	0.14	2059.29	33.01	506473.33	766324.65	N 32 23 24.92	W 103 36 16.01
	12699.00	89.70	358.65	10725.90	1925.83	1821.77	1119.58	0.28	2138.29	31.57	506568.29	766321.25	N 32 23 25.86	W 103 36 16.03
	12794.00	89.89	358.52	10726.24	2020.07	1916.74	1117.24	0.24	2218.58	30.24	506663.26	766318.91	N 32 23 26.80	W 103 36 16.05
	12889.00	89.76	358.33	10726.53	2114.28	2011.70	1114.62	0.24	2299.86	28.99	506758.22	766316.29	N 32 23 27.74	W 103 36 16.08
	12984.00	90.46	358.52	10726.35	2208.49	2106.67	1112.01	0.73	2382.15	27.83	506853.18	766313.68	N 32 23 28.68	W 103 36 16.10
	13080.00	90.29	358.33	10725.72	2303.69	2202.63	1109.37	0.27	2466.23	26.73	506949.14	766311.05	N 32 23 29.63	W 103 36 16.12
	13174.00	90.37	358.49	10725.18	2396.91	2296.59	1106.77	0.19	2549.36	25.73	507043.10	766308.44	N 32 23 30.56	W 103 36 16.14
100' FNL Crossing	13269.00	90.21	358.31	10724.70	2491.11	2391.55	1104.11	0.25	2634.12	24.78	507138.06	766305.78	N 32 23 31.50	W 103 36 16.17
	13364.00	90.36	358.13	10724.22	2585.28	2486.50	1101.16	0.25	2719.42	23.89	507233.01	766302.83	N 32 23 32.44	W 103 36 16.19
	13459.00	90.20	358.07	10723.76	2679.41	2581.45	1098.01	0.18	2805.27	23.04	507327.95	766299.68	N 32 23 33.38	W 103 36 16.22
	13554.00	90.38	358.22	10723.28	2773.56	2676.40	1094.94	0.25	2891.71	22.25	507422.90	766296.61	N 32 23 34.32	W 103 36 16.25
	13649.00	90.38	358.19	10722.82	2867.73	2771.35	1092.82	0.35	2978.72	21.51	507517.84	766293.63	N 32 23 35.26	W 103 36 16.28
	13745.00	90.06	358.38	10722.83	2962.90	2867.31	1089.09	0.20	3067.18	20.80	507613.80	766290.76	N 32 23 36.21	W 103 36 16.31
	13840.00	90.52	359.12	10722.35	3057.17	2962.29	1087.02	0.92	3155.43	20.15	507708.77	766288.69	N 32 23 37.15	W 103 36 16.32
	13935.00	90.25	359.28	10721.71	3151.54	3057.27	1085.69	0.33	3244.33	19.55	507803.76	766287.36	N 32 23 38.09	W 103 36 16.33
	14030.00	90.20	359.20	10721.34	3245.91	3152.26	1084.43	0.10	3333.58	18.98	507898.74	766286.10	N 32 23 39.03	W 103 36 16.34
	14125.00	88.89	358.61	10722.09	3340.22	3247.24	1082.62	0.51	3422.96	18.44	507993.72	766284.29	N 32 23 39.97	W 103 36 16.35
100' FNL Crossing	14220.00	89.34	359.34	10722.56	3434.59	3342.22	1081.45	0.53	3512.83	17.93	508088.69	766281.61	N 32 23 40.91	W 103 36 16.36
	14315.00	89.69	0.42	10724.36	3529.13	3437.22	1081.79	0.58	3603.43	17.47	508183.68	766283.47	N 32 23 41.85	W 103 36 16.34
	14410.00	88.67	0.64	10725.72	3623.72	3532.20	1082.67	1.10	3694.40	17.04	508278.67	766284.35	N 32 23 42.79	W 103 36 16.33
	14505.00	89.65	0.86	10727.12	3718.34	3627.18	1083.92	1.06	3785.67	16.64	508373.64	766285.59	N 32 23 43.73	W 103 36 16.31
	14601.00	88.79	0.86	10728.42	3813.97	3723.16	1085.36	0.90	3878.13	16.25	508469.62	766287.03	N 32 23 44.68	W 103 36 16.28
	14696.00	89.26	1.10	10730.04	3908.62	3818.13	1086.98	0.56	3969.84	15.99	508564.59	766288.65	N 32 23 45.62	W 103 36 16.26
	14790.00	89.04	0.											

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type		Borehole / Survey					
	1	0.000	24.000	1/98.425	26.400	26.400	GYD_GC+DROP+OH-Depth Only		Senile Felines 18_7 State Com 26H / Oxy Senile Felines 18_7 State Com 26H Gyro+MWD 0' to Senile Felines 18_7 State Com 26H / Oxy Senile Felines 18_7 State Com 26H Gyro+MWD 0' to					
	1	24.000	24.000	Act Stns	26.400	26.400	GYD_GC+DROP+OH-Depth Only		Senile Felines 18_7 State Com 26H / Oxy Senile Felines 18_7 State Com 26H Gyro+MWD 0' to					
	1	24.000	924.000	Act Stns	26.400	26.400	GYD_GC+DROP+OH		Senile Felines 18_7 State Com 26H / Oxy Senile Felines 18_7 State Com 26H Gyro+MWD 0' to					
	1	924.000	4283.000	Act Stns	26.400	26.400	A009Mb_MWD+IFR1+SAG		Senile Felines 18_7 State Com 26H / Oxy Senile Felines 18_7 State Com 26H Gyro+MWD 0' to					
	1	4283.000	21055.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS		Senile Felines 18_7 State Com 26H / Oxy Senile Felines 18_7 State Com 26H Gyro+MWD 0' to					

Intent ☐ As Drilled ☒

API # 30-025-48750		
Operator Name: OXY USA INC.	Property Name: SENILE FELINES 18 7 STATE COM	Well Number 026H

Kick Off Point (KOP)

UL P	Section 18	Township 22S	Range 33E	Lot	Feet 42	From N/S South	Feet 591	From E/W East	County Lea
Latitude 32.38470569					Longitude -103.60497917			NAD Nad 83	

First Take Point (FTP)

UL P	Section 18	Township 22S	Range 33E	Lot	Feet 237	From N/S South	Feet 452	From E/W East	County Lea
Latitude 32.38524080					Longitude -103.60453039			NAD Nad 83	

Last Take Point (LTP)

UL A	Section 7	Township 22S	Range 33E	Lot	Feet 192	From N/S North	Feet 537	From E/W East	County Lea
Latitude 32.41308865					Longitude -103.60484412			NAD Nad 83	

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☒

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API # 30-025-48749		
Operator Name: OXY USA INC.	Property Name: Senile Felines 18-7 State Com	Well Number 25H

KZ 06/29/2018

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG								1. WELL API NO. 30-025-48750		
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)								5. Lease Name or Unit Agreement Name SENILE FELINES 18-7 STATE COM		
								6. Well Number: #026H		
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER _____										
8. Name of Operator OXY USA INC.						9. OGRID 16696				
10. Address of Operator 5 GREENWAY PLAZA, SUITE 110, HOUSTON, TX 77210						11. Pool name or Wildcat RED TANK; BONE SPRING, EAST				
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	O	18	22S	33E		340	SOUTH	1560	EAST	LEA
BH:	A	7	22S	33E		54	NORTH	549	EAST	LEA
13. Date Spudded 10/02/2022	14. Date T.D. Reached 12/24/2022		15. Date Rig Released 12/28/2022		16. Date Completed (Ready to Produce) 03/01/2023			17. Elevations (DF and RKB, RT, GR, etc.) 3633' GL		
18. Total Measured Depth of Well 21055'M/10675'V			19. Plug Back Measured Depth 21011'M/10680'V		20. Was Directional Survey Made? YES			21. Type Electric and Other Logs Run GR, CBL		
22. Producing Interval(s), of this completion - Top, Bottom, Name 10732'-20916' 2ND BONE SPRING										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
13-3/8"		54.5# J-55		964'		17-1/2"		1205SX -TOC 0		
9-5/8"		40# HCL-80		6640'		12-1/4"		1704SX - TOC 0		
5-1/2"		20# P-110		21035'		8-3/4" x 8-1/2"		2955SX-TOC~5419'		
24. LINER RECORD						25. TUBING RECORD				
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	SIZE	DEPTH SET		PACKER SET		
					2-3/8" TBG	10697'				
26. Perforation record (interval, size, and number) 10732'-20916', 0.42 HOLE SIZEM 1284 TOTAL SHOTS.						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						10732'-20916'		30627220LBS 100 MESH SAND		
								415427BBLS CLEAN FLUID		
28. PRODUCTION										
Date First Production 3/3/2023		Production Method (<i>Flowing, gas lift, pumping - Size and type pump</i>) LIFT				Well Status (<i>Prod. or Shut-in</i>) PROD				
Date of Test 3/14/23	Hours Tested 24 HOURS	Choke Size	Prod'n For Test Period	Oil - Bbl 1608	Gas - MCF 1606	Water - Bbl.		Gas - Oil Ratio		
Flow Tubing Press.	Casing Pressure 378	Calculated 24-Hour Rate	Oil - Bbl. 1608	Gas - MCF 1606	Water - Bbl. 4381		Oil Gravity - API - (<i>Corr.</i>)			
29. Disposition of Gas (<i>Sold, used for fuel, vented, etc.</i>) SOLD								30. Test Witnessed By		
31. List Attachments										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.								33. Rig Release Date:		
34. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Signature <i>Leslie T. Reeves</i>			Printed Name LESLIE REEVES			Title REGULATORY MANAGER			Date 7/14/23	
E-mail Address LESLIE_REEVES@oxy.com										

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 923'M	T. Bell Canyon	T. Ojo Alamo	T. Penn A"
T. Salado 1540'M	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 2749'M	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 4845'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 5791'M/5787'V	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 7006'M/6977'V	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Springs 8777'M/8709'V	T. Todilto	
T. Abo	T. 1 st Bone Springs 9963'M/9868'V	T. Entrada	
T. Wolfcamp	T. 2 nd Bone Springs 10571'M/10430'V	T. Wingate	
T. Penn	T. 3 rd Bone Springs	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

OIL OR GAS SANDS OR ZONES

No. 1, from.....to..... No. 3, from.....to.....
 No. 2, from.....to..... No. 4, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness In Feet	Lithology	From	To	Thickness In Feet	Lithology

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 241074

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 241074
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 241074

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 241074
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	None	7/20/2023