

District I
1625 N. French Dr., Hobbs, NM 88240

District II
811 S. First St., Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-104
Revised August 1, 2011

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date - NW- 04/02/2024
⁴ API Number 30-025-50306	⁵ Pool Name RED TANK; BONE SPRING	⁶ Pool Code 51683
⁷ Property Code: 332823	⁸ Property Name: LLAMA MALL 26-35 FEDERAL COM	⁹ Well Number: 23H

II. ¹⁰ Surface Location

Ul or lot no. D	Section 26	Township 22S	Range 32E	Lot Idn	Feet from the 270	North/South Line NORTH	Feet from the 1275	East/West line WEST	County LEA
--------------------	---------------	-----------------	--------------	---------	----------------------	---------------------------	-----------------------	------------------------	---------------

¹¹ Bottom Hole Location FTP: 278' FNL 2044' FWL LTP: 194' FSL 2015' FWL

UL or lot no. N	Section 35	Township 22S	Range 32E	Lot Idn	Feet from the 58	North/South line SOUTH	Feet from the 2014	East/West line WEST	County LEA
¹² Lse Code F	¹³ Producing Method Code : F	¹⁴ Gas Connection Date: 04/09/24	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
237722	CENTURION PIPELINE L.P.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 12/04/23	²² Ready Date 04/02/24	²³ TD 20847'M 10697'V	²⁴ PBTB 20807'M 10697'V	²⁵ Perforations 10579-20711'	²⁶ DHC, MC
²⁷ Hole Size	²⁸ Casing & Tubing Size	²⁹ Depth Set	³⁰ Sacks Cement		
17.5"	13.375"	982'	1215		
12.25"	9.625"	8785'	3460		
8.75" X 8.5"	5.5"	20832'	1807		

V. Well Test Data

³¹ Date New Oil 04/09/24	³² Gas Delivery Date 04/09/24	³³ Test Date 04/22/24	³⁴ Test Length 24 HRS	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 1110
³⁷ Choke Size 128	³⁸ Oil 4229	³⁹ Water 8049	⁴⁰ Gas 4713		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: 

Printed name:
JANA MENDIOLA

Title:
REGULATORY ADVISOR

E-mail Address:
Janalyn_mendiola@oxy.com

Date:
05/09/2024

Phone:
432-685-5936

OIL CONSERVATION DIVISION

Approved by:

PATRICIA MARTINEZ

Title:
PETROLEUM SPECIALIST

Approval Date:
5/29/2024


State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

AMENDED REPORT

¹ API Number 30-025-50306	² Pool Code 51683	³ Pool Name RED TANK; BONE SPRING
⁴ Property Code 332823	⁵ Property Name LLAMA MALL 26 35 FED COM	⁶ Well Number 23H
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁹ Elevation 3690'


UL or lot no. D	Section 26	Township 22S	Range 32E	Lot Idn	Feet from the 270	North/South line NORTH	Feet from the 1275	East/West line WEST	County LEA
--------------------	---------------	-----------------	--------------	---------	----------------------	---------------------------	-----------------------	------------------------	---------------

UL or lot no. N	Section 35	Township 22S	Range 32E	Lot Idn	Feet from the 58	North/South line SOUTH	Feet from the	East/West line WEST	County LEA
¹² Dedicated Acres 320.00		¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No.			

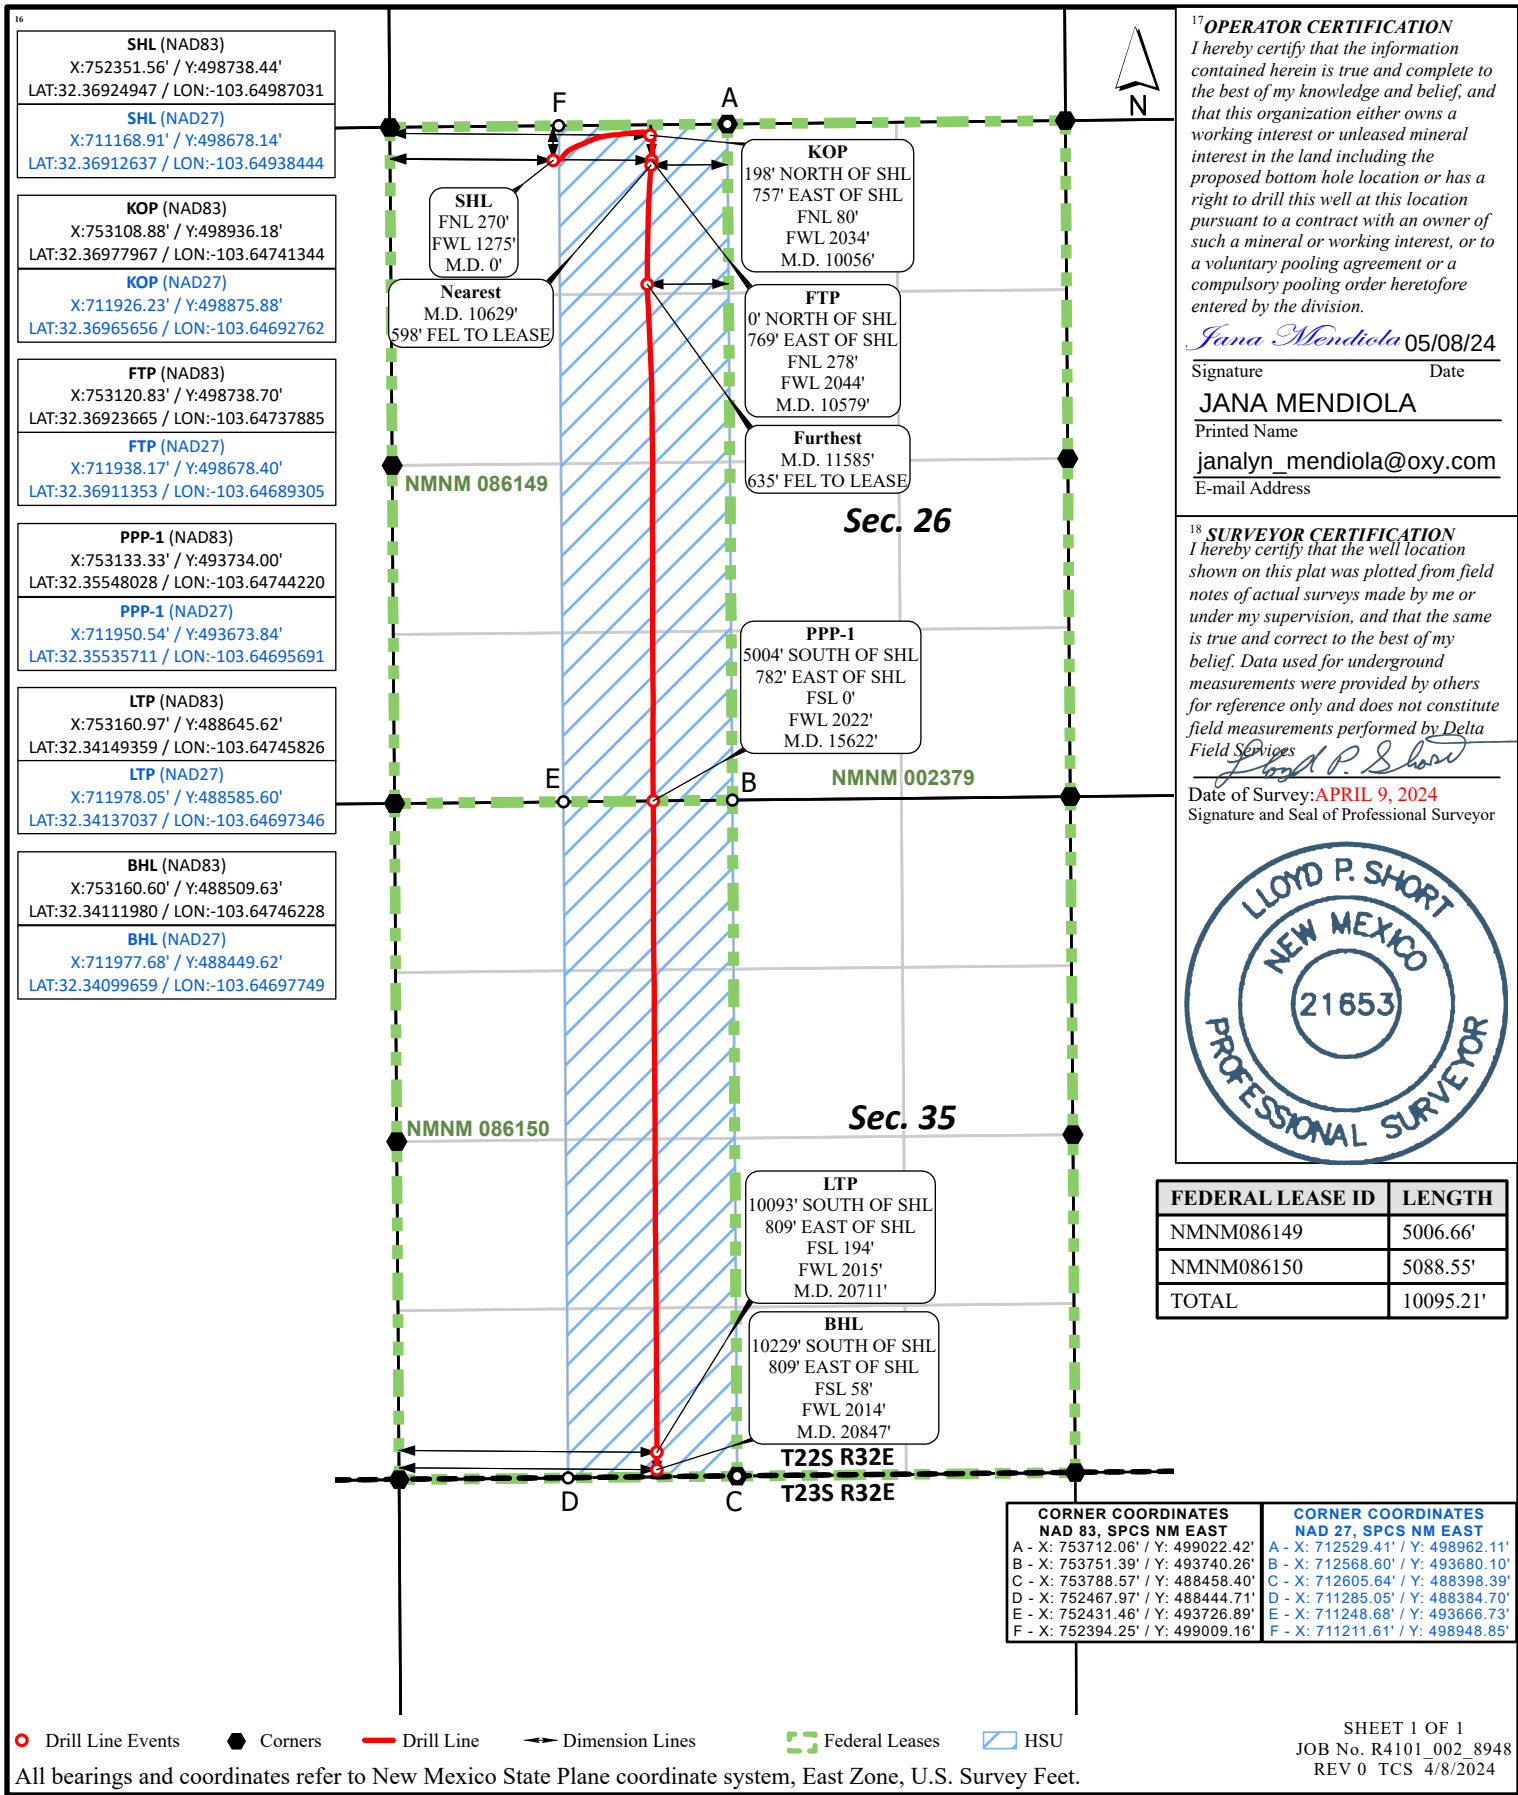




Project: Lea County, NM (NAD83-NME)
Site: Llama Mall 26-35
Well: Llama Mall 26-35 Fed Com 23H
Wellbore: OH / 73962
Design: Plan 5 02-13-24
Rig: H&P 419



PHOENIX
TECHNOLOGY SERVICES

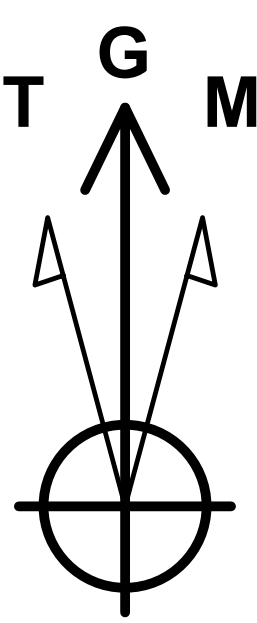

Azimuths to Grid North
True North: -0.37°
Magnetic North: 6.02°

Magnetic Field
Strength: 47611.3nT
Dip Angle: 59.94°
Date: 2/4/2024
Model: IFR

WELL DETAILS							
				Ground Level: 3690.00			
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude		
0.00	0.00	498738.44	752351.56	32° 22' 9.298104 N	103° 38' 59.533117 W		

SECTION DETAILS									
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect
1	8730.00	5.37	86.87	8663.35	219.64	693.45	0.00	0.000	-163.35
2	8800.00	5.04	85.83	8733.06	220.04	699.78	0.49	-164.562	-163.24
3	9808.00	0.00	0.00	9739.76	223.26	743.97	0.50	180.000	-162.91
4	10112.53	0.00	0.00	10044.29	223.26	743.97	0.00	0.000	-162.91
5	10562.53	45.00	177.97	10449.43	55.55	749.91	10.00	177.971	4.74
6	11008.78	89.60	179.61	10617.33	-345.73	757.42	10.00	2.328	405.33
7	20929.90	89.60	179.61	10686.41	-10266.38	825.58	0.00	0.000	10299.52
BHL - L M 26-35 F C 23H									
Annotation									
Plan Tie In									
Begin 0.50°/100' Drop									
Begin Vertical Hold									
KOP, Begin 10.00°/100' Build									
Begin 10.00°/100' Build & Turn									
LP, Hold 89.60° Inc at 179.61° Azm									
TD at 20929.90									

FORMATION TOP DETAILS									
TVDPath	MDPath	Formation							
932.00	932.00	RUSTLER							
1510.98	1510.99	SALADO							
3341.99	3342.58	CASTILE							
4776.95	4777.97	DELAWARE							
4840.93	4842.02	BELL CANYON							
5666.43	5676.43	CHERRY CANYON							
6968.89	7015.34	BRUSHY CANYON							
8600.86	8667.22	BONE SPRING							
9711.86	9780.10	BONE SPRING 1ST							
9996.86	10065.10	Second Bone Spring Limestone							
10401.74	10498.52	BONE SPRING 2ND							

Map System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone Name: New Mexico Eastern Zone







Local Origin: Well Llama Mall 26-35 Fed Com 23H, Grid North

Latitude: 32° 22' 9.298104 N
Longitude: 103° 38' 59.533117 W

Grid East: 752351.56
Grid North: 498738.44
Scale Factor: 1.000

Geomagnetic Model: IFR
Sample Date: 04-Feb-24
Magnetic Declination: 6.383°
Dip Angle from Horizontal: 59.943°
Magnetic Field Strength: 47611.30000000nT

To convert a Magnetic Direction to a Grid Direction, Add 6.017°
To convert a Magnetic Direction to a True Direction, Add 6.383° East
To convert a True Direction to a Grid Direction, Subtract 0.366°

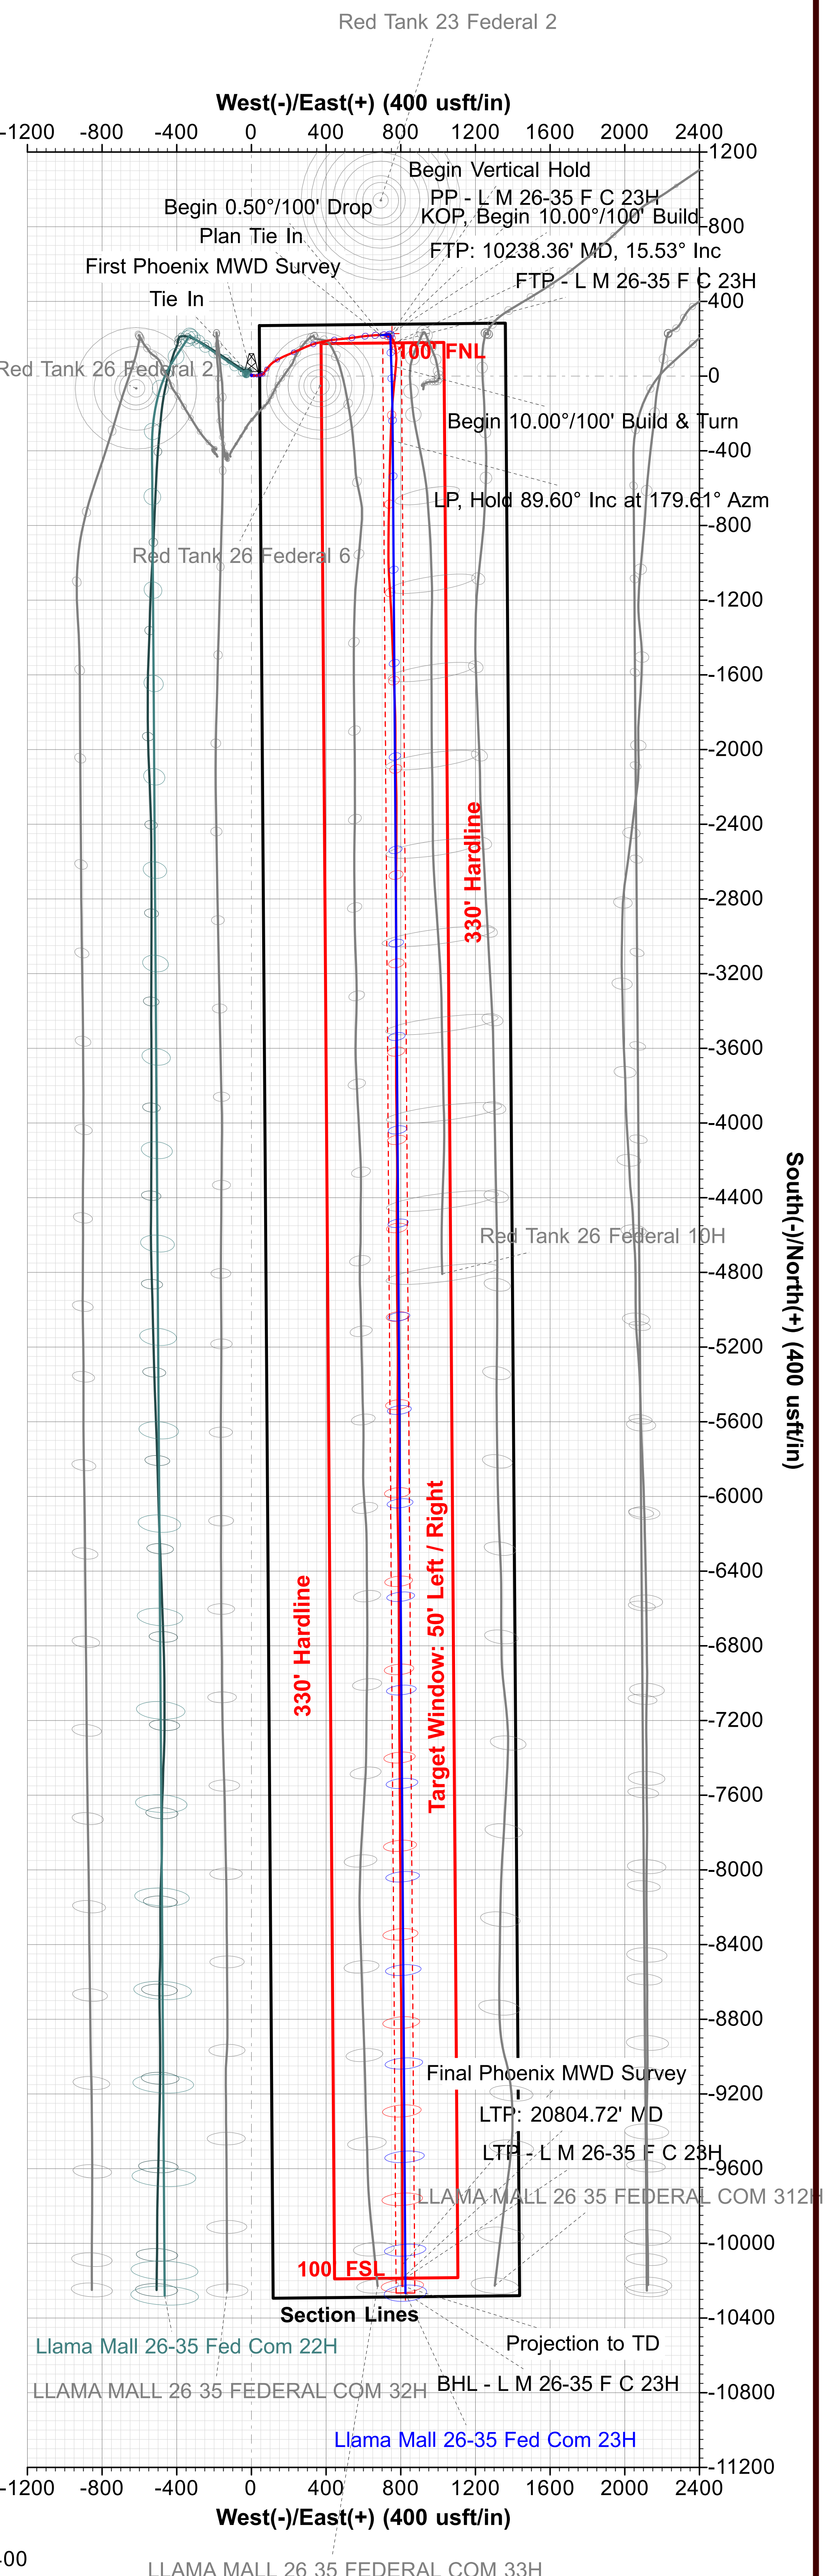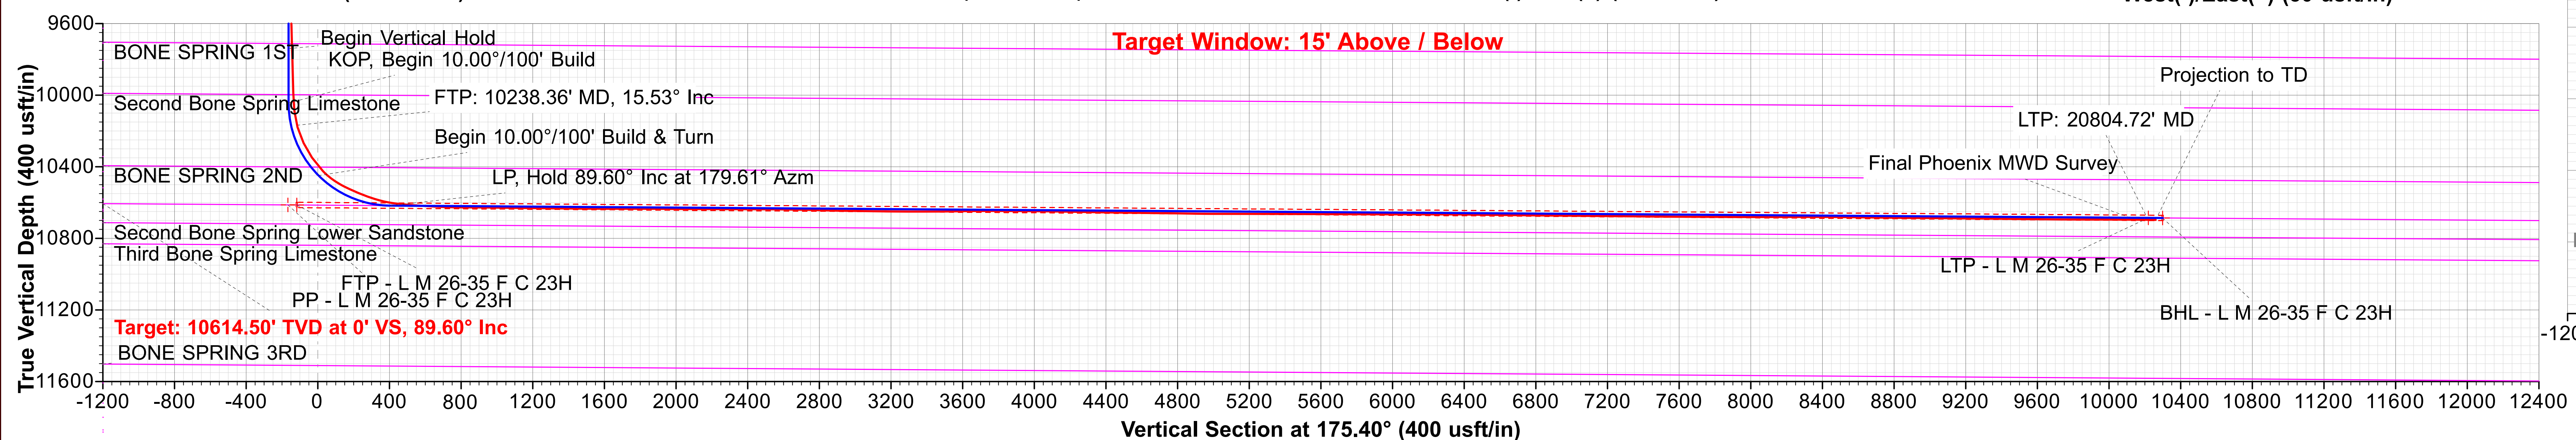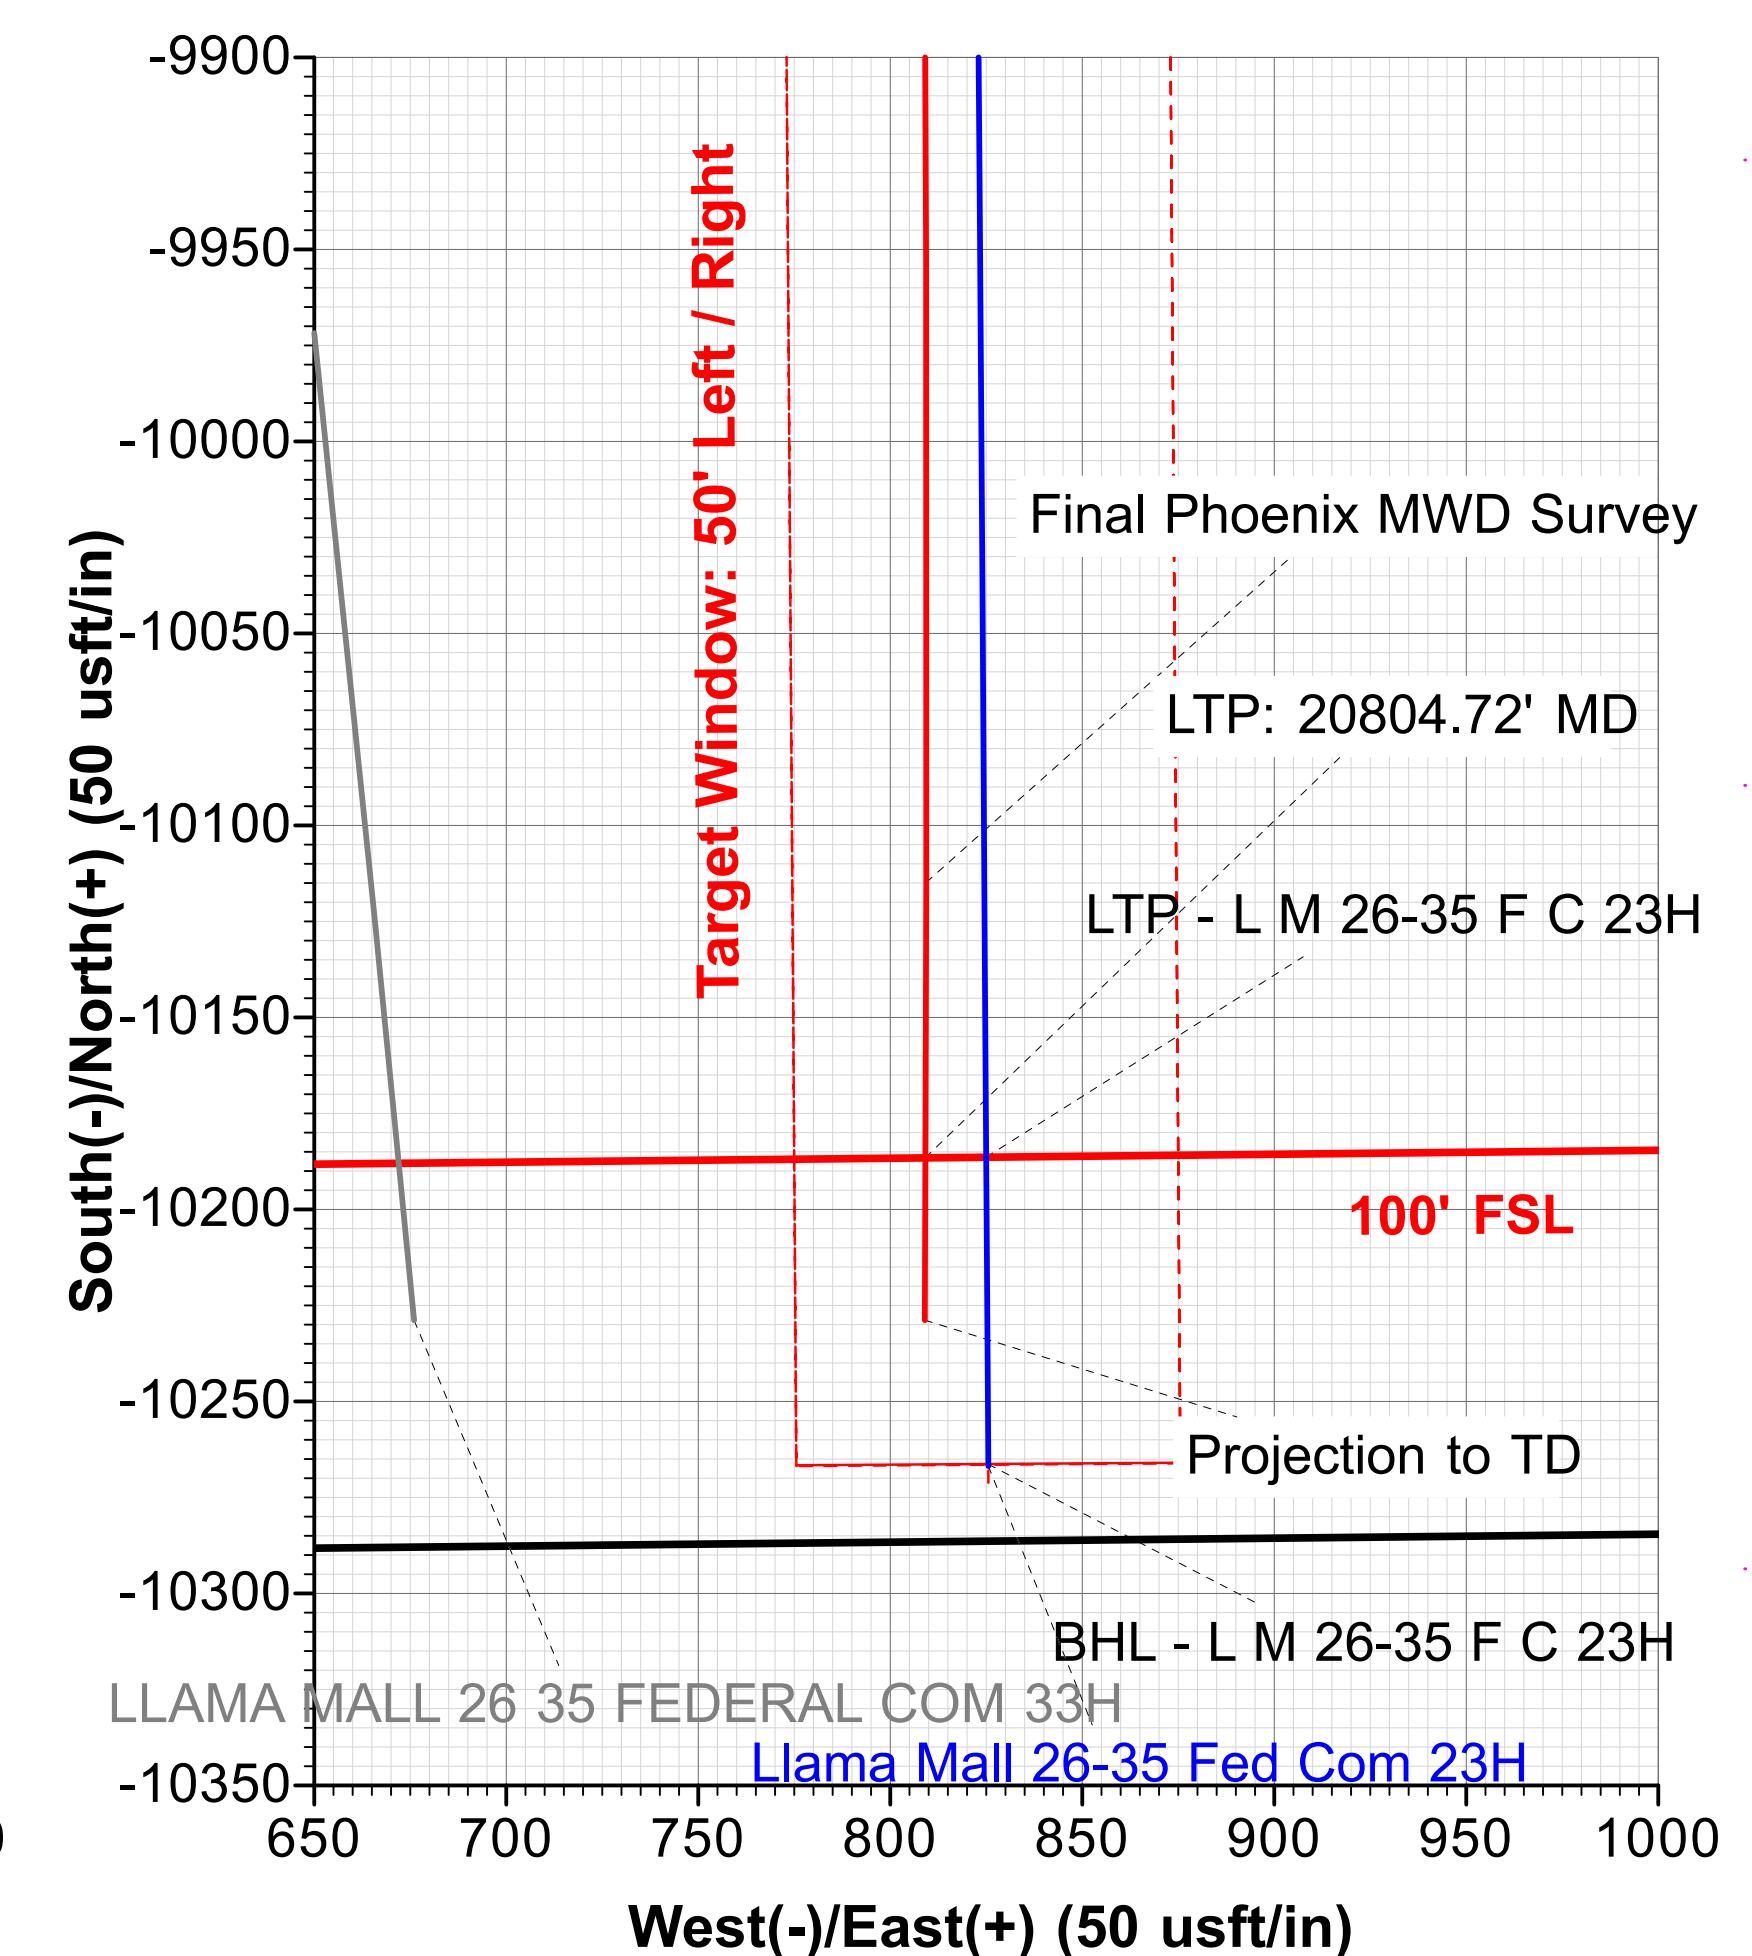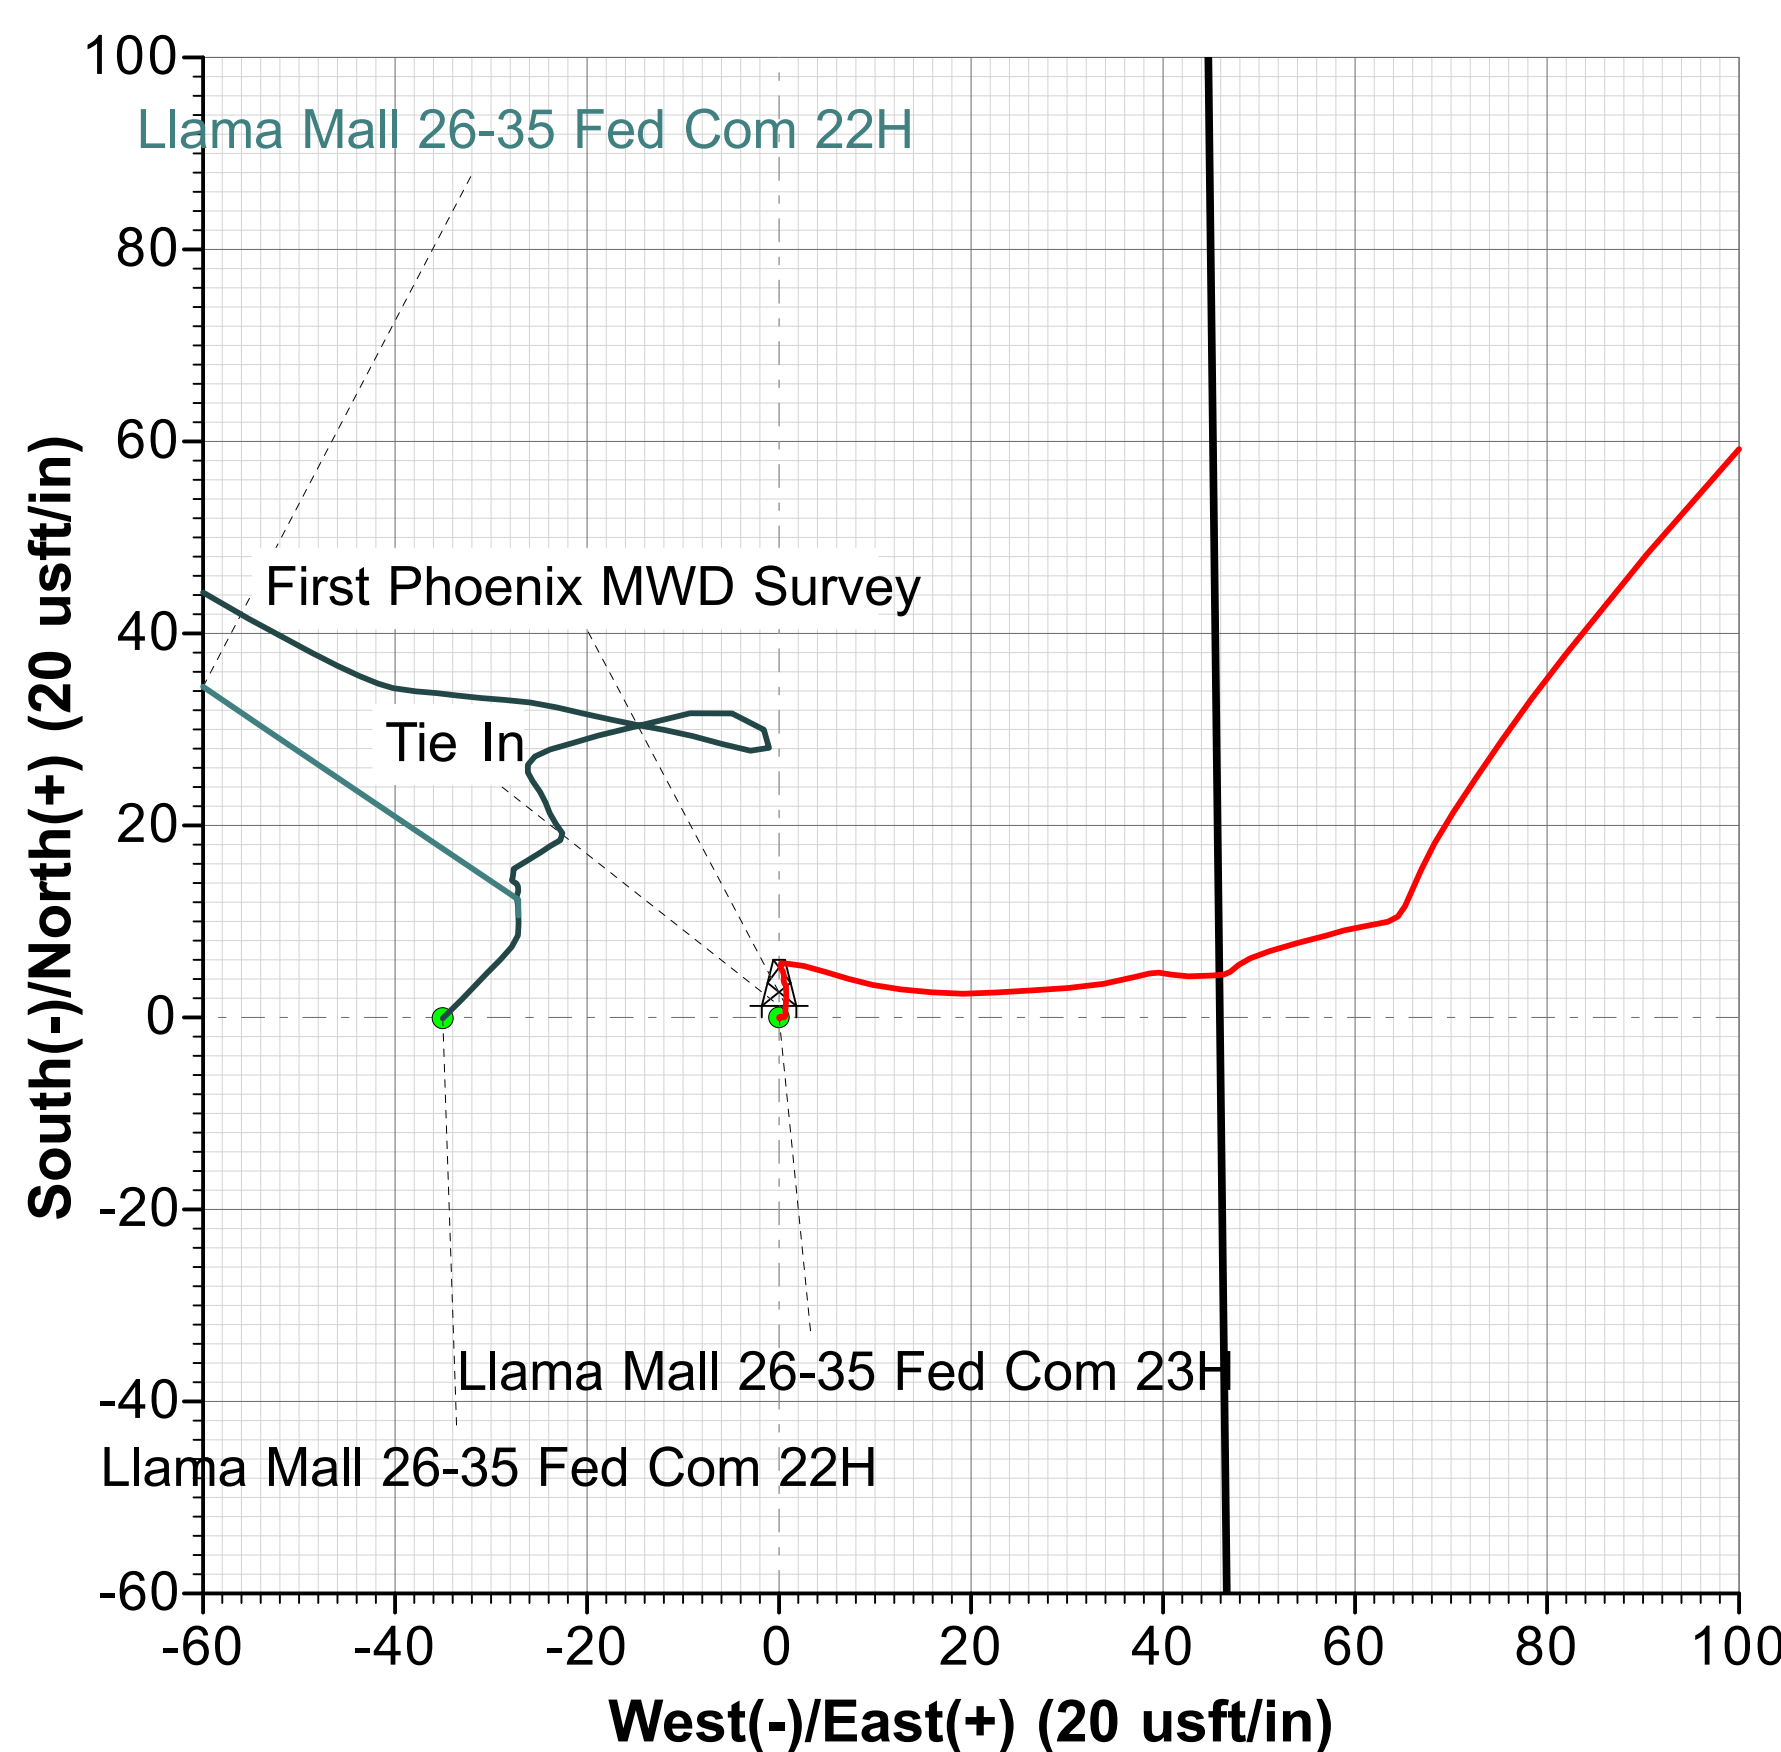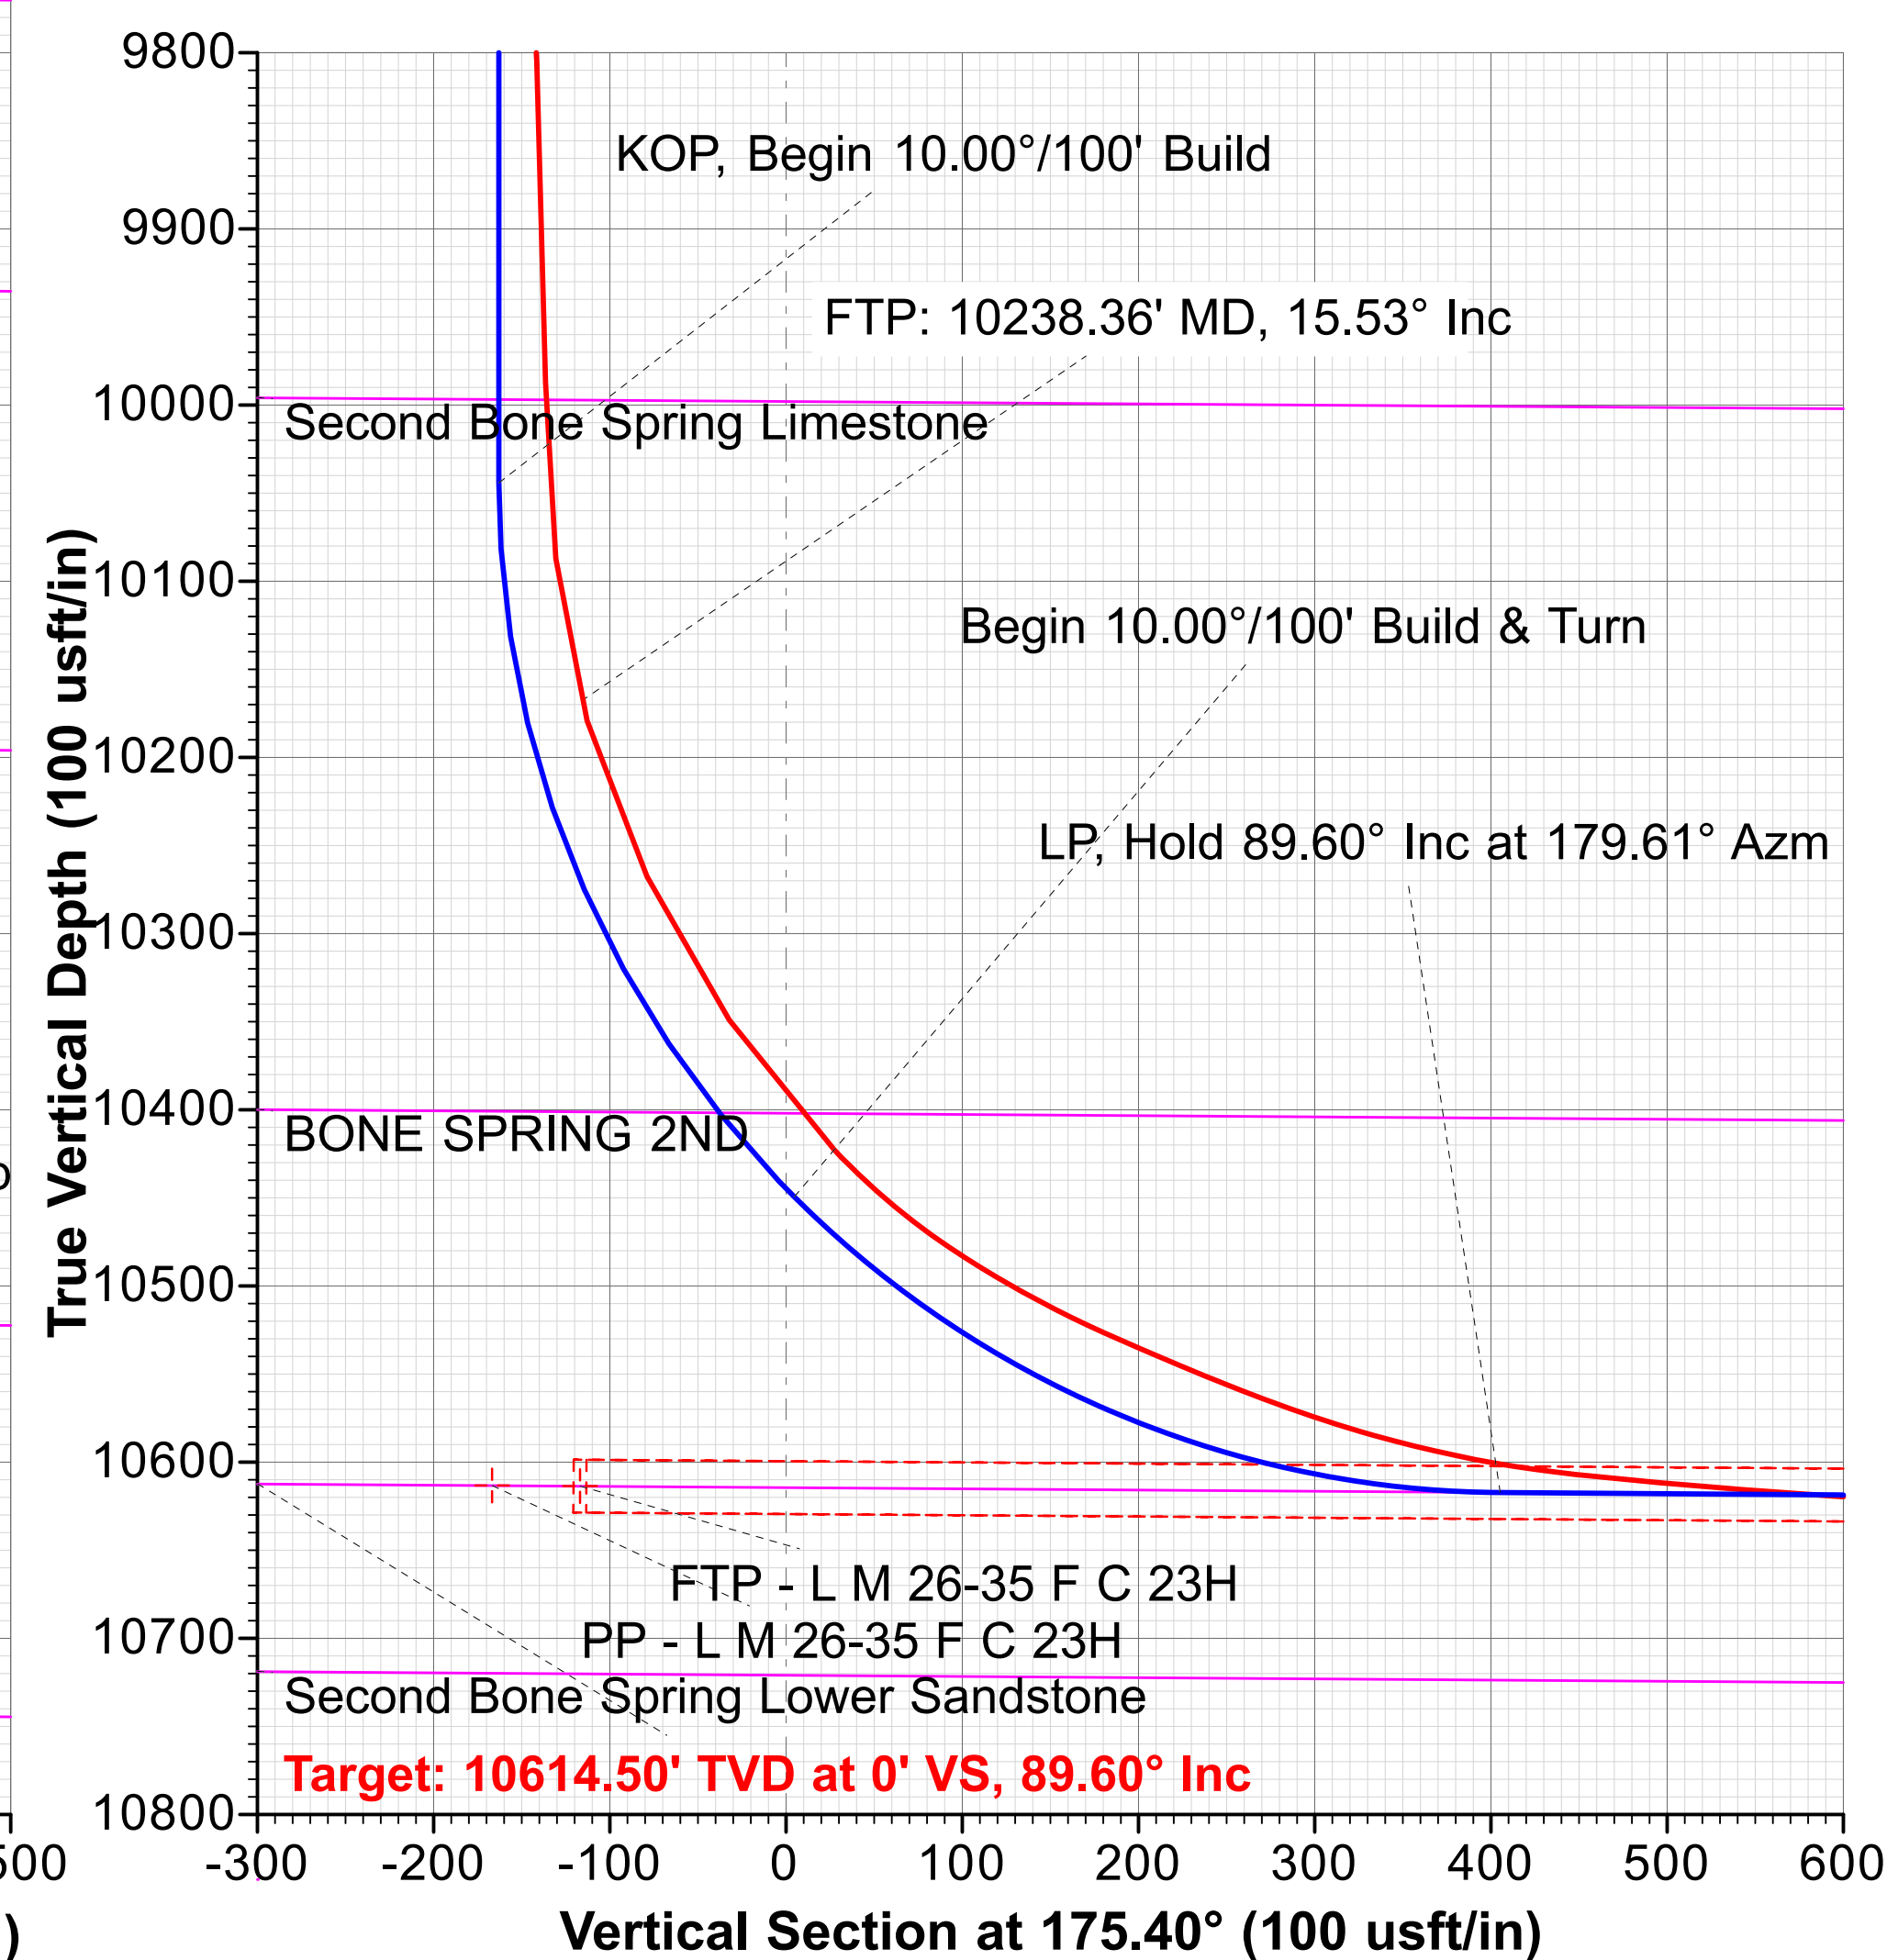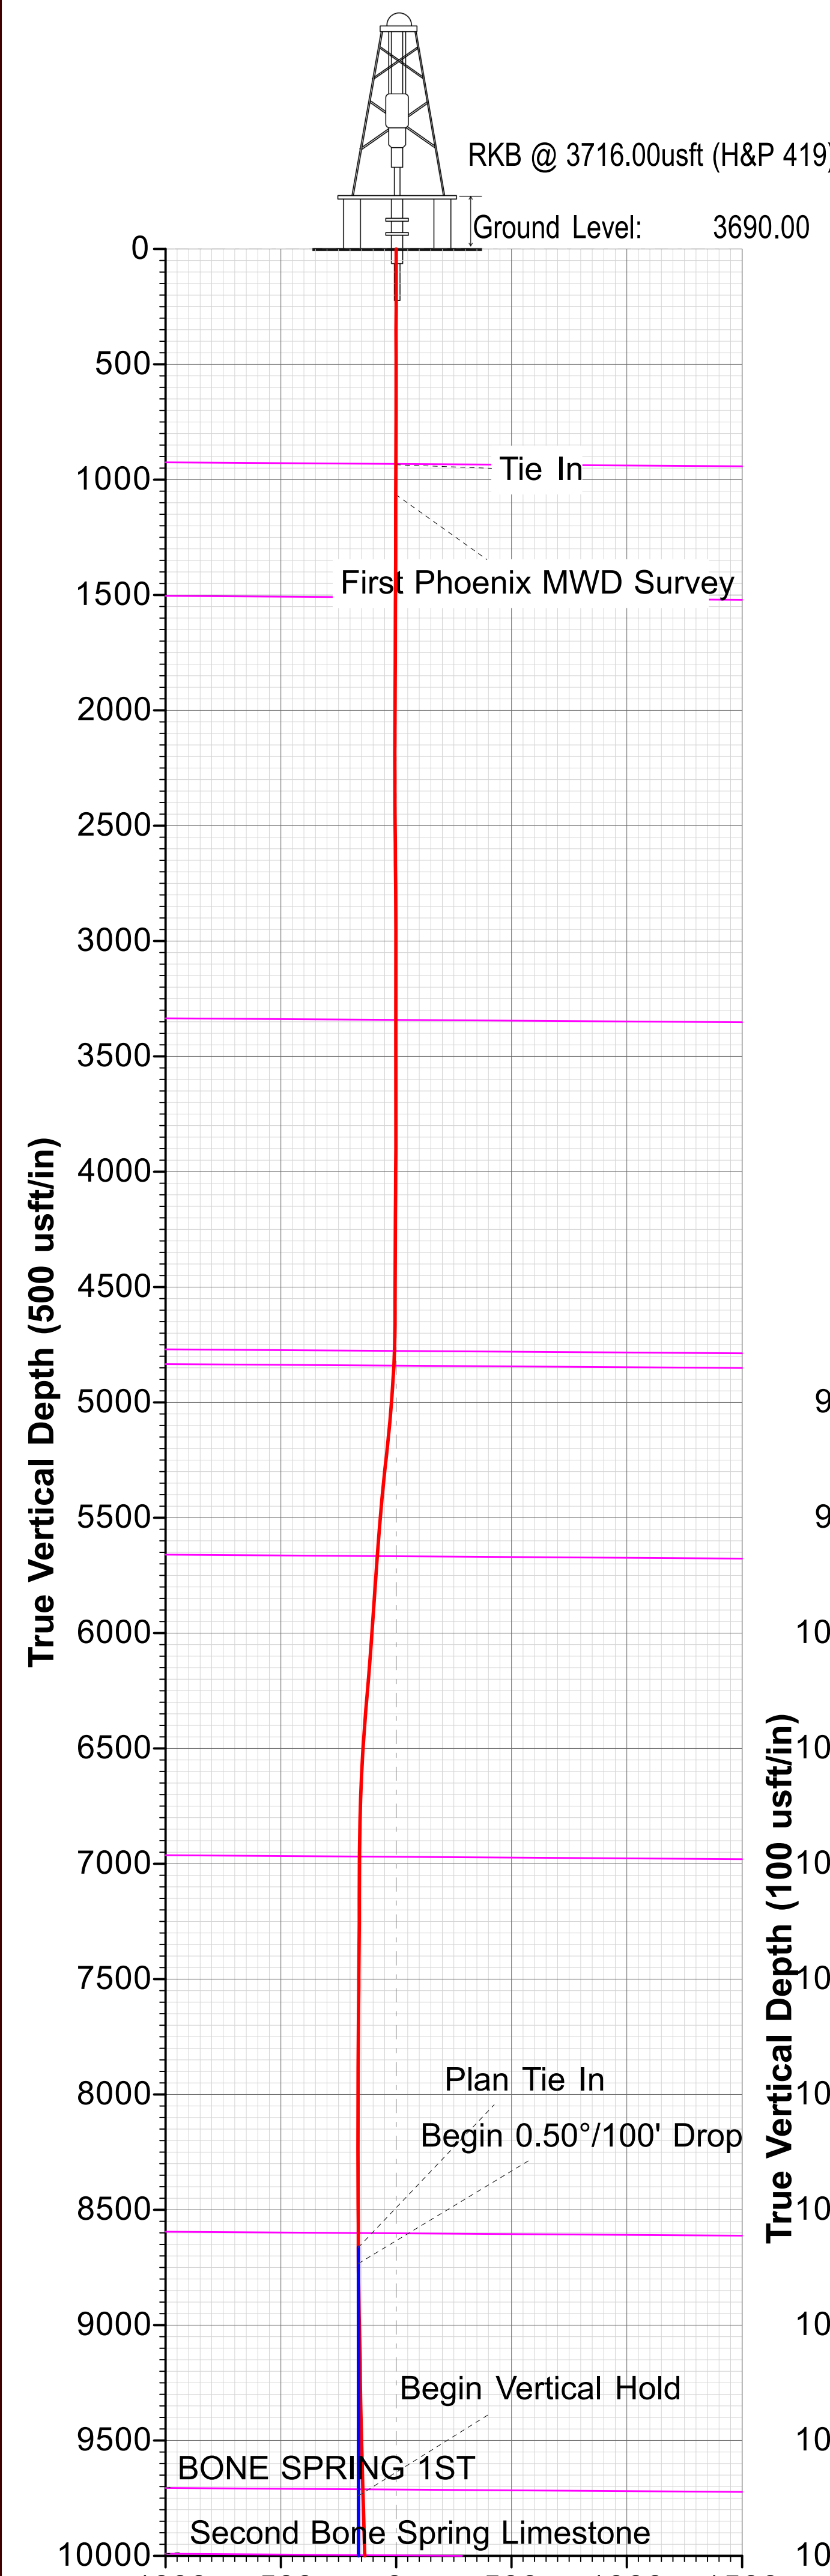



OXY USA INC.

**Lea County, NM (NAD83-NME)
Llama Mall 26-35
Llama Mall 26-35 Fed Com 23H**

OH / 73962

Design: Surveys (H&P 419)

Standard Survey Report

27 February, 2024





Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Llama Mall 26-35 Fed Com 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3716.00usft (H&P 419)
Site:	Llama Mall 26-35	MD Reference:	RKB @ 3716.00usft (H&P 419)
Well:	Llama Mall 26-35 Fed Com 23H	North Reference:	Grid
Wellbore:	OH / 73962	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 419)	Database:	USAEDMDB

Project	Lea County, NM (NAD83-NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Llama Mall 26-35		
Site Position:		Northing:	498,738.38 usft
From:	Map	Easting:	752,316.56 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 22' 9.299712 N
		Longitude:	103° 38' 59.941176 W

Well	Llama Mall 26-35 Fed Com 23H		
Well Position	+N/-S	0.00 usft	Northing: 498,738.44 usft
	+E/-W	0.00 usft	Easting: 752,351.56 usft
Position Uncertainty	2.00 usft	Wellhead Elevation:	usft
Grid Convergence:	0.366 °	Ground Level:	3,690.00 usft

Wellbore	OH / 73962				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IFR	2/4/2024	6.383	59.943	47,611.30000000

Design	Surveys (H&P 419)				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	175.40	

Survey Program	Date	2/27/2024			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
26.00	936.00	Surface Surveys - Adj (OH / 73962)	B004Mc_MWD+HRGM+S	MWD+HRGM+Sag	
1,065.00	20,847.00	Phoenix MWD Surveys - SQC R4 (OH / 73962)	SQC_C705Mb_MWD+IFF	MWD+IFR1+Sag+FDIR	

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
26.00	0.00	0.00	26.00	0.00	0.00	0.00	0.00	0.00	0.00	
171.00	0.10	152.13	171.00	-0.11	0.06	0.12	0.07	0.07	0.00	
259.00	0.12	22.87	259.00	-0.09	0.13	0.11	0.23	0.02	-146.89	
354.00	0.08	357.22	354.00	0.06	0.17	-0.05	0.06	-0.04	-27.00	
448.00	0.13	114.05	448.00	0.09	0.26	-0.06	0.19	0.05	124.29	
542.00	0.14	98.95	542.00	0.02	0.47	0.01	0.04	0.01	-16.06	
636.00	0.04	320.80	636.00	0.03	0.56	0.01	0.18	-0.11	-146.97	
730.00	0.14	55.26	730.00	0.12	0.64	-0.07	0.16	0.11	100.49	

Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Llama Mall 26-35 Fed Com 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3716.00usft (H&P 419)
Site:	Llama Mall 26-35	MD Reference:	RKB @ 3716.00usft (H&P 419)
Well:	Llama Mall 26-35 Fed Com 23H	North Reference:	Grid
Wellbore:	OH / 73962	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 419)	Database:	USAEDMDB

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
825.00	0.12	345.64	825.00	0.28	0.71	-0.23	0.16	-0.02	-73.28
919.00	0.31	356.65	919.00	0.63	0.67	-0.58	0.21	0.20	11.71
936.00	0.19	34.46	936.00	0.70	0.68	-0.65	1.16	-0.71	222.41
Tie In									
1,065.00	0.36	346.42	1,065.00	1.27	0.71	-1.21	0.21	0.13	-37.24
First Phoenix MWD Survey									
1,159.00	0.22	31.41	1,159.00	1.71	0.73	-1.65	0.27	-0.15	47.86
1,253.00	0.14	220.99	1,253.00	1.78	0.75	-1.72	0.38	-0.09	-181.30
1,346.00	0.28	22.72	1,346.00	1.91	0.76	-1.84	0.45	0.15	173.90
1,441.00	0.39	345.10	1,440.99	2.43	0.77	-2.36	0.25	0.12	-39.60
1,535.00	0.35	13.23	1,534.99	3.02	0.75	-2.95	0.20	-0.04	29.93
1,630.00	0.11	274.80	1,629.99	3.31	0.73	-3.24	0.40	-0.25	-103.61
1,724.00	0.37	342.14	1,723.99	3.61	0.55	-3.55	0.36	0.28	71.64
1,819.00	0.04	68.29	1,818.99	3.91	0.48	-3.86	0.39	-0.35	90.68
1,913.00	0.44	1.26	1,912.99	4.28	0.52	-4.23	0.45	0.43	-71.31
2,008.00	0.25	324.34	2,007.99	4.82	0.41	-4.77	0.30	-0.20	-38.86
2,103.00	0.08	327.20	2,102.99	5.04	0.25	-5.01	0.18	-0.18	3.01
2,197.00	0.40	343.76	2,196.99	5.41	0.13	-5.38	0.34	0.34	17.62
2,292.00	0.90	98.01	2,291.98	5.63	0.77	-5.55	1.18	0.53	120.26
2,387.00	1.37	99.18	2,386.96	5.34	2.63	-5.11	0.50	0.49	1.23
2,481.00	1.51	110.23	2,480.93	4.73	4.90	-4.33	0.33	0.15	11.76
2,576.00	1.45	103.11	2,575.90	4.03	7.25	-3.43	0.20	-0.06	-7.49
2,671.00	1.71	104.83	2,670.87	3.39	9.79	-2.60	0.28	0.27	1.81
2,766.00	1.91	93.64	2,765.82	2.93	12.74	-1.90	0.43	0.21	-11.78
2,861.00	1.98	96.82	2,860.76	2.63	15.95	-1.35	0.14	0.07	3.35
2,956.00	1.95	88.79	2,955.71	2.47	19.19	-0.93	0.29	-0.03	-8.45
3,050.00	2.27	86.83	3,049.64	2.61	22.65	-0.79	0.35	0.34	-2.09
3,145.00	2.21	86.68	3,144.57	2.82	26.36	-0.70	0.06	-0.06	-0.16
3,240.00	2.34	85.91	3,239.50	3.06	30.12	-0.64	0.14	0.14	-0.81
3,334.00	2.20	80.27	3,333.42	3.51	33.81	-0.78	0.28	-0.15	-6.00
3,429.00	2.01	74.61	3,428.36	4.26	37.22	-1.26	0.30	-0.20	-5.96
3,524.00	0.93	91.53	3,523.33	4.68	39.60	-1.49	1.21	-1.14	17.81
3,619.00	0.74	109.98	3,618.32	4.45	40.94	-1.15	0.34	-0.20	19.42
3,713.00	1.38	87.13	3,712.30	4.30	42.64	-0.87	0.80	0.68	-24.31
3,808.00	1.70	89.12	3,807.27	4.38	45.19	-0.74	0.34	0.34	2.09
3,902.00	0.66	50.49	3,901.25	4.74	47.01	-0.96	1.33	-1.11	-41.10
3,997.00	0.71	50.70	3,996.24	5.46	47.88	-1.61	0.05	0.05	0.22
4,092.00	1.01	65.98	4,091.23	6.18	49.10	-2.22	0.39	0.32	16.08
4,186.00	1.66	71.80	4,185.20	6.94	51.15	-2.82	0.71	0.69	6.19
4,280.00	2.05	75.80	4,279.15	7.78	54.08	-3.42	0.44	0.41	4.26
4,375.00	1.48	74.65	4,374.11	8.52	56.91	-3.93	0.60	-0.60	-1.21
4,470.00	0.98	74.36	4,469.09	9.06	58.87	-4.31	0.53	-0.53	-0.31
4,564.00	1.60	80.50	4,563.06	9.50	60.94	-4.58	0.67	0.66	6.53



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Llama Mall 26-35 Fed Com 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3716.00usft (H&P 419)
Site:	Llama Mall 26-35	MD Reference:	RKB @ 3716.00usft (H&P 419)
Well:	Llama Mall 26-35 Fed Com 23H	North Reference:	Grid
Wellbore:	OH / 73962	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 419)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,658.00	1.48	77.78	4,657.03	9.97	63.42	-4.85	0.15	-0.13	-2.89
4,753.00	1.78	23.34	4,751.99	11.58	65.21	-6.32	1.59	0.32	-57.31
4,848.00	3.27	24.17	4,846.90	15.41	66.90	-10.00	1.57	1.57	0.87
4,943.00	5.00	32.85	4,941.65	21.36	70.26	-15.66	1.93	1.82	9.14
5,037.00	6.07	34.75	5,035.21	28.89	75.31	-22.76	1.15	1.14	2.02
5,131.00	7.61	38.25	5,128.54	37.86	82.00	-31.16	1.70	1.64	3.72
5,226.00	8.58	39.63	5,222.59	48.26	90.41	-40.85	1.04	1.02	1.45
5,321.00	9.07	42.69	5,316.47	59.22	100.01	-51.01	0.71	0.52	3.22
5,415.00	9.76	51.14	5,409.20	69.66	111.24	-60.52	1.64	0.73	8.99
5,510.00	10.21	59.28	5,502.77	79.02	124.75	-68.76	1.56	0.47	8.57
5,604.00	10.53	61.60	5,595.23	87.36	139.46	-75.90	0.56	0.34	2.47
5,699.00	10.76	61.55	5,688.60	95.71	154.90	-82.99	0.24	0.24	-0.05
5,793.00	11.31	64.64	5,780.86	103.84	170.94	-89.80	0.86	0.59	3.29
5,888.00	12.14	67.39	5,873.88	111.67	188.58	-96.20	1.05	0.87	2.89
5,982.00	12.54	67.03	5,965.71	119.45	207.10	-102.47	0.43	0.43	-0.38
6,077.00	13.26	67.54	6,058.31	127.64	226.67	-109.06	0.77	0.76	0.54
6,172.00	13.95	67.27	6,150.64	136.23	247.30	-115.97	0.73	0.73	-0.28
6,266.00	14.26	65.89	6,241.81	145.33	268.32	-123.36	0.49	0.33	-1.47
6,360.00	14.19	64.99	6,332.93	154.93	289.32	-131.24	0.25	-0.07	-0.96
6,507.00	14.06	71.69	6,475.49	168.16	322.61	-141.76	1.12	-0.09	4.56
6,549.00	14.07	73.54	6,516.23	171.21	332.35	-144.02	1.07	0.02	4.40
6,644.00	14.54	74.21	6,608.29	177.73	354.89	-148.71	0.52	0.49	0.71
6,739.00	14.28	77.82	6,700.30	183.45	377.82	-152.57	0.98	-0.27	3.80
6,833.00	14.83	77.43	6,791.28	188.51	400.90	-155.77	0.59	0.59	-0.41
6,928.00	12.71	82.31	6,883.55	192.55	423.12	-158.02	2.54	-2.23	5.14
7,023.00	12.18	84.56	6,976.32	194.90	443.46	-158.73	0.76	-0.56	2.37
7,117.00	11.93	84.25	7,068.25	196.82	463.00	-159.07	0.27	-0.27	-0.33
7,212.00	11.85	85.45	7,161.21	198.57	482.49	-159.26	0.27	-0.08	1.26
7,306.00	11.72	83.64	7,253.23	200.40	501.60	-159.55	0.42	-0.14	-1.93
7,401.00	11.47	81.59	7,346.29	202.85	520.53	-160.47	0.51	-0.26	-2.16
7,496.00	10.96	83.71	7,439.47	205.22	538.85	-161.37	0.69	-0.54	2.23
7,591.00	9.28	82.74	7,532.99	207.18	555.43	-161.99	1.78	-1.77	-1.02
7,685.00	9.15	81.82	7,625.78	209.20	570.34	-162.81	0.21	-0.14	-0.98
7,780.00	8.73	82.36	7,719.63	211.23	584.97	-163.66	0.45	-0.44	0.57
7,875.00	7.18	83.64	7,813.71	212.85	598.01	-164.23	1.64	-1.63	1.35
7,969.00	7.07	83.97	7,906.98	214.11	609.60	-164.55	0.12	-0.12	0.35
8,064.00	6.88	83.85	8,001.28	215.33	621.08	-164.85	0.20	-0.20	-0.13
8,159.00	6.70	84.75	8,095.61	216.45	632.25	-165.07	0.22	-0.19	0.95
8,253.00	6.59	85.14	8,188.98	217.40	643.09	-165.16	0.13	-0.12	0.41
8,348.00	6.40	86.09	8,283.37	218.23	653.80	-165.12	0.23	-0.20	1.00
8,443.00	6.22	86.87	8,377.80	218.87	664.22	-164.92	0.21	-0.19	0.82
8,538.00	6.16	88.54	8,472.24	219.28	674.46	-164.51	0.20	-0.06	1.76
8,632.00	5.84	88.33	8,565.73	219.55	684.28	-163.99	0.34	-0.34	-0.22
8,730.00	5.38	86.86	8,663.26	219.95	693.85	-163.62	0.49	-0.47	-1.50



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Llama Mall 26-35 Fed Com 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3716.00usft (H&P 419)
Site:	Llama Mall 26-35	MD Reference:	RKB @ 3716.00usft (H&P 419)
Well:	Llama Mall 26-35 Fed Com 23H	North Reference:	Grid
Wellbore:	OH / 73962	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 419)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,833.00	4.29	91.89	8,765.89	220.08	702.52	-163.06	1.13	-1.06	4.88
8,928.00	3.68	101.20	8,860.66	219.37	709.06	-161.83	0.93	-0.64	9.80
9,023.00	2.90	108.46	8,955.50	218.02	714.33	-160.06	0.93	-0.82	7.64
9,117.00	2.75	114.53	9,049.39	216.33	718.64	-158.03	0.36	-0.16	6.46
9,212.00	2.83	103.46	9,144.28	214.84	722.99	-156.19	0.57	0.08	-11.65
9,306.00	2.75	96.77	9,238.17	214.03	727.49	-155.03	0.36	-0.09	-7.12
9,400.00	2.61	105.16	9,332.07	213.21	731.80	-153.86	0.44	-0.15	8.93
9,495.00	2.98	116.72	9,426.95	211.53	736.09	-151.85	0.71	0.39	12.17
9,590.00	2.96	117.09	9,521.83	209.30	740.48	-149.28	0.03	-0.02	0.39
9,685.00	2.44	125.36	9,616.72	207.02	744.31	-146.69	0.68	-0.55	8.71
9,779.00	2.38	127.34	9,710.64	204.68	747.50	-144.10	0.11	-0.06	2.11
9,873.00	2.58	124.41	9,804.55	202.30	750.79	-141.46	0.25	0.21	-3.12
9,967.00	2.53	123.99	9,898.46	199.94	754.26	-138.84	0.06	-0.05	-0.45
10,056.00	2.33	127.41	9,987.38	197.74	757.32	-136.40	0.28	-0.22	3.84
10,156.00	5.41	156.96	10,087.14	192.17	760.78	-130.57	3.57	3.08	29.55
10,238.36	15.53	163.96	10,168.03	177.96	765.36	-116.04	12.37	12.29	8.50
FTP: 10238.36° MD, 15.53° Inc									
10,250.00	16.97	164.28	10,179.20	174.83	766.25	-112.84	12.37	12.34	2.75
10,345.00	25.44	169.01	10,267.70	141.39	773.91	-78.90	9.09	8.92	4.98
10,439.00	34.68	181.70	10,349.05	94.69	776.98	-32.10	11.88	9.83	13.50
10,534.00	43.81	185.92	10,422.56	34.83	772.78	27.23	10.01	9.61	4.44
10,629.00	57.64	185.71	10,482.55	-38.16	765.36	99.38	14.56	14.56	-0.22
10,723.00	66.13	184.90	10,526.81	-120.64	757.72	180.98	9.06	9.03	-0.86
10,818.00	69.11	183.39	10,562.97	-208.24	751.39	267.80	3.46	3.14	-1.59
10,912.00	76.20	181.81	10,590.98	-297.81	747.34	356.76	7.71	7.54	-1.68
11,006.00	84.02	181.89	10,607.11	-390.30	744.35	448.70	8.32	8.32	0.09
11,101.00	85.65	181.16	10,615.67	-484.87	741.84	542.78	1.88	1.72	-0.77
11,209.00	86.86	181.07	10,622.72	-592.62	739.74	650.01	1.12	1.12	-0.08
11,302.00	88.66	181.19	10,626.36	-685.53	737.91	742.47	1.94	1.94	0.13
11,396.00	90.07	181.23	10,627.40	-779.50	735.92	835.98	1.50	1.50	0.04
11,491.00	89.31	180.43	10,627.91	-874.48	734.55	930.55	1.16	-0.80	-0.84
11,585.00	89.24	179.80	10,629.10	-968.48	734.36	1,024.22	0.67	-0.07	-0.67
11,680.00	89.38	176.82	10,630.24	-1,063.42	737.16	1,119.08	3.14	0.15	-3.14
11,775.00	89.33	176.11	10,631.31	-1,158.23	743.02	1,214.06	0.75	-0.05	-0.75
11,869.00	89.28	177.32	10,632.45	-1,252.07	748.40	1,308.03	1.29	-0.05	1.29
11,964.00	89.38	177.87	10,633.57	-1,346.98	752.39	1,402.95	0.59	0.11	0.58
12,059.00	89.55	177.57	10,634.45	-1,441.90	756.17	1,497.87	0.36	0.18	-0.32
12,153.00	90.00	177.69	10,634.82	-1,535.82	760.06	1,591.80	0.50	0.48	0.13
12,248.00	89.99	177.71	10,634.83	-1,630.74	763.87	1,686.72	0.02	-0.01	0.02
12,342.00	89.82	177.80	10,634.99	-1,724.67	767.55	1,780.64	0.20	-0.18	0.10
12,437.00	89.87	178.48	10,635.24	-1,819.62	770.63	1,875.53	0.72	0.05	0.72
12,532.00	89.66	180.29	10,635.63	-1,914.61	771.65	1,970.30	1.92	-0.22	1.91
12,627.00	89.66	179.34	10,636.20	-2,009.60	771.96	2,065.01	1.00	0.00	-1.00



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Llama Mall 26-35 Fed Com 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3716.00usft (H&P 419)
Site:	Llama Mall 26-35	MD Reference:	RKB @ 3716.00usft (H&P 419)
Well:	Llama Mall 26-35 Fed Com 23H	North Reference:	Grid
Wellbore:	OH / 73962	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 419)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,721.00	89.88	178.66	10,636.57	-2,103.59	773.60	2,158.83	0.76	0.23	-0.72
12,816.00	89.66	178.69	10,636.95	-2,198.56	775.80	2,253.67	0.23	-0.23	0.03
12,910.00	89.99	180.02	10,637.24	-2,292.55	776.86	2,347.45	1.46	0.35	1.41
13,100.00	89.59	180.22	10,637.94	-2,482.55	776.46	2,536.80	0.24	-0.21	0.11
13,194.00	88.88	180.30	10,639.19	-2,576.54	776.03	2,630.45	0.76	-0.76	0.09
13,289.00	88.89	180.92	10,641.04	-2,671.52	775.02	2,725.04	0.65	0.01	0.65
13,384.00	88.26	179.73	10,643.40	-2,766.48	774.48	2,819.66	1.42	-0.66	-1.25
13,478.00	88.58	179.32	10,646.00	-2,860.44	775.26	2,913.38	0.55	0.34	-0.44
13,573.00	89.50	180.10	10,647.59	-2,955.43	775.74	3,008.10	1.27	0.97	0.82
13,667.00	89.26	179.74	10,648.61	-3,049.42	775.87	3,101.80	0.46	-0.26	-0.38
13,762.00	89.30	179.43	10,649.80	-3,144.41	776.56	3,196.54	0.33	0.04	-0.33
13,856.00	89.80	180.04	10,650.54	-3,238.41	776.99	3,290.27	0.84	0.53	0.65
13,951.00	90.09	180.05	10,650.63	-3,333.41	776.92	3,384.96	0.31	0.31	0.01
14,046.00	90.52	179.98	10,650.12	-3,428.40	776.89	3,479.65	0.46	0.45	-0.07
14,140.00	90.81	180.52	10,649.03	-3,522.40	776.48	3,573.30	0.65	0.31	0.57
14,235.00	90.88	180.14	10,647.63	-3,617.38	775.94	3,667.94	0.41	0.07	-0.40
14,329.00	90.07	180.00	10,646.85	-3,711.38	775.82	3,761.63	0.87	-0.86	-0.15
14,424.00	89.30	179.87	10,647.37	-3,806.38	775.93	3,856.33	0.82	-0.81	-0.14
14,518.00	89.46	178.81	10,648.39	-3,900.37	777.01	3,950.10	1.14	0.17	-1.13
14,613.00	89.62	179.91	10,649.15	-3,995.35	778.07	4,044.87	1.17	0.17	1.16
14,708.00	88.91	178.81	10,650.37	-4,090.34	779.14	4,139.63	1.38	-0.75	-1.16
14,802.00	89.17	179.32	10,651.95	-4,184.31	780.67	4,233.42	0.61	0.28	0.54
14,897.00	88.80	180.31	10,653.63	-4,279.30	780.98	4,328.13	1.11	-0.39	1.04
14,991.00	88.85	180.90	10,655.56	-4,373.27	779.98	4,421.72	0.63	0.05	0.63
15,086.00	89.24	179.78	10,657.14	-4,468.25	779.42	4,516.35	1.25	0.41	-1.18
15,180.00	89.26	180.23	10,658.37	-4,562.25	779.41	4,610.04	0.48	0.02	0.48
15,275.00	89.44	180.23	10,659.45	-4,657.24	779.03	4,704.70	0.19	0.19	0.00
15,369.00	89.12	179.50	10,660.63	-4,751.23	779.25	4,798.40	0.85	-0.34	-0.78
15,464.00	88.87	179.53	10,662.30	-4,846.21	780.06	4,893.15	0.27	-0.26	0.03
15,559.00	89.97	179.34	10,663.26	-4,941.20	780.99	4,987.90	1.18	1.16	-0.20
15,654.00	89.66	179.24	10,663.57	-5,036.19	782.17	5,082.68	0.34	-0.33	-0.11
15,748.00	90.13	179.53	10,663.74	-5,130.19	783.18	5,176.46	0.59	0.50	0.31
15,843.00	89.94	179.44	10,663.68	-5,225.18	784.03	5,271.22	0.22	-0.20	-0.09
15,937.00	89.92	180.20	10,663.79	-5,319.18	784.33	5,364.94	0.81	-0.02	0.81
16,032.00	89.85	180.64	10,663.99	-5,414.18	783.63	5,459.57	0.47	-0.07	0.46
16,126.00	89.67	179.87	10,664.38	-5,508.18	783.21	5,553.23	0.84	-0.19	-0.82
16,220.00	89.81	179.68	10,664.81	-5,602.18	783.58	5,646.96	0.25	0.15	-0.20
16,315.00	89.71	180.14	10,665.20	-5,697.17	783.73	5,741.66	0.50	-0.11	0.48
16,409.00	89.93	180.11	10,665.50	-5,791.17	783.53	5,835.34	0.24	0.23	-0.03
16,504.00	89.73	180.71	10,665.78	-5,886.17	782.85	5,929.98	0.67	-0.21	0.63
16,598.00	89.64	179.94	10,666.30	-5,980.17	782.31	6,023.63	0.82	-0.10	-0.82
16,693.00	90.29	179.12	10,666.36	-6,075.16	783.09	6,118.38	1.10	0.68	-0.86
16,788.00	89.82	178.75	10,666.26	-6,170.14	784.86	6,213.20	0.63	-0.49	-0.39
16,882.00	90.26	179.00	10,666.20	-6,264.13	786.70	6,307.03	0.54	0.47	0.27



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Llama Mall 26-35 Fed Com 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3716.00usft (H&P 419)
Site:	Llama Mall 26-35	MD Reference:	RKB @ 3716.00usft (H&P 419)
Well:	Llama Mall 26-35 Fed Com 23H	North Reference:	Grid
Wellbore:	OH / 73962	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 419)	Database:	USAEDMDB

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
16,977.00	88.75	179.11	10,667.02	-6,359.11	788.27	6,401.83	1.59	-1.59	0.12
17,072.00	89.33	180.00	10,668.61	-6,454.09	789.01	6,496.57	1.12	0.61	0.94
17,166.00	89.47	180.03	10,669.60	-6,548.08	788.98	6,590.26	0.15	0.15	0.03
17,261.00	89.43	179.09	10,670.51	-6,643.08	789.71	6,685.00	0.99	-0.04	-0.99
17,356.00	89.51	180.21	10,671.39	-6,738.07	790.29	6,779.74	1.18	0.08	1.18
17,450.00	89.38	179.62	10,672.30	-6,832.06	790.43	6,873.44	0.64	-0.14	-0.63
17,544.00	89.41	179.57	10,673.29	-6,926.06	791.10	6,967.18	0.06	0.03	-0.05
17,639.00	89.36	179.47	10,674.31	-7,021.05	791.89	7,061.93	0.12	-0.05	-0.11
17,733.00	89.32	180.08	10,675.39	-7,115.04	792.26	7,155.65	0.65	-0.04	0.65
17,828.00	89.20	179.83	10,676.62	-7,210.03	792.34	7,250.34	0.29	-0.13	-0.26
17,922.00	89.38	179.73	10,677.78	-7,304.02	792.70	7,344.06	0.22	0.19	-0.11
18,016.00	89.41	178.97	10,678.78	-7,398.01	793.76	7,437.83	0.81	0.03	-0.81
18,111.00	89.86	179.97	10,679.38	-7,493.00	794.64	7,532.59	1.15	0.47	1.05
18,206.00	89.95	179.39	10,679.54	-7,588.00	795.17	7,627.33	0.62	0.09	-0.61
18,300.00	89.80	179.42	10,679.74	-7,682.00	796.15	7,721.10	0.16	-0.16	0.03
18,394.00	89.76	180.05	10,680.10	-7,776.00	796.58	7,814.83	0.67	-0.04	0.67
18,489.00	89.74	180.25	10,680.52	-7,870.99	796.34	7,909.50	0.21	-0.02	0.21
18,583.00	89.86	178.55	10,680.85	-7,964.98	797.32	8,003.27	1.81	0.13	-1.81
18,678.00	90.15	180.06	10,680.84	-8,059.97	798.47	8,098.04	1.62	0.31	1.59
18,773.00	90.26	179.90	10,680.50	-8,154.97	798.51	8,192.74	0.20	0.12	-0.17
18,868.00	89.84	179.98	10,680.42	-8,249.97	798.60	8,287.44	0.45	-0.44	0.08
18,963.00	89.87	180.00	10,680.66	-8,344.97	798.62	8,382.14	0.04	0.03	0.02
19,057.00	89.61	179.40	10,681.08	-8,438.97	799.11	8,475.87	0.70	-0.28	-0.64
19,152.00	89.39	179.72	10,681.91	-8,533.96	799.84	8,570.62	0.41	-0.23	0.34
19,246.00	88.77	178.50	10,683.42	-8,627.94	801.30	8,664.41	1.46	-0.66	-1.30
19,341.00	89.43	179.70	10,684.91	-8,722.91	802.79	8,759.19	1.44	0.69	1.26
19,436.00	89.84	179.94	10,685.52	-8,817.91	803.09	8,853.91	0.50	0.43	0.25
19,531.00	89.33	179.71	10,686.21	-8,912.91	803.38	8,948.62	0.59	-0.54	-0.24
19,625.00	89.27	180.00	10,687.36	-9,006.90	803.62	9,042.33	0.32	-0.06	0.31
19,720.00	89.53	180.03	10,688.35	-9,101.89	803.60	9,137.02	0.28	0.27	0.03
19,814.00	89.46	178.69	10,689.18	-9,195.88	804.65	9,230.79	1.43	-0.07	-1.43
19,909.00	89.30	179.61	10,690.21	-9,290.87	806.06	9,325.58	0.98	-0.17	0.97
20,003.00	89.47	180.15	10,691.22	-9,384.86	806.25	9,419.29	0.60	0.18	0.57
20,098.00	89.30	179.62	10,692.24	-9,479.85	806.44	9,513.99	0.59	-0.18	-0.56
20,193.00	89.31	178.98	10,693.39	-9,574.84	807.60	9,608.76	0.67	0.01	-0.67
20,287.00	89.55	180.31	10,694.32	-9,668.83	808.19	9,702.50	1.44	0.26	1.41
20,382.00	89.59	179.48	10,695.04	-9,763.83	808.36	9,797.20	0.87	0.04	-0.87
20,477.00	89.90	179.77	10,695.46	-9,858.82	808.98	9,891.95	0.45	0.33	0.31
20,572.00	90.16	179.77	10,695.41	-9,953.82	809.36	9,986.67	0.27	0.27	0.00
20,733.00	89.44	180.19	10,695.97	-10,114.82	809.42	10,147.15	0.52	-0.45	0.26
Final Phoenix MWD Survey									
20,804.72	89.44	180.19	10,696.67	-10,186.54	809.18	10,218.62	0.00	0.00	0.00
LTP: 20804.72' MD									



Phoenix
Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Llama Mall 26-35 Fed Com 23H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3716.00usft (H&P 419)
Site:	Llama Mall 26-35	MD Reference:	RKB @ 3716.00usft (H&P 419)
Well:	Llama Mall 26-35 Fed Com 23H	North Reference:	Grid
Wellbore:	OH / 73962	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 419)	Database:	USAEDMDB

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
20,847.00	89.44	180.19	10,697.09	-10,228.81	809.04	10,260.75	0.00	0.00	0.00
Projection to TD									

Design Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
936.00	936.00	0.70	0.68	Tie In	
1,065.00	1,065.00	1.27	0.71	First Phoenix MWD Survey	
10,238.36	10,168.03	177.96	765.36	FTP: 10238.36' MD, 15.53° Inc	
20,733.00	10,695.97	-10,114.82	809.42	Final Phoenix MWD Survey	
20,804.72	10,696.67	-10,186.54	809.18	LTP: 20804.72' MD	
20,847.00	10,697.09	-10,228.81	809.04	Projection to TD	

Well Name: LLAMA MALL 26-35 FEDERAL COM	Well Location: T22S / R32E / SEC 26 / LOT 4 / 32.369251 / -103.64987	County or Parish/State: LEA / NM
Well Number: 23H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM086149	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002550306	Operator: OXY USA INCORPORATED	

Subsequent Report

Sundry ID: 2786193

Type of Submission: Subsequent Report	Type of Action: Workover Operations
Date Sundry Submitted: 04/22/2024	Time Sundry Submitted: 12:24
Date Operation Actually Began: 03/23/2024	

Actual Procedure: RUPU 03/23/24, RIH & clean out to PBTD @ 20807', pressure test casing to 6000# for 30 min, good test. RIH & perf @ 10579-20711' Total 1221 holes. Frac in 37 stages w/ 346148BBL Produced Water + 10225BBL Brackish Water (> 1,000 mg/I TDS and 10,000 mg/I TDS) w/ 25457480# sand, RD Liberty 03/30/24. Well ready to produce 04/02/24. OXY USA Inc. requests a tubing exception while continuing to flow back this well. The estimated date of tubing install is 06/15/2024.

Received by OCD: 5/9/2024 12:53:21 PM

Page 13 of 19

Well Name: LLAMA MALL 26-35 FEDERAL COM	Well Location: T22S / R32E / SEC 26 / LOT 4 / 32.369251 / -103.64987	County or Parish/State: LEA / NM
Well Number: 23H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM086149	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002550306	Operator: OXY USA INCORPORATED	

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JANA MENDIOLA	Signed on: APR 22, 2024 12:24 PM
Name: OXY USA INCORPORATED	
Title: Regulatory Advisor	
Street Address: 1600 GEHRIG DR	
City: MIDLAND	State: TX
Phone: (432) 685-5936	
Email address: Janalyn_mendiola@oxy.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: JONATHON W SHEPARD	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 05/02/2024
Signature: Jonathon Shepard	

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505				Form C-105 Revised April 3, 2017												
WELL COMPLETION OR RECOMPLETION REPORT AND LOG																		
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)						5. Lease Name or Unit Agreement Name LLAMA MALL 26-35 FEDERAL COM 6. Well Number: 23H												
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER																		
8. Name of Operator: OXY USA INC.						9. OGRID: 16696												
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710						11. Pool name or Wildcat RED TANK; BONE SPRING												
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County								
Surface:	D	26	22S	32E		270	NORTH	1275	WEST	LEA								
BH:	N	35	22S	32E		58	SOUTH	2014	WEST	LEA								
13. Date Spudded 12/04/2023	14. Date T.D. Reached 02/22/2024		15. Date Rig Released 02/27/2024		16. Date Completed (Ready to Produce) 04/02/2024			17. Elevations (DF and RKB, RT, GR, etc.) 3690' GL										
18. Total Measured Depth of Well 20847'M 10697'V			19. Plug Back Measured Depth 20807'M 10697'V		20. Was Directional Survey Made? YES			21. Type Electric and Other Logs Run CBL										
22. Producing Interval(s), of this completion - Top, Bottom, Name 10579-20711' 2 nd BONE SPRING																		
23. CASING RECORD (Report all strings set in well)																		
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED								
13.375" J55		54.5		982'		17.5"		1215sx-surf circ										
9.625" L-80 HC		40		8785'		12.25"		3460sx-surf circ										
5.5" P110 ICY		20		20832'		8.75" x 8.5"		1807sx-TOC@6732'										
24. LINER RECORD																		
SIZE	TOP	BOTTOM		SACKS CEMENT	SCREEN		25. TUBING RECORD											
							SIZE	DEPTH SET		PACKER SET								
26. Perforation record (interval, size, and number) Perf @ 10579-20711' Total 1221 holes, Hole Size=0.42						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. <table border="1" style="width: 100%; border-collapse: collapse;"><tr><td>DEPTH INTERVAL</td><td>AMOUNT AND KIND MATERIAL USED</td></tr><tr><td>10579-20711'</td><td>346148BBL Produced Water + 10225BBL Brackish Water (> 1,000 mg/l TDS and 10,000 mg/l TDS) w/ 25457480# sand</td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr></table>					DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED	10579-20711'	346148BBL Produced Water + 10225BBL Brackish Water (> 1,000 mg/l TDS and 10,000 mg/l TDS) w/ 25457480# sand				
DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED																	
10579-20711'	346148BBL Produced Water + 10225BBL Brackish Water (> 1,000 mg/l TDS and 10,000 mg/l TDS) w/ 25457480# sand																	
28. PRODUCTION																		
Date First Production 04/09/2024		Production Method (Flowing, gas lift, pumping - Size and type pump) Flowing				Well Status (Prod. or Shut-in) Prod.												
Date of Test 04/22/2024	Hours Tested 24 hrs.	Choke Size 128	Prod'n For Test Period	Oil - Bbl 4229	Gas - MCF 4713	Water - Bbl. 8049	Gas - Oil Ratio 1114											
Flow Tubing Press.	Casing Pressure 1110	Calculated 24-Hour Rate	Oil - Bbl. 4229	Gas - MCF 4713	Water - Bbl. 8049	Oil Gravity - API - (Corr.)												
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD							30. Test Witnessed By											
31. List Attachments WBD, C-104, As-Drilled C-102, Final Directional Survey, Completion Sundry C-103																		
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.							33. Rig Release Date:											
34. If an on-site burial was used at the well, report the exact location of the on-site burial: Latitude _____ Longitude _____ NAD83																		
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief Printed																		
Signature: <i>Jana Mendiola</i>		Name: Jana Mendiola			Title: Regulatory Advisor			Date: 05/09/2024										
E-mail Address: janalyn_mendiola@oxy.com																		

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 932'	T. Bell Canyon 4850'	T. Ojo Alamo	T. Penn A"
T. Salado 1511'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 3342'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 4785'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 5703'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 6970'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Spring 8602'	T. Todilto	
T. Abo	T. 1st Bone Spring 9713'	T. Entrada	
T. Wolfcamp	T. 2nd Bone Spring 10395'	T. Wingate	
T. Penn	T. 3 rd Bone Spring	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....


No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

OXY USA Inc.
LLAMA MALL 26-35 FEDERAL COM 23H
API No. 30-025-50306

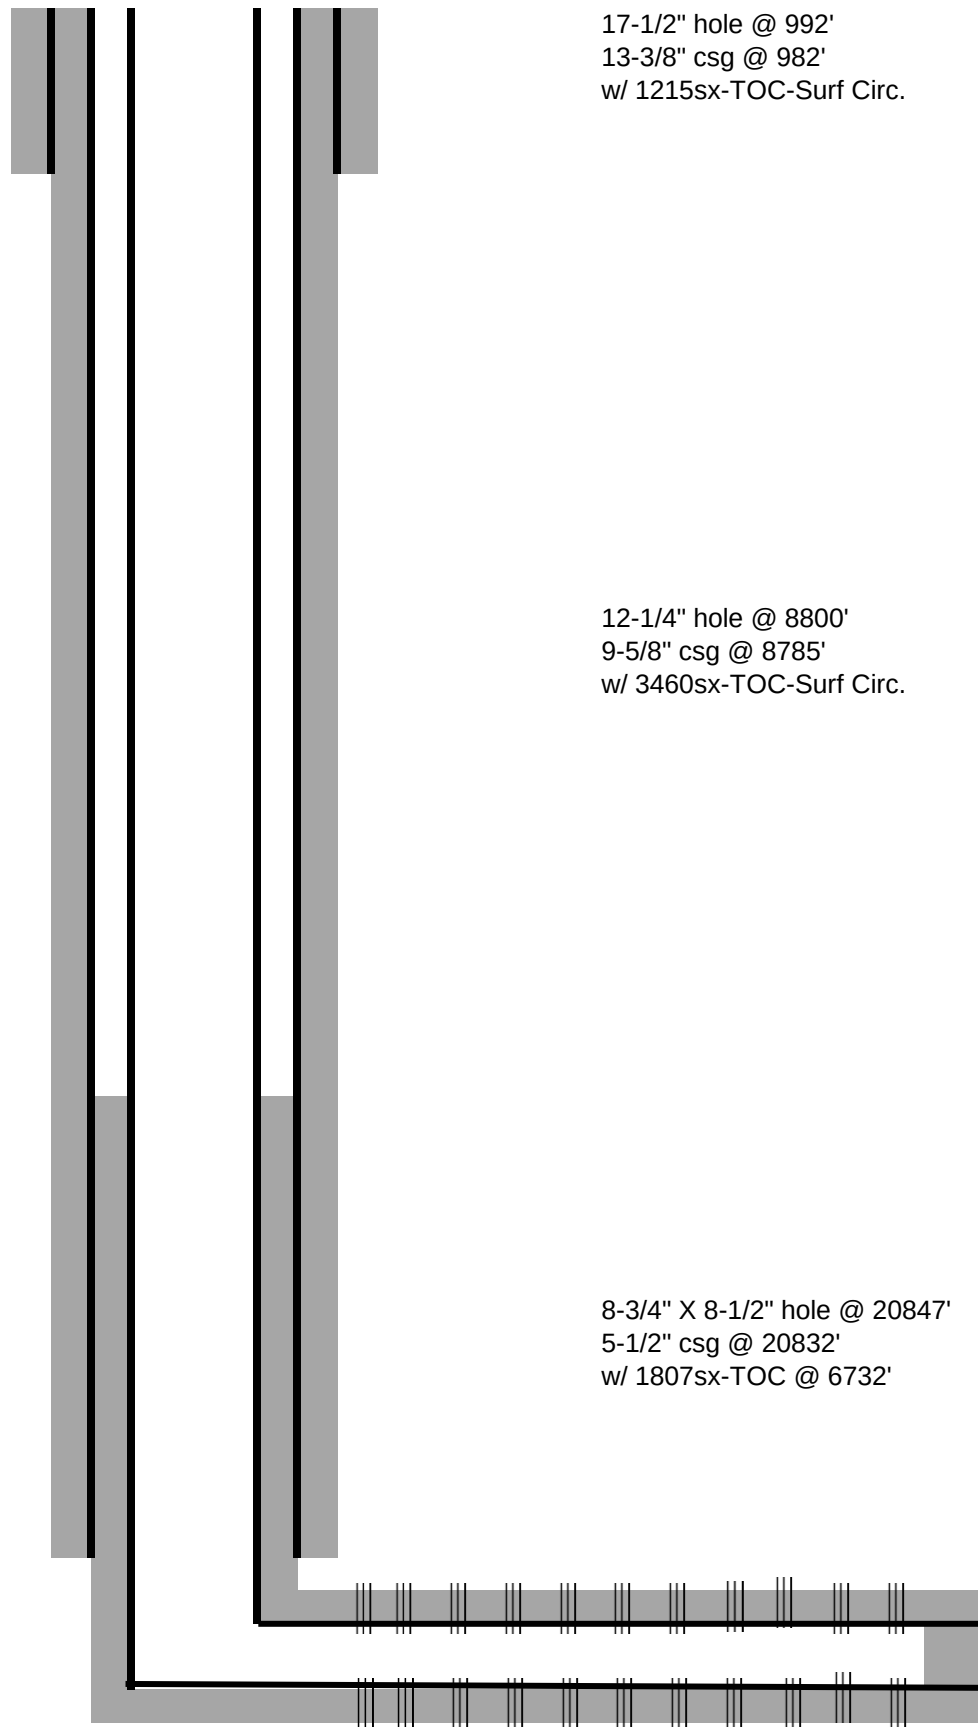

17-1/2" hole @ 992'
13-3/8" csg @ 982'
w/ 1215sx-TOC-Surf Circ.

12-1/4" hole @ 8800'
9-5/8" csg @ 8785'
w/ 3460sx-TOC-Surf Circ.

8-3/4" X 8-1/2" hole @ 20847'
5-1/2" csg @ 20832'
w/ 1807sx-TOC @ 6732'

Perfs @ 10579-20711'

TD- 20847'M 10697'V

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 342608

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 342608
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 342608

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 342608
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	File 3160-4 Completion Report within 10 days of BLM approval.	5/29/2024