

Well Name: SKELLY UNIT	Well Location: T17S / R31E / SEC 23 / NWNW /	County or Parish/State: EDDY / NM
Well Number: 40	Type of Well: INJECTION - ENHANCED RECOVERY	Allottee or Tribe Name:
Lease Number: NMLC029418A	Unit or CA Name: SKELLY-SAN ANDRES	Unit or CA Number: NMNM71030A
US Well Number: 3001505360	Operator: LH OPERATING LLC	

Notice of Intent

Sundry ID: 2789289

Type of Submission: Notice of Intent	Type of Action: Workover Operations
Date Sundry Submitted: 05/09/2024	Time Sundry Submitted: 10:00
Date proposed operation will begin: 06/01/2024	

Procedure Description: 1. Move in rig up workover rig. Bleed off well head pressure. ND wellhead and NU BOP. 2. Unhook injection line and meter run. 3. ND wellhead and NU BOP. 4. Unset packer. Pull out of hole with tubing. Inspect tubing as pulling out of hole. 5. Send packer to shop for redress or replace with new packer based on condition. 6. Replace tubing as needed from visual inspection. 7. Pick up reconditioned or new packer and run in hole on the tubing while testing the tubing below the slips to 4500 psi (test tools to be coated). Replace tubing as needed. 8. Once on depth above perforations, circulate in packer fluid (corrosion inhibitor and biocide) mixed in fresh water. 9. Set packer. ND BOP and NU wellhead. Install meter run. 10. Notify NMOC field representative to witness test. Perform mechanical integrity test. Return to water injection.

Surface Disturbance

Is any additional surface disturbance proposed?: No

Well Name: SKELLY UNIT	Well Location: T17S / R31E / SEC 23 / NWNW /	County or Parish/State: EDDY / NM
Well Number: 40	Type of Well: INJECTION - ENHANCED RECOVERY	Allottee or Tribe Name:
Lease Number: NMLC029418A	Unit or CA Name: SKELLY-SAN ANDRES	Unit or CA Number: NMNM71030A
US Well Number: 3001505360	Operator: LH OPERATING LLC	

Conditions of Approval

Specialist Review

Workover_or_Vertical_Deepen_COA_20240515213932.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: MICHAEL BURTON	Signed on: MAY 09, 2024 10:00 AM
Name: LH OPERATING LLC	
Title: Environmental Manager	
Street Address: 3730 KIRBY DR SUITE 1200	
City: HOUSTON	State: TX
Phone: (575) 499-5306	
Email address: MIKE@LHOPERATING.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: JONATHON W SHEPARD	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Approved	Disposition Date: 05/15/2024
Signature: Jonathon Shepard	

Form 3160-5
(June 2019)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on page 2		5. Lease Serial No.
1. Type of Well ☐ Oil Well ☐ Gas Well ☐ Other		6. If Indian, Allottee or Tribe Name
2. Name of Operator		7. If Unit of CA/Agreement, Name and/or No.
3a. Address	3b. Phone No. (include area code)	8. Well Name and No.
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)		9. API Well No.
		10. Field and Pool or Exploratory Area
		11. Country or Parish, State

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA				
TYPE OF SUBMISSION	TYPE OF ACTION			
☐ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)		
	Title	
Signature	Date	

THE SPACE FOR FEDERAL OR STATE OFFICE USE		
Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NWNW / 660 FNL / 660 FWL / TWSP: 17S / RANGE: 31E / SECTION: 23 / LAT: 0.0 / LONG: 0.0 (TVD: 0 feet, MD: 0 feet)

BHL: NWNW / 660 FNL / 660 FWL / TWSP: 17S / SECTION: / LAT: 0.0 / LONG: 0.0 (TVD: 0 feet, MD: 0 feet)

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972

Conditions of Approval for Workover/Deepening of a Well

1. Notification: Contact the appropriate BLM office at least 24 hours prior to the commencing of any operations. For wells in Eddy County, call 575-361-2822. For wells in Lea County, call 575-689-5981
2. Blowout Preventers: A blowout preventer (BOP), as appropriate, shall be installed before commencing any operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,100 feet, a 3M system for a well not deeper than 13,600 feet, or a 5M system for a well not deeper than 22,700 feet (all depths are for measured well depth).
3. Cement: Notify BLM if cement fails to circulate.
4. Subsequent Reporting: Within 30 days after work is completed, file a Subsequent Report (Form 3160-5) to BLM. The report should give in detail the manner in which the work was carried out. Show date work was completed. If producing a new zone, submit a Completion Report (Form 3160-4) with the Subsequent Report.
5. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.
6. If well location is within the Timing Limitation Stipulation Area for Lesser Prairie-Chicken: From March 1st through June 15th annually, activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted.


WellView®

Downhole Well Profile

Well Name: SKELLY UNIT 040

API/UWI 3001505360	Surface Legal Location	Field Name PBNM - PB-SKELLY	Spud Date Notice Information	State/Province NM	Well Configuration Type
Original KB Elevation (ft) 3,863.00	KB-Tubing Head Distance (ft)	Initial Spud Date 7/21/1934 00:00	Rig Release Date	PBTD (All) (ftKB)	Total Depth All (TVD) (ftKB)

Type						
Des	Make	Model	WP (psi)	Service	WP Top (psi)	Bore Min (in)

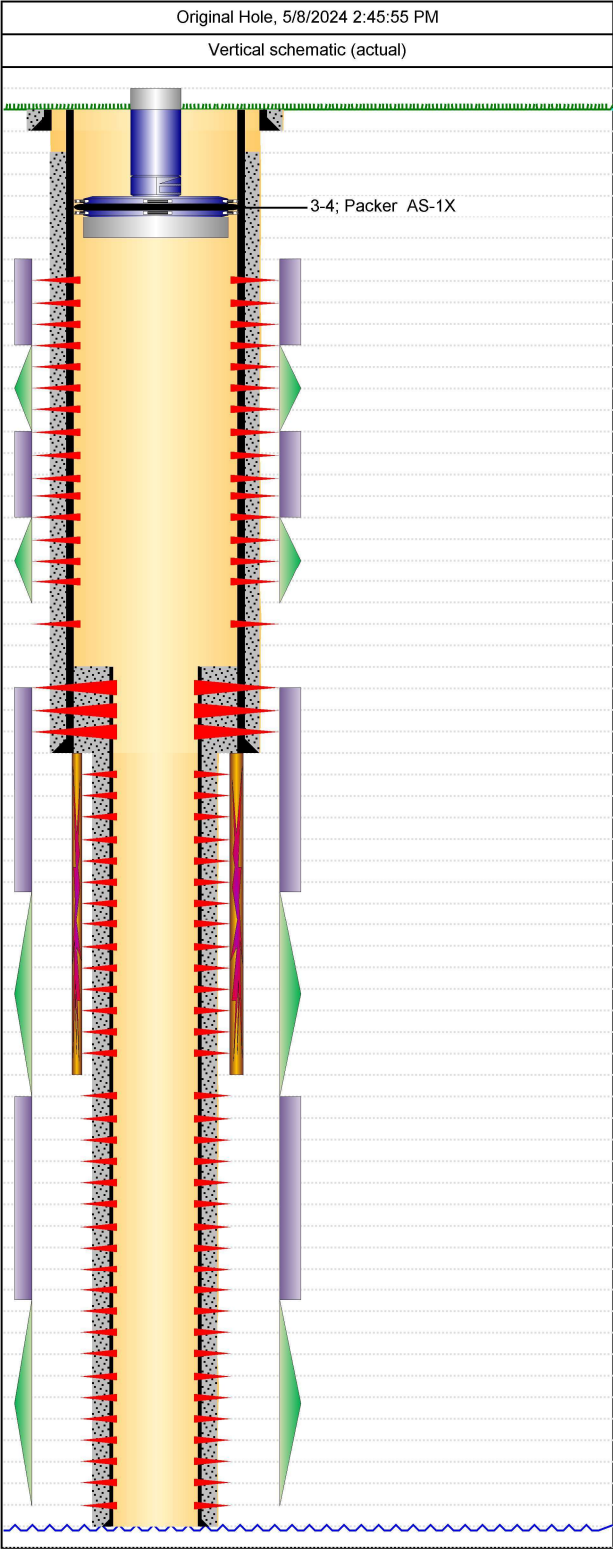


Casing Strings					
Csg Des	OD (in)	Wt/Len (lb/ft)	Grade	Top Thread	Set Depth (ftKB)
Surface	10 3/4	40.50	J-55		677.0
Production	8 5/8	32.00	J-55		3,261.0
Liner	4 1/2	10.50	J-55		3,827.0
Perforations					
Date	Top (ftKB)	Btm (ftKB)	Linked Zone		
4/12/1979	2,324.0	2,324.0			
4/12/1979	2,326.0	2,326.0			
4/12/1979	2,331.0	2,331.0			
4/12/1979	2,334.0	2,334.0			
4/12/1979	2,336.0	2,336.0			
4/12/1979	2,348.0	2,348.0			
4/12/1979	2,365.0	2,365.0			
4/12/1979	2,368.0	2,368.0			
4/12/1979	2,382.0	2,382.0			
4/12/1979	2,384.0	2,384.0			
4/12/1979	2,385.0	2,385.0			
4/12/1979	2,417.0	2,417.0			
4/12/1979	2,440.0	2,440.0			
4/12/1979	2,441.0	2,441.0			
4/12/1979	2,443.0	2,443.0			
2/2/1978	2,510.0	2,510.0			
5/3/1967	3,220.0	3,220.0			
5/3/1967	3,230.0	3,230.0			
5/3/1967	3,252.0	3,252.0			
5/3/1967	3,287.0	3,287.0			
5/3/1967	3,322.0	3,322.0			
5/3/1967	3,329.0	3,329.0			
5/3/1967	3,340.0	3,340.0			
5/3/1967	3,346.0	3,346.0			
5/3/1967	3,356.0	3,356.0			
5/3/1967	3,361.0	3,361.0			
5/3/1967	3,369.5	3,369.5			
5/3/1967	3,378.0	3,378.0			
5/3/1967	3,394.0	3,394.0			
5/3/1967	3,414.0	3,414.0			
5/3/1967	3,427.0	3,427.0			
5/3/1967	3,451.0	3,451.0			
5/3/1967	3,463.0	3,463.0			
5/3/1967	3,473.0	3,473.0			
5/3/1967	3,490.0	3,490.0			
5/3/1967	3,515.0	3,515.0			
5/3/1967	3,520.0	3,520.0			
5/3/1967	3,535.0	3,535.0			
5/3/1967	3,579.0	3,579.0			
5/3/1967	3,585.0	3,585.0			
5/3/1967	3,601.0	3,601.0			
5/3/1967	3,614.0	3,614.0			
5/3/1967	3,631.0	3,631.0			
5/3/1967	3,700.0	3,700.0			
5/3/1967	3,717.0	3,717.0			
5/3/1967	3,722.0	3,722.0			

WellView®

Downhole Well Profile

Well Name: SKELLY UNIT 040

API/UWI 3001505360	Surface Legal Location	Field Name PBNM - PB-SKELLY	Spud Date Notice Information	State/Province NM	Well Configuration Type
Original KB Elevation (ft) 3,863.00	KB-Tubing Head Distance (ft)	Initial Spud Date 7/21/1934 00:00	Rig Release Date	PBTD (All) (ftKB)	Total Depth All (TVD) (ftKB)

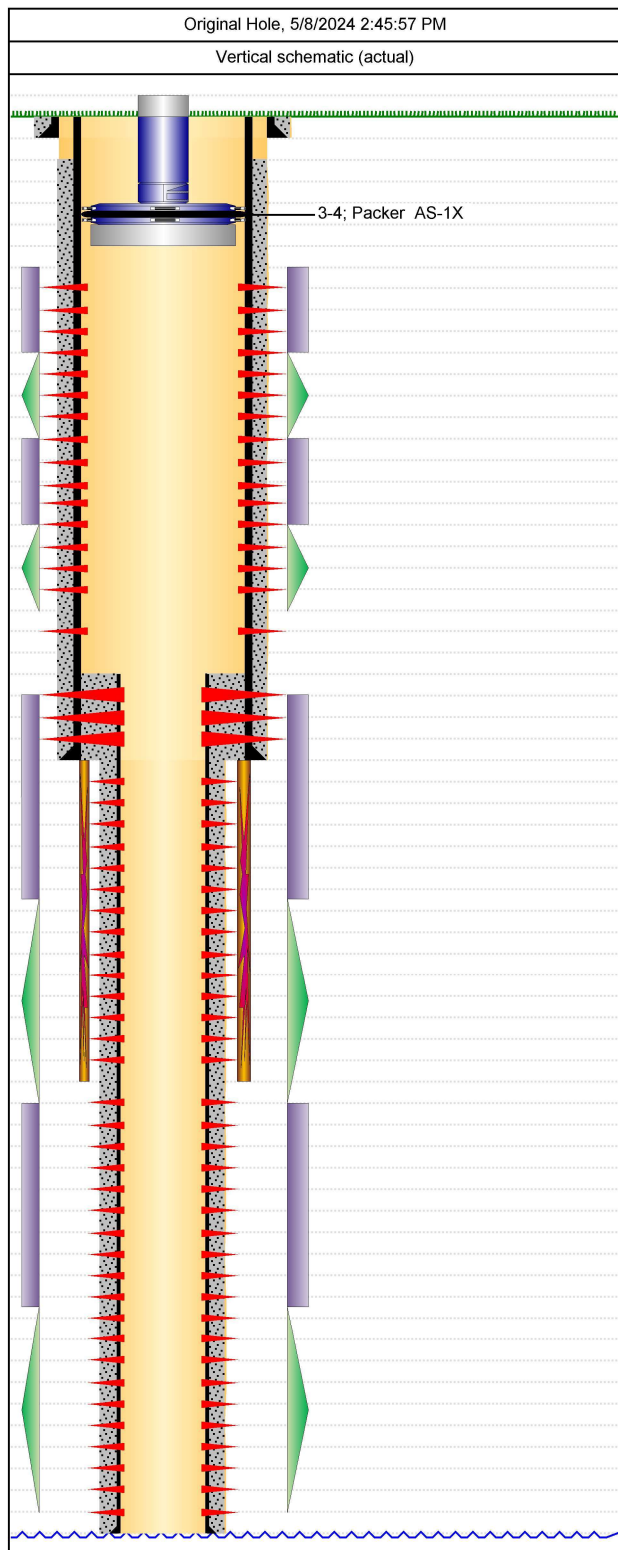

Perforations			
Date	Top (ftKB)	Btm (ftKB)	Linked Zone
5/3/1967	3,736.0	3,736.0	
5/3/1967	3,740.0	3,740.0	
5/3/1967	3,758.0	3,758.0	
5/3/1967	3,776.0	3,776.0	
5/3/1967	3,800.0	3,800.0	
5/3/1967	3,815.5	3,815.5	
5/3/1967	3,819.5	3,819.5	

Tubing Strings							
Tubing Description Tubing - Production		Run Date 9/18/2017		String Length (ft) 2,203.87		Set Depth (ftKB) 2,196.0	
Item Des	Jts	Make	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)
Tubing Pup Joint	1		T&C Non-Upset	2 3/8	4.60	J-55	8.00
Tubing	67		T&C Non-Upset	2 3/8	4.00	J-55	2,184.00
Profile Nipple	1			2 3/8			1.87
Packer AS-1X	1	Baker		7			4.00
Tubing Pup Joint	1			7			6.00
Tubing Description Tubing - Injection		Run Date 9/21/2017		String Length (ft)		Set Depth (ftKB) 2,196.0	
Item Des	Jts	Make	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)

Rod Strings							
Rod Description		Run Date		String Length (ft)		Set Depth (ftKB)	
Item Des	Jts	Make	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 345057

CONDITIONS

Operator: LH Operating, LLC 3730 Kirby Drive Houston, TX 77098	OGRID: 329319
	Action Number: 345057
	Action Type: [C-103] NOI Workover (C-103G)

CONDITIONS

Created By	Condition	Condition Date
mgebremichael	Ensure that the setting depth of the packer is not more than 100 ft above the top part of the injection interval. Should the workover require tubing replacement, the same size tube shall be replaced as prescribed in the respective order.	8/2/2024