

District I
1625 N. French Dr., Hobbs, NM 88240

District II

811 S. First St., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104
Revised August 1, 2011

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT**I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT**

¹ Operator name and Address OXY USA INC P.O. BOX 4294 HOUSTON, TX 77210		² OGRID Number 16696
		³ Reason for Filing Code/ Effective Date – NW (04/10/2024)
⁴ API Number 30-025-52191	⁵ Pool Name BILBREY BASIN; BONE SPRING	⁶ Pool Code 5695
⁷ Property Code: 334838	⁸ Property Name: GOLD LOG 4-9 FEDERAL COM	⁹ Well Number: 74H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
B	4	22S	32E	2	396'	NORTH	1585'	EAST	LEA

¹¹ Bottom Hole Location FTP: 520' FNL 529' FEL LTP- 181' FSL 567' FEL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	9	22S	32E		57'	SOUTH	561'	EAST	LEA
¹² Lse Code F	¹³ Producing Method Code : F	¹⁴ Gas Connection Date: 04/09/2024	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
237722	CENTURION PIPELINE L.P.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 11/18/2023	²² Ready Date 04/13/2024	²³ TD 21395'M/11212'V	²⁴ PBSD 21350'M/11212'	²⁵ Perforations 11395' -21270'MD	²⁶ DHC, MC NSHSU-R-22684
²⁷ Hole Size	²⁸ Casing & Tubing Size	²⁹ Depth Set	³⁰ Sacks Cement		
17-1/2"	13-3/8"	1020'	1300sx – SURF		
9-7/8"	7-5/8"	10561'	4293sx - SURF		
6-3/4"	5-1/2"	21375'	650sx – TOC ~7804'		
	2-3/8"	11217'			

V. Well Test Data

³¹ Date New Oil 04/13/2024	³² Gas Delivery Date 04/13/2024	³³ Test Date 04/24/2024	³⁴ Test Length 24 hours	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 545psi
³⁷ Choke Size	³⁸ Oil 1603	³⁹ Water 3817	⁴⁰ Gas 2914		⁴¹ Test Method FLOWING

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: *Leslie T. Reeves*Printed name:
LESLIE REEVESTitle:
REGULATORY MANAGERE-mail Address:
LESLIE_REEVES@oxy.comDate: 06/05/2024
Phone: 713-497-2492

OIL CONSERVATION DIVISION

Approved by:

Title:

Approval Date:

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102 Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT
AS-DRILLED

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-025-52191	² Pool Code 5695	³ Pool Name BILBREY BASIN; BONE SPRING
⁴ Property Code 334838	⁵ Property Name GOLD LOG 4 9 FED COM	⁶ Well Number 74H
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁹ Elevation 3796'


¹⁰ Surface Location

UL or lot no. L 2	Section 4	Township 22S	Range 32E	Lot Idn	Feet from the 396	North/South line NORTH	Feet from the 1585	East/West line EAST	County LEA
----------------------	--------------	-----------------	--------------	---------	----------------------	---------------------------	-----------------------	------------------------	---------------

¹¹ Bottom Hole Location If Different From Surface

UL or lot no. P	Section 9	Township 22S	Range 32E	Lot Idn	Feet from the 57	North/South line SOUTH	Feet from the 561	East/West line EAST	County LEA
¹² Dedicated Acres 1279.16	¹³ Joint or Infill YES	¹⁴ Consolidation Code	¹⁵ Order No. NSHSU-R-22684						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

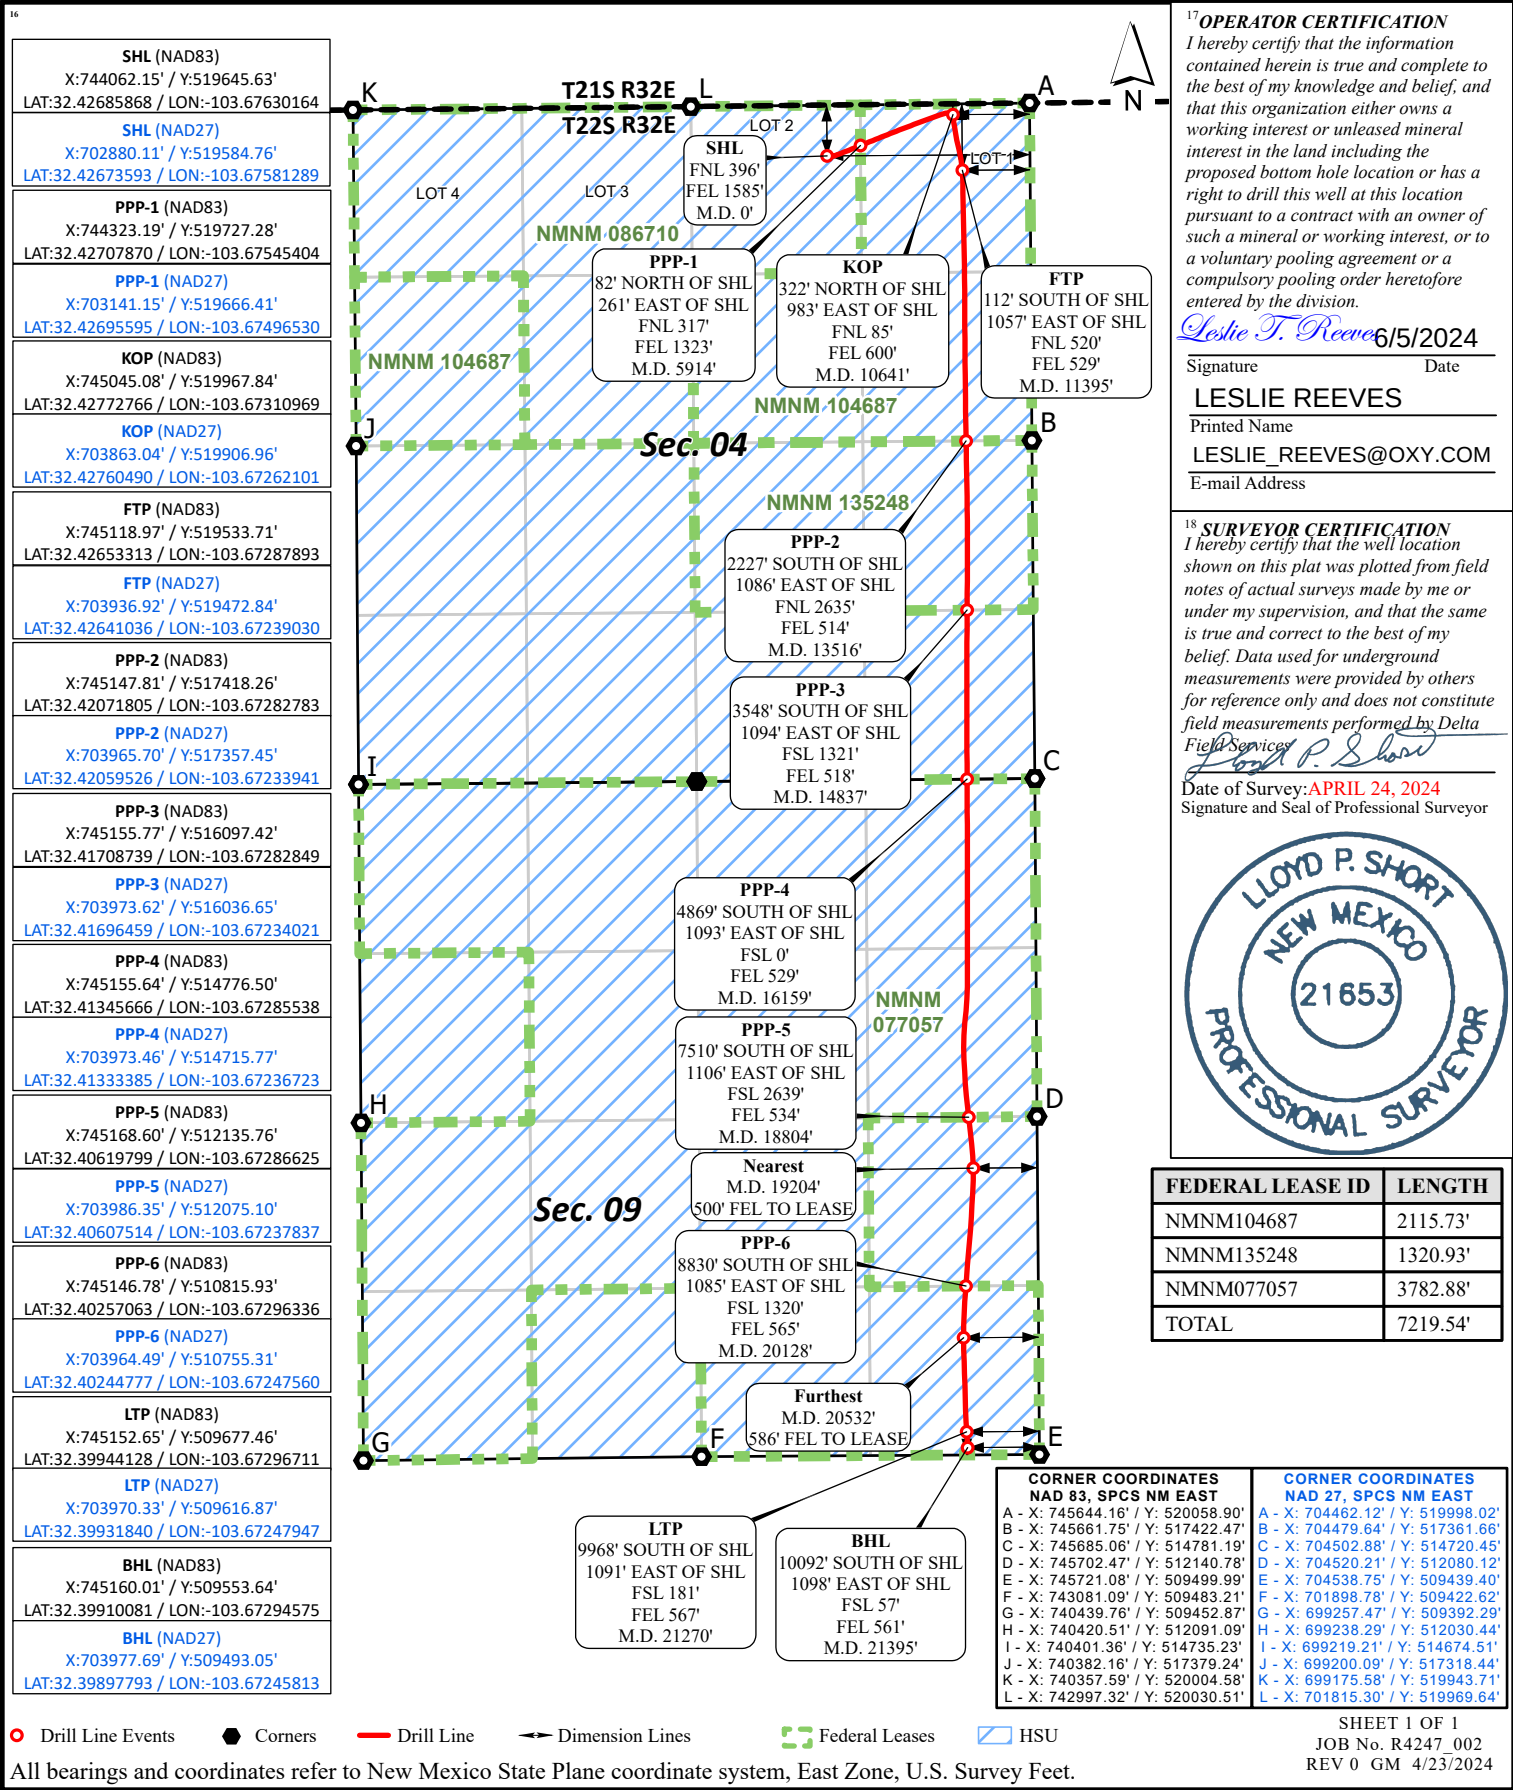



OXY USA INC.

Lea County, NM (NAD83-NME)

Gold Log 4-9 Fed Com

Gold Log 4-9 Fed Com 74H

OH / 73835

Design: Surveys (H&P 423)

Standard Survey Report

28 February, 2024





Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Gold Log 4-9 Fed Com 74H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3822.00usft (H&P 423)
Site:	Gold Log 4-9 Fed Com	MD Reference:	RKB @ 3822.00usft (H&P 423)
Well:	Gold Log 4-9 Fed Com 74H	North Reference:	Grid
Wellbore:	OH / 73835	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 423)	Database:	USAEDMDB

Project	Lea County, NM (NAD83-NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Gold Log 4-9 Fed Com		
Site Position:		Northing:	519,645.63 usft
From:	Map	Easting:	744,032.15 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 25' 36.693060 N
		Longitude:	103° 40' 35.035930 W

Well	Gold Log 4-9 Fed Com 74H		
Well Position	+N/-S	0.00 usft	Northing: 519,645.63 usft
	+E/-W	0.00 usft	Easting: 744,062.15 usft
Position Uncertainty	0.90 usft	Wellhead Elevation:	usft
Grid Convergence:	0.352 °	Ground Level:	3,796.00 usft

Wellbore	OH / 73835				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IFR	1/25/2023	6.544	60.104	47,663.80000000

Design	Surveys (H&P 423)				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	173.64	

Survey Program		Date	2/28/2024		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
26.00	974.00	MWD Surveys - Adj Surface (OH / 73835)	B004Mb_MWD+HRGM+Σ OWSG MWD + HRGM + Sag Correction		
1,088.00	10,453.00	Phoenix MWD Surveys - SQC Intermediat	SQC_C705Mb_MWD+IFF MWD+IFR1+Sag+FDIR		
10,641.00	17,649.00	BHI MWD Surveys - SQC R4 (OH / 73835)	SQC_C705Mb_MWD+IFF MWD+IFR1+Sag+FDIR		
17,782.00	21,395.00	Phoenix MWD Surveys - SQC Lateral (OH	SQC_C705Mb_MWD+IFF MWD+IFR1+Sag+FDIR		

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
26.00	0.00	0.00	26.00	0.00	0.00	0.00	0.00	0.00	0.00
171.00	0.34	192.91	171.00	-0.42	-0.10	0.41	0.23	0.23	0.00
257.00	0.51	196.50	257.00	-1.04	-0.26	1.00	0.20	0.20	4.17
351.00	0.42	194.12	350.99	-1.77	-0.46	1.71	0.10	-0.10	-2.53
445.00	0.53	184.82	444.99	-2.54	-0.59	2.46	0.14	0.12	-9.89
539.00	0.42	178.06	538.99	-3.32	-0.61	3.23	0.13	-0.12	-7.19



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Gold Log 4-9 Fed Com 74H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3822.00usft (H&P 423)
Site:	Gold Log 4-9 Fed Com	MD Reference:	RKB @ 3822.00usft (H&P 423)
Well:	Gold Log 4-9 Fed Com 74H	North Reference:	Grid
Wellbore:	OH / 73835	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 423)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
634.00	0.46	171.51	633.98	-4.04	-0.54	3.96	0.07	0.04	-6.89
728.00	0.47	170.25	727.98	-4.79	-0.42	4.72	0.02	0.01	-1.34
822.00	0.31	173.62	821.98	-5.43	-0.33	5.36	0.17	-0.17	3.59
916.00	0.27	175.42	915.98	-5.90	-0.28	5.83	0.04	-0.04	1.91
974.00	0.40	172.91	973.98	-6.24	-0.25	6.17	0.23	0.22	-4.33
Tie In									
1,088.00	0.26	173.75	1,087.97	-6.89	-0.17	6.83	0.12	-0.12	0.74
First Phoenix MWD Survey									
1,183.00	0.44	194.03	1,182.97	-7.46	-0.23	7.39	0.23	0.19	21.35
1,271.00	0.46	158.80	1,270.97	-8.11	-0.19	8.04	0.31	0.02	-40.03
1,364.00	1.61	83.14	1,363.96	-8.31	1.24	8.39	1.68	1.24	-81.35
1,459.00	3.68	72.54	1,458.85	-7.23	5.48	7.79	2.23	2.18	-11.16
1,554.00	5.40	72.02	1,553.55	-4.94	12.64	6.31	1.81	1.81	-0.55
1,649.00	4.28	75.84	1,648.21	-2.69	20.33	4.92	1.23	-1.18	4.02
1,743.00	4.45	78.15	1,741.94	-1.08	27.30	4.10	0.26	0.18	2.46
1,838.00	4.38	76.57	1,836.65	0.52	34.43	3.30	0.15	-0.07	-1.66
1,933.00	4.07	80.28	1,931.40	1.93	41.29	2.66	0.43	-0.33	3.91
2,028.00	0.99	106.01	2,026.29	2.27	45.40	2.77	3.38	-3.24	27.08
2,123.00	0.15	155.94	2,121.29	1.93	46.24	3.20	0.95	-0.88	52.56
2,218.00	0.11	57.45	2,216.29	1.87	46.37	3.28	0.21	-0.04	-103.67
2,313.00	0.12	82.04	2,311.29	1.93	46.54	3.24	0.05	0.01	25.88
2,408.00	0.26	156.15	2,406.29	1.75	46.73	3.44	0.27	0.15	78.01
2,503.00	0.18	141.81	2,501.29	1.43	46.91	3.77	0.10	-0.08	-15.09
2,598.00	0.32	149.17	2,596.29	1.09	47.13	4.14	0.15	0.15	7.75
2,693.00	0.28	146.14	2,691.29	0.67	47.40	4.59	0.05	-0.04	-3.19
2,788.00	0.41	154.27	2,786.28	0.17	47.68	5.11	0.15	0.14	8.56
2,883.00	0.13	206.39	2,881.28	-0.24	47.78	5.53	0.36	-0.29	54.86
2,978.00	0.38	305.00	2,976.28	-0.15	47.47	5.41	0.44	0.26	103.80
3,073.00	0.14	83.90	3,071.28	0.04	47.33	5.20	0.52	-0.25	146.21
3,168.00	0.27	93.41	3,166.28	0.04	47.67	5.24	0.14	0.14	10.01
3,263.00	0.69	87.61	3,261.28	0.05	48.46	5.32	0.44	0.44	-6.11
3,358.00	0.24	149.99	3,356.27	-0.10	49.13	5.54	0.65	-0.47	65.66
3,454.00	0.08	23.66	3,452.27	-0.21	49.26	5.66	0.31	-0.17	-131.59
3,549.00	0.16	75.79	3,547.27	-0.12	49.41	5.59	0.13	0.08	54.87
3,644.00	0.20	78.44	3,642.27	-0.05	49.71	5.56	0.04	0.04	2.79
3,738.00	0.33	108.48	3,736.27	-0.10	50.12	5.65	0.20	0.14	31.96
3,833.00	0.40	145.00	3,831.27	-0.46	50.57	6.06	0.25	0.07	38.44
3,928.00	0.10	307.04	3,926.27	-0.68	50.70	6.29	0.52	-0.32	170.57
4,024.00	0.18	227.19	4,022.27	-0.74	50.52	6.33	0.20	0.08	-83.18
4,118.00	0.27	168.95	4,116.27	-1.05	50.45	6.64	0.25	0.10	-61.96
4,213.00	0.16	207.17	4,211.27	-1.39	50.44	6.97	0.18	-0.12	40.23
4,308.00	0.32	188.69	4,306.27	-1.77	50.34	7.34	0.18	0.17	-19.45
4,403.00	0.17	189.51	4,401.27	-2.17	50.27	7.73	0.16	-0.16	0.86
4,498.00	0.21	242.32	4,496.27	-2.39	50.09	7.93	0.18	0.04	55.59



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Gold Log 4-9 Fed Com 74H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3822.00usft (H&P 423)
Site:	Gold Log 4-9 Fed Com	MD Reference:	RKB @ 3822.00usft (H&P 423)
Well:	Gold Log 4-9 Fed Com 74H	North Reference:	Grid
Wellbore:	OH / 73835	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 423)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,594.00	0.12	252.97	4,592.27	-2.50	49.84	8.01	0.10	-0.09	11.09
4,689.00	0.18	20.07	4,687.27	-2.39	49.80	7.89	0.28	0.06	133.79
4,784.00	0.12	223.26	4,782.27	-2.33	49.78	7.82	0.31	-0.06	-165.06
4,878.00	2.17	66.53	4,876.24	-1.69	51.35	7.36	2.43	2.18	-166.73
4,973.00	5.24	68.21	4,971.03	0.64	57.03	5.68	3.23	3.23	1.77
5,068.00	8.68	68.92	5,065.32	4.83	67.75	2.70	3.62	3.62	0.75
5,163.00	11.85	70.45	5,158.79	10.67	83.63	-1.34	3.35	3.34	1.61
5,258.00	13.39	69.02	5,251.49	17.88	103.09	-6.35	1.65	1.62	-1.51
5,353.00	15.01	68.46	5,343.58	26.33	124.81	-12.35	1.71	1.71	-0.59
5,448.00	15.34	67.81	5,435.27	35.59	147.89	-19.00	0.39	0.35	-0.68
5,543.00	15.32	68.24	5,526.89	44.99	171.18	-25.76	0.12	-0.02	0.45
5,638.00	15.01	67.98	5,618.58	54.26	194.24	-32.41	0.33	-0.33	-0.27
5,733.00	15.01	67.77	5,710.34	63.52	217.03	-39.10	0.06	0.00	-0.22
5,828.00	15.31	67.43	5,802.04	72.99	240.00	-45.96	0.33	0.32	-0.36
5,922.00	15.40	67.82	5,892.68	82.47	263.02	-52.83	0.15	0.10	0.41
6,017.00	15.11	67.77	5,984.33	91.91	286.16	-59.65	0.31	-0.31	-0.05
6,112.00	14.98	68.40	6,076.08	101.12	309.04	-66.27	0.22	-0.14	0.66
6,207.00	15.31	68.14	6,167.78	110.31	332.09	-72.85	0.35	0.35	-0.27
6,302.00	15.32	68.38	6,259.40	119.60	355.40	-79.50	0.07	0.01	0.25
6,396.00	15.15	68.17	6,350.10	128.74	378.35	-86.05	0.19	-0.18	-0.22
6,491.00	15.23	68.17	6,441.78	138.00	401.45	-92.69	0.08	0.08	0.00
6,586.00	15.16	68.31	6,533.46	147.23	424.58	-99.30	0.08	-0.07	0.15
6,681.00	15.16	68.59	6,625.15	156.36	447.69	-105.81	0.08	0.00	0.29
6,776.00	15.20	68.40	6,716.84	165.48	470.83	-112.31	0.07	0.04	-0.20
6,871.00	15.16	68.29	6,808.52	174.66	493.95	-118.87	0.05	-0.04	-0.12
6,965.00	15.18	68.34	6,899.25	183.74	516.81	-125.37	0.03	0.02	0.05
7,060.00	14.95	68.55	6,990.98	192.82	539.77	-131.85	0.25	-0.24	0.22
7,155.00	15.26	69.29	7,082.70	201.72	562.87	-138.14	0.38	0.33	0.78
7,250.00	14.85	69.35	7,174.44	210.43	585.96	-144.24	0.43	-0.43	0.06
7,344.00	15.05	69.34	7,265.26	218.99	608.65	-150.23	0.21	0.21	-0.01
7,439.00	15.15	69.23	7,356.98	227.74	631.80	-156.36	0.11	0.11	-0.12
7,534.00	14.95	69.19	7,448.72	236.50	654.86	-162.51	0.21	-0.21	-0.04
7,629.00	15.25	69.46	7,540.44	245.23	678.01	-168.63	0.32	0.32	0.28
7,724.00	14.65	70.06	7,632.22	253.71	701.01	-174.51	0.65	-0.63	0.63
7,819.00	15.08	70.18	7,724.04	262.00	723.93	-180.21	0.45	0.45	0.13
7,913.00	14.64	68.95	7,814.90	270.41	746.52	-186.07	0.58	-0.47	-1.31
8,008.00	14.87	69.33	7,906.77	279.03	769.12	-192.13	0.26	0.24	0.40
8,103.00	14.87	69.82	7,998.59	287.54	791.97	-198.05	0.13	0.00	0.52
8,198.00	14.78	69.61	8,090.42	295.96	814.77	-203.90	0.11	-0.09	-0.22
8,293.00	15.07	69.73	8,182.22	304.46	837.72	-209.81	0.31	0.31	0.13
8,387.00	14.69	69.75	8,273.07	312.82	860.36	-215.61	0.40	-0.40	0.02
8,482.00	14.35	71.31	8,365.03	320.77	882.81	-221.01	0.55	-0.36	1.64
8,577.00	13.34	73.45	8,457.27	327.66	904.47	-225.47	1.19	-1.06	2.25

Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Gold Log 4-9 Fed Com 74H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3822.00usft (H&P 423)
Site:	Gold Log 4-9 Fed Com	MD Reference:	RKB @ 3822.00usft (H&P 423)
Well:	Gold Log 4-9 Fed Com 74H	North Reference:	Grid
Wellbore:	OH / 73835	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 423)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,672.00	11.75	77.71	8,550.00	332.84	924.43	-228.41	1.94	-1.67	4.48
8,767.00	10.25	82.40	8,643.26	336.02	942.26	-229.59	1.84	-1.58	4.94
8,861.00	8.50	89.38	8,736.00	337.20	957.50	-229.08	2.22	-1.86	7.43
8,956.00	6.49	95.27	8,830.18	336.78	969.87	-227.29	2.26	-2.12	6.20
9,051.00	4.23	102.45	8,924.76	335.53	978.64	-225.08	2.48	-2.38	7.56
9,146.00	2.45	108.38	9,019.60	334.14	983.98	-223.10	1.91	-1.87	6.24
9,240.00	1.19	119.78	9,113.55	333.02	986.74	-221.68	1.39	-1.34	12.13
9,335.00	0.58	165.46	9,208.54	332.06	987.72	-220.63	0.93	-0.64	48.08
9,430.00	0.18	225.31	9,303.54	331.49	987.73	-220.06	0.54	-0.42	63.00
9,525.00	0.29	256.80	9,398.54	331.33	987.39	-219.94	0.17	0.12	33.15
9,620.00	0.28	249.83	9,493.54	331.20	986.94	-219.85	0.04	-0.01	-7.34
9,715.00	0.42	267.08	9,588.53	331.10	986.37	-219.82	0.18	0.15	18.16
9,810.00	0.50	295.94	9,683.53	331.26	985.65	-220.06	0.25	0.08	30.38
9,905.00	0.38	283.56	9,778.53	331.52	984.97	-220.39	0.16	-0.13	-13.03
10,000.00	0.27	322.59	9,873.53	331.77	984.53	-220.69	0.25	-0.12	41.08
10,095.00	0.14	341.07	9,968.53	332.06	984.36	-220.99	0.15	-0.14	19.45
10,190.00	0.15	252.74	10,063.53	332.13	984.20	-221.08	0.21	0.01	-92.98
10,285.00	0.20	222.19	10,158.53	331.97	983.97	-220.95	0.11	0.05	-32.16
10,380.00	0.27	275.61	10,253.52	331.87	983.64	-220.89	0.23	0.07	56.23
10,453.00	0.13	326.11	10,326.52	331.96	983.42	-220.99	0.29	-0.19	69.18
Final Phoenix MWD Survey									
10,641.00	6.06	182.16	10,514.18	322.21	982.93	-211.36	3.28	3.15	-76.57
First BHI MWD Survey									
10,735.00	12.10	184.58	10,606.96	307.42	981.95	-196.77	6.44	6.43	2.57
10,737.78	12.35	183.84	10,609.68	306.83	981.91	-196.19	10.49	8.84	-26.68
FTP: 10737.78' MD, 12.35° Inc									
10,834.00	21.56	169.11	10,701.66	279.13	984.57	-168.37	10.49	9.58	-15.31
10,927.00	31.34	167.71	10,784.82	238.62	992.96	-127.18	10.54	10.52	-1.51
11,020.00	39.05	172.34	10,860.78	185.87	1,002.03	-73.74	8.77	8.29	4.98
11,114.00	45.36	168.02	10,930.39	123.73	1,012.93	-10.78	7.39	6.71	-4.60
11,207.00	55.98	165.79	10,989.25	53.80	1,029.31	60.53	11.57	11.42	-2.40
11,301.00	64.36	170.17	11,035.98	-25.88	1,046.14	141.59	9.79	8.91	4.66
11,396.00	70.43	175.56	11,072.50	-112.84	1,056.94	229.20	8.26	6.39	5.67
11,484.00	77.74	180.17	11,096.63	-197.32	1,060.02	313.51	9.71	8.31	5.24
11,577.00	82.96	178.81	11,112.21	-288.97	1,060.85	404.69	5.79	5.61	-1.46
11,671.00	88.06	179.22	11,119.57	-382.64	1,062.46	497.96	5.44	5.43	0.44
11,766.00	88.87	178.44	11,122.12	-477.58	1,064.40	592.53	1.18	0.85	-0.82
11,861.00	89.02	178.45	11,123.86	-572.53	1,066.97	687.18	0.16	0.16	0.01
11,956.00	88.56	178.47	11,125.87	-667.47	1,069.53	781.82	0.48	-0.48	0.02
12,050.00	88.71	178.53	11,128.11	-761.41	1,071.99	875.46	0.17	0.16	0.06
12,145.00	88.80	179.66	11,130.17	-856.38	1,073.49	970.01	1.19	0.09	1.19
12,240.00	88.37	179.78	11,132.52	-951.35	1,073.95	1,064.44	0.47	-0.45	0.13
12,335.00	89.48	179.77	11,134.30	-1,046.33	1,074.32	1,158.88	1.17	1.17	-0.01
12,430.00	88.40	179.65	11,136.06	-1,141.31	1,074.80	1,253.33	1.14	-1.14	-0.13



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Gold Log 4-9 Fed Com 74H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3822.00usft (H&P 423)
Site:	Gold Log 4-9 Fed Com	MD Reference:	RKB @ 3822.00usft (H&P 423)
Well:	Gold Log 4-9 Fed Com 74H	North Reference:	Grid
Wellbore:	OH / 73835	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 423)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,524.00	90.90	179.67	11,136.63	-1,235.30	1,075.36	1,346.80	2.66	2.66	0.02
12,619.00	90.96	179.78	11,135.09	-1,330.29	1,075.82	1,441.26	0.13	0.06	0.12
12,714.00	91.83	179.44	11,132.78	-1,425.25	1,076.46	1,535.71	0.98	0.92	-0.36
12,809.00	90.93	179.83	11,130.49	-1,520.22	1,077.07	1,630.16	1.03	-0.95	0.41
12,904.00	91.21	179.61	11,128.72	-1,615.21	1,077.53	1,724.61	0.37	0.29	-0.23
13,000.00	90.70	179.46	11,127.12	-1,711.19	1,078.31	1,820.09	0.55	-0.53	-0.16
13,189.00	90.82	179.25	11,124.61	-1,900.16	1,080.44	2,008.14	0.13	0.06	-0.11
13,284.00	90.15	179.29	11,123.81	-1,995.15	1,081.65	2,102.67	0.71	-0.71	0.04
13,379.00	89.99	179.00	11,123.69	-2,090.14	1,083.07	2,197.24	0.35	-0.17	-0.31
13,474.00	89.90	178.88	11,123.78	-2,185.12	1,084.82	2,291.83	0.16	-0.09	-0.13
13,569.00	89.93	178.84	11,123.92	-2,280.10	1,086.71	2,386.44	0.05	0.03	-0.04
13,664.00	90.42	179.01	11,123.63	-2,375.09	1,088.50	2,481.03	0.55	0.52	0.18
13,759.00	90.12	178.99	11,123.18	-2,470.07	1,090.15	2,575.61	0.32	-0.32	-0.02
13,854.00	89.31	178.92	11,123.66	-2,565.05	1,091.89	2,670.20	0.86	-0.85	-0.07
13,949.00	89.47	179.79	11,124.67	-2,660.04	1,092.96	2,764.73	0.93	0.17	0.92
14,044.00	88.57	179.20	11,126.29	-2,755.02	1,093.79	2,859.22	1.13	-0.95	-0.62
14,139.00	88.67	179.34	11,128.58	-2,849.99	1,095.00	2,953.73	0.18	0.11	0.15
14,234.00	92.46	179.55	11,127.64	-2,944.96	1,095.92	3,048.22	4.00	3.99	0.22
14,329.00	90.49	180.10	11,125.20	-3,039.92	1,096.21	3,142.63	2.15	-2.07	0.58
14,424.00	90.36	180.22	11,124.49	-3,134.92	1,095.95	3,237.02	0.19	-0.14	0.13
14,519.00	91.56	180.33	11,122.90	-3,229.90	1,095.49	3,331.36	1.27	1.26	0.12
14,614.00	91.29	180.33	11,120.54	-3,324.87	1,094.95	3,425.69	0.28	-0.28	0.00
14,709.00	91.60	180.43	11,118.14	-3,419.84	1,094.32	3,520.00	0.34	0.33	0.11
14,804.00	91.72	180.26	11,115.39	-3,514.80	1,093.74	3,614.31	0.22	0.13	-0.18
14,899.00	91.07	180.15	11,113.08	-3,609.77	1,093.40	3,708.66	0.69	-0.68	-0.12
14,993.00	89.50	180.12	11,112.61	-3,703.76	1,093.18	3,802.05	1.67	-1.67	-0.03
15,088.00	89.93	180.41	11,113.09	-3,798.76	1,092.74	3,896.42	0.55	0.45	0.31
15,183.00	88.51	179.93	11,114.38	-3,893.75	1,092.46	3,990.79	1.58	-1.49	-0.51
15,278.00	88.24	180.13	11,117.07	-3,988.71	1,092.41	4,085.16	0.35	-0.28	0.21
15,374.00	88.64	180.11	11,119.69	-4,084.68	1,092.21	4,180.51	0.42	0.42	-0.02
15,468.00	88.94	179.93	11,121.67	-4,178.65	1,092.18	4,273.91	0.37	0.32	-0.19
15,563.00	88.82	179.91	11,123.53	-4,273.64	1,092.31	4,368.32	0.13	-0.13	-0.02
15,658.00	90.73	180.17	11,123.90	-4,368.63	1,092.24	4,462.73	2.03	2.01	0.27
15,753.00	90.98	180.03	11,122.48	-4,463.62	1,092.08	4,557.11	0.30	0.26	-0.15
15,848.00	90.45	179.77	11,121.30	-4,558.61	1,092.24	4,651.54	0.62	-0.56	-0.27
15,943.00	88.30	179.88	11,122.33	-4,653.60	1,092.53	4,745.97	2.27	-2.26	0.12
16,038.00	87.90	179.74	11,125.48	-4,748.55	1,092.85	4,840.37	0.45	-0.42	-0.15
16,133.00	88.51	179.58	11,128.46	-4,843.50	1,093.41	4,934.80	0.66	0.64	-0.17
16,228.00	88.24	180.08	11,131.15	-4,938.46	1,093.69	5,029.21	0.60	-0.28	0.53
16,323.00	88.97	179.84	11,133.47	-5,033.43	1,093.76	5,123.60	0.81	0.77	-0.25
16,418.00	89.19	179.27	11,134.99	-5,128.42	1,094.50	5,218.09	0.64	0.23	-0.60
16,512.00	89.78	179.93	11,135.84	-5,222.41	1,095.15	5,311.57	0.94	0.63	0.70
16,607.00	89.16	179.42	11,136.72	-5,317.40	1,095.69	5,406.04	0.85	-0.65	-0.54



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Gold Log 4-9 Fed Com 74H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3822.00usft (H&P 423)
Site:	Gold Log 4-9 Fed Com	MD Reference:	RKB @ 3822.00usft (H&P 423)
Well:	Gold Log 4-9 Fed Com 74H	North Reference:	Grid
Wellbore:	OH / 73835	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 423)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
16,702.00	89.16	179.90	11,138.11	-5,412.39	1,096.26	5,500.51	0.51	0.00	0.51
16,796.00	89.78	179.60	11,138.98	-5,506.38	1,096.67	5,593.97	0.73	0.66	-0.32
16,891.00	89.62	180.25	11,139.47	-5,601.38	1,096.79	5,688.40	0.70	-0.17	0.68
16,986.00	89.75	180.00	11,140.00	-5,696.38	1,096.58	5,782.79	0.30	0.14	-0.26
17,081.00	89.81	179.91	11,140.36	-5,791.38	1,096.66	5,877.21	0.11	0.06	-0.09
17,176.00	90.61	180.06	11,140.01	-5,886.38	1,096.68	5,971.63	0.86	0.84	0.16
17,270.00	89.38	179.94	11,140.02	-5,980.38	1,096.68	6,065.05	1.31	-1.31	-0.13
17,365.00	89.93	180.22	11,140.59	-6,075.37	1,096.55	6,159.45	0.65	0.58	0.29
17,460.00	90.76	179.97	11,140.02	-6,170.37	1,096.39	6,253.84	0.91	0.87	-0.26
17,555.00	90.58	179.80	11,138.91	-6,265.36	1,096.58	6,348.27	0.26	-0.19	-0.18
17,649.00	88.94	180.10	11,139.30	-6,359.36	1,096.67	6,441.70	1.77	-1.74	0.32
Final BHI MWD Survey - Tie In									
17,782.00	89.84	180.74	11,140.72	-6,492.35	1,095.69	6,573.76	0.83	0.68	0.48
First Phoenix MWD Survey									
17,876.00	89.84	183.07	11,140.98	-6,586.29	1,092.57	6,666.78	2.48	0.00	2.48
17,971.00	89.71	186.52	11,141.36	-6,680.94	1,084.63	6,759.97	3.63	-0.14	3.63
18,066.00	87.67	184.62	11,143.53	-6,775.46	1,075.41	6,852.88	2.93	-2.15	-2.00
18,161.00	87.78	182.36	11,147.30	-6,870.20	1,069.63	6,946.40	2.38	0.12	-2.38
18,255.00	86.12	179.99	11,152.30	-6,964.04	1,067.70	7,039.45	3.08	-1.77	-2.52
18,350.00	85.55	177.40	11,159.20	-7,058.75	1,069.86	7,133.82	2.78	-0.60	-2.73
18,445.00	85.30	177.13	11,166.78	-7,153.34	1,074.38	7,228.33	0.39	-0.26	-0.28
18,540.00	85.84	176.16	11,174.12	-7,247.90	1,079.92	7,322.91	1.17	0.57	-1.02
18,635.00	90.96	174.44	11,176.77	-7,342.50	1,087.70	7,417.80	5.69	5.39	-1.81
18,730.00	94.06	173.19	11,172.61	-7,436.85	1,097.93	7,512.70	3.52	3.26	-1.32
18,825.00	92.05	173.50	11,167.55	-7,531.07	1,108.92	7,607.55	2.14	-2.12	0.33
18,920.00	92.55	174.28	11,163.73	-7,625.45	1,119.02	7,702.48	0.97	0.53	0.82
19,015.00	92.49	174.11	11,159.56	-7,719.87	1,128.62	7,797.38	0.19	-0.06	-0.18
19,109.00	92.24	175.36	11,155.68	-7,813.39	1,137.24	7,891.28	1.36	-0.27	1.33
19,204.00	87.90	177.90	11,155.56	-7,908.20	1,142.82	7,986.12	5.29	-4.57	2.67
19,299.00	90.69	182.91	11,156.73	-8,003.15	1,142.15	8,080.41	6.04	2.94	5.27
19,394.00	93.43	183.34	11,153.32	-8,097.94	1,136.98	8,174.04	2.92	2.88	0.45
19,489.00	92.19	182.99	11,148.66	-8,192.68	1,131.74	8,267.62	1.36	-1.31	-0.37
19,584.00	92.79	183.31	11,144.53	-8,287.44	1,126.52	8,361.23	0.72	0.63	0.34
19,679.00	90.91	184.08	11,141.47	-8,382.19	1,120.40	8,454.71	2.14	-1.98	0.81
19,774.00	90.62	184.77	11,140.20	-8,476.90	1,113.07	8,548.03	0.79	-0.31	0.73
19,869.00	90.49	185.02	11,139.28	-8,571.55	1,104.97	8,641.20	0.30	-0.14	0.26
19,964.00	89.35	184.69	11,139.41	-8,666.21	1,096.93	8,734.38	1.25	-1.20	-0.35
20,059.00	87.97	183.93	11,141.63	-8,760.91	1,089.79	8,827.71	1.66	-1.45	-0.80
20,153.00	89.78	184.65	11,143.48	-8,854.62	1,082.76	8,920.07	2.07	1.93	0.77
20,248.00	89.37	183.72	11,144.18	-8,949.37	1,075.83	9,013.46	1.07	-0.43	-0.98
20,343.00	88.70	182.68	11,145.78	-9,044.20	1,070.52	9,107.13	1.30	-0.71	-1.09
20,437.00	86.94	181.12	11,149.36	-9,138.08	1,067.41	9,200.08	2.50	-1.87	-1.66
20,532.00	86.17	179.90	11,155.07	-9,232.90	1,066.57	9,294.22	1.52	-0.81	-1.28
20,627.00	85.91	178.78	11,161.63	-9,327.66	1,067.66	9,388.53	1.21	-0.27	-1.18



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Gold Log 4-9 Fed Com 74H
Project:	Lea County, NM (NAD83-NME)	TVD Reference:	RKB @ 3822.00usft (H&P 423)
Site:	Gold Log 4-9 Fed Com	MD Reference:	RKB @ 3822.00usft (H&P 423)
Well:	Gold Log 4-9 Fed Com 74H	North Reference:	Grid
Wellbore:	OH / 73835	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (H&P 423)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
20,721.00	85.02	177.89	11,169.06	-9,421.33	1,070.38	9,481.92	1.34	-0.95	-0.95
20,816.00	87.19	178.24	11,175.51	-9,516.05	1,073.58	9,576.41	2.31	2.28	0.37
20,911.00	86.52	178.49	11,180.72	-9,610.87	1,076.29	9,670.94	0.75	-0.71	0.26
21,006.00	86.74	178.13	11,186.31	-9,705.66	1,079.08	9,765.46	0.44	0.23	-0.38
21,100.00	85.38	177.88	11,192.77	-9,799.38	1,082.35	9,858.97	1.47	-1.45	-0.27
21,195.00	83.33	177.16	11,202.11	-9,893.82	1,086.44	9,953.28	2.29	-2.16	-0.76
21,279.00	82.88	176.58	11,212.20	-9,977.09	1,090.99	10,036.54	0.87	-0.54	-0.69
Final Phoenix MWD Survey									
21,351.82	82.88	176.58	11,221.22	-10,049.22	1,095.30	10,108.71	0.00	0.00	0.00
LTP: 21351.82' MD									
21,395.00	82.88	176.58	11,226.57	-10,091.99	1,097.86	10,151.50	0.00	0.00	0.00
Projection to TD									

Design Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
974.00	973.98	-6.24	-0.25	Tie In
1,088.00	1,087.97	-6.89	-0.17	First Phoenix MWD Survey
10,453.00	10,326.52	331.96	983.42	Final Phoenix MWD Survey
10,641.00	10,514.18	322.21	982.93	First BHI MWD Survey
10,737.78	10,609.68	306.83	981.91	FTP: 10737.78' MD, 12.35° Inc
17,649.00	11,139.30	-6,359.36	1,096.67	Final BHI MWD Survey
17,649.00	11,139.30	-6,359.36	1,096.67	Tie In
17,782.00	11,140.72	-6,492.35	1,095.69	First Phoenix MWD Survey
21,279.00	11,212.20	-9,977.09	1,090.99	Final Phoenix MWD Survey
21,351.82	11,221.22	-10,049.22	1,095.30	LTP: 21351.82' MD
21,395.00	11,226.57	-10,091.99	1,097.86	Projection to TD

Well Name: GOLD LOG 4-*9 FEDERAL COM

Well Location: T22S / R32E / SEC 4 / LOT 2 / 32.4268587 / -103.6763017

County or Parish/State: LEA / NM

Well Number: 74H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM104687

Unit or CA Name:

Unit or CA Number:

US Well Number: 300255219100X1

Operator: OXY USA INCORPORATED

Subsequent Report

Sundry ID: 2785302

Type of Submission: Subsequent Report

Date Sundry Submitted: 04/16/2024

Date Operation Actually Began: 03/28/2024

Type of Action: Drilling Operations

Time Sundry Submitted: 12:16

Actual Procedure: RUPU 03/28/24. RIH & clean out to PBTD @ 21350'M/11212'V. Pressure test casing to 6000# for 30 min, good test. RIH & perf @ 11395'-21270'. Total 2403 holes. Frac in 36 stages w/ 352632BBL Produced Water + 0BBL Brackish Water (> 1,000 mg/l TDS and 10,000 mg/l TDS) w/ 24665970# sand. RD frac 04/05/24. RDCT, well ready to produce 04/10/24. OXY USA Inc. requests a tubing exception while continuing to flow back this well. The estimated date of tubing install is 06/15/2024.

Well Name: GOLD LOG 4-*9 FEDERAL COM	Well Location: T22S / R32E / SEC 4 / LOT 2 / 32.4268587 / -103.6763017	County or Parish/State: LEA / NM
Well Number: 74H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM104687	Unit or CA Name:	Unit or CA Number:
US Well Number: 300255219100X1	Operator: OXY USA INCORPORATED	

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: LESLIE REEVES	Signed on: APR 16, 2024 12:16 PM
Name: OXY USA INCORPORATED	
Title: Advisor Regulatory	
Street Address: 5 GREENWAY PLAZA, SUITE 110	
City: HOUSTON	State: TX
Phone: (713) 497-2492	
Email address: LESLIE_REEVES@OXY.COM	

Field


Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: JONATHON W SHEPARD	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 04/17/2024
Signature: Jonathon Shepard	

Submit To Appropriate District Office Two Copies District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505				Form C-105 Revised April 3, 2017				
1. WELL API NO. 30-025-52191										
2. Type of Lease ☐ STATE ☐ FEE ☒ FED/INDIAN										
3. State Oil & Gas Lease No.										
WELL COMPLETION OR RECOMPLETION REPORT AND LOG										
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)						5. Lease Name or Unit Agreement Name GOLD LOG 4-9 FEDERAL COM				
						6. Well Number: #074H				
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER										
8. Name of Operator OXY USA INC.						9. OGRID 16696				
10. Address of Operator 5 GREENWAY PLAZA, SUITE 110, HOUSTON TX 77046						11. Pool name or Wildcat BILBREY BASIN; BONE SPRING				
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	B	4	22S	32E	2	396	NORTH	1585	EAST	LEA
BH:	P	9	22S	32E		57	SOUTH	561	EAST	LEA
13. Date Spudded 11/18/2023	14. Date T.D. Reached 01/28/2024	15. Date Rig Released 01/30/2024			16. Date Completed (Ready to Produce) 04/10/2024			17. Elevations (DF and RKB, RT, GR, etc.) 3796'GL		
18. Total Measured Depth of Well 21395'M/11212'V			19. Plug Back Measured Depth 21350'M/11212'V			20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run GR, CBL		
22. Producing Interval(s), of this completion - Top, Bottom, Name 11395'-21270'; 2ND BONE SPRING										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
13-3/8"		54.5# J-55 BTC		1020'		17-1/2"		1300sx- TOC Surf		
7-5/8"		26.4# HCL-80 BTC		10561'		9-7/8"		4293sx-TOC Surf		
5-1/2"		20# P-110 ICY		21375'		6-3/4"		650sx- TOC~7804'		
24. LINER RECORD										
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	25. TUBING RECORD					
					SIZE	DEPTH SET	PACKER SET			
					2-3/8"	11217'				
26. Perforation record (interval, size, and number) 11395'-21270'; 0.42, total 2403 holes					27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.					
					DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED			
					11395'-21270';		352632BBL Produced Water + 0BBL			
							Brackish Water w/ 24665970# sand			
28. PRODUCTION										
Date First Production 04/13/2024		Production Method (Flowing, gas lift, pumping - Size and type pump) FLOWING				Well Status (Prod. or Shut-in) PROD				
Date of Test 04/24/2024	Hours Tested 24 HOURS	Choke Size	Prod'n For Test Period	Oil - Bbl 1603	Gas - MCF 2914	Water - Bbl. 3817	Gas - Oil Ratio			
Flow Tubing Press.	Casing Pressure 545	Calculated 24-Hour Rate	Oil - Bbl. 1603	Gas - MCF 2914	Water - Bbl. 3817	Oil Gravity - API - (Corr.)				
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD							30. Test Witnessed By			
31. List Attachments GR, CBL, DIRECTIONAL, AS-DRILLED C-102, COMP SUNDRY										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.							33. Rig Release Date:			
34. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Signature <i>Leslie T. Reeves</i>		Printed Name LESLIE REEVES		Title REGULATORY MANAGER			Date 6/5/2024			
E-mail Address LESLIE_REEVES@OXY.COM										

OXY USA Inc.
GOLD LOG 4-9 FEDERAL COM 74H
API No. 30-025-52191

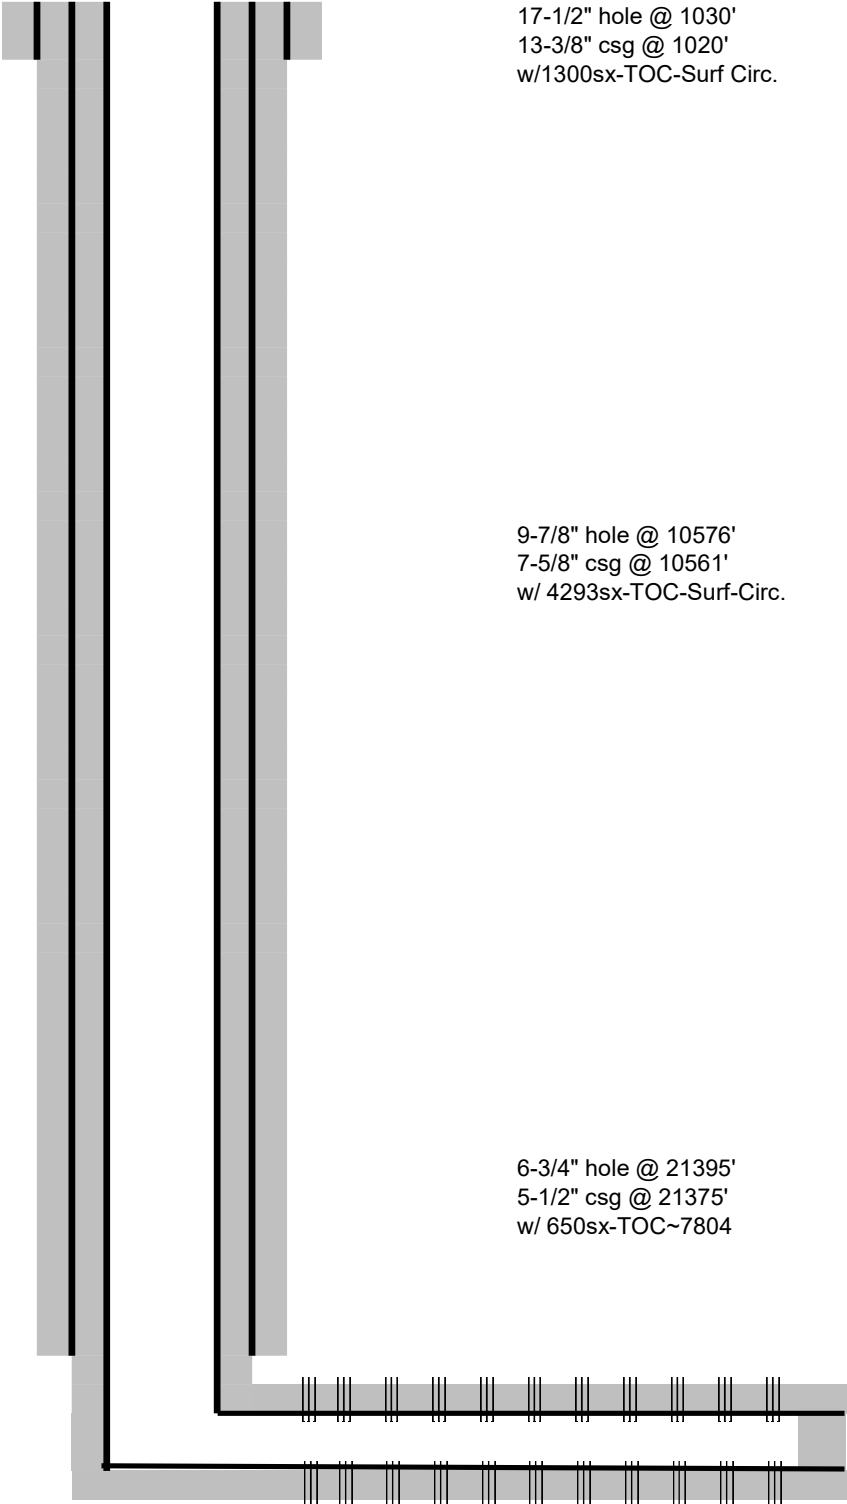

Perfs @ 11395'-21270'

TD- 21395'M/11212'V

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 351891

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 351891
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 351891

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 351891
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
smcgrath	File 3160-4 within 10 days of BLM Approval.	11/15/2024