

C-104 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024
--	---	----------------------

REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

Section 1 - Operator and Well Information

Submittal Type: ☐ Test Allowable (C-104RT) ☒ New Well (C-104NW) ☐ Recomplete (C-104RC) ☐ Pay Add (C-104RC) ☐ Amended	
Operator Name: OXY USA INC	OGRID: 16696
Property Name and Well Number: OLIVE WON UNIT 135H	Property Code: 336102
Mineral Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal	API Number: 30-0 15-54755
Pool Name: WC 22S31E13; Wolfcamp	Pool Code: 98351

Section 2 – Surface Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
P	25	22S	31E		652' FSL	1117' FEL	32.35698192	-103.72654813	EDDY

Section 3 – Completion Information

Producing Method	Ready Date	Perforations MD	Perforations TVD
Gas lift	06/24/24	12102-22016'MD	11907-11881'TVD

Section 4 – Action IDs for Submissions and Order Numbers

List Action IDs for Drilling Sundries	Was an Order required / needed (Y/N), if yes list Order number:
C-104 RT Action ID (if C-104NW):	Communitization Agreement ☐ Yes ☒ No, Order No.
Surface Casing Action ID: 348958	Unit: ☒ Yes ☐ No, Order No. NMNM106319137
Intermediate 1 Casing Action ID: 348958	Compulsory Pooling: ☐ Yes ☒ No, Order No.
Intermediate 2 Casing Action ID: NA	Down Hole Commingling: ☐ Yes ☒ No, Order No.
Production Casing Action ID: 348958	Surface Commingling: ☒ Yes ☐ No, Order No. PLC-844-D
All casing was pressure tested in accordance with NMAC ☒ Yes ☐ No	Non-standard Location: ☐ Yes ☒ No ☐ Common ownership Order No.
Liner 1 Action ID: NA	Non-standard Proration: ☐ Yes ☒ No, Order No.
Casing was installed prior to OCD's Action ID system (Y/N): N	Simultaneous Dedication: ☐ Yes ☒ No, Order No.

Section 5 - Operator Signature and Certification

☒ I hereby certify that the required Water Use Report has been, or will be, submitted for this well's completion.	
☒ I hereby certify that the required Fracfocus disclosure has been, or will be, submitted for this well's completion.	
☒ I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.	
Name Jana Mendiola	<i>Jana Mendiola</i>
Title Regulatory Advisor	Date 09/09/24

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals, & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024
	Submittal Type: ☐ Initial Submittal ☐ Amended Report ☒ As Drilled	

WELL LOCATION INFORMATION

API Number 30-015-54755	Pool Code 98351	Pool Name WC 22S31E13; Wolfcamp
Property Code 336102	Property Name OLIVE WON UNIT	Well Number 135H
OGRID No. 16696	Operator Name OXY USA INC.	Ground Level Elevation 3546'
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal

Surface Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude (NAD83)	Longitude (NAD83)	County
P	25	22S	31E		652' FSL	1117' FEL	32.35698192	-103.72654813	EDDY

Bottom Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude (NAD83)	Longitude (NAD83)	County
A	24	22S	31E		56' FNL	949' FEL	32.38408972	-103.72602081	EDDY

Dedicated Acres 320.00	Infill or Defining Well	Defining Well API	Overlapping Spacing Unit (Y/N)	Consolidation Code
Order Numbers:			Well setbacks are under Common Ownership: ☐ Yes ☐ No	

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude (NAD83)	Longitude (NAD83)	County
P	25	22S	31E		112' FSL	1032' FEL	32.35549741	-103.72627140	EDDY

First Take Point (FTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude (NAD83)	Longitude (NAD83)	County
P	25	22S	31E		501' FSL	1030' FEL	32.35656683	-103.72626691	EDDY

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude (NAD83)	Longitude (NAD83)	County
A	24	22S	31E		182' FNL	948' FEL	32.38374337	-103.72602005	EDDY

Unitized Area or Area of Uniform Interest	Spacing Unit Type: ☒ Horizontal ☐ Vertical	Ground Floor Elevation 3546'
---	---	---------------------------------

OPERATOR CERTIFICATIONS

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

Jana Mendiola 09/05/2024
Signature Date

JANA MENDIOLA
Printed Name

janalyn_mendiola@oxy.com
Email Address

SURVEYOR CERTIFICATIONS

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Data used for underground measurements were provided by others for reference only and does not constitute field measurements performed by Delta Field Services



Signature and Seal of Professional Surveyor

Certificate Number 21653	Date of Survey AUGUST 09, 2024
-----------------------------	-----------------------------------

ACREAGE DEDICATION PLATS

NOW I WON 25_24 FED COM 35H

BHL (NAD83)
X:728809.62' / Y:503995.51'
LAT:32.38408972 / LON:-103.72602081

BHL (NAD27)
X:687627.25' / Y:503935.09'
LAT:32.38396705 / LON:-103.72553221

LTP (NAD83)
X:728810.57' / Y:503869.51'
LAT:32.38374337 / LON:-103.72602005

LTP (NAD27)
X:687628.19' / Y:503809.10'
LAT:32.38362070 / LON:-103.72553146

PPP-1 (NAD83)
X:728818.22' / Y:498771.87'
LAT:32.36973144 / LON:-103.72608899

PPP-1 (NAD27)
X:687635.70' / Y:498711.59'
LAT:32.36960870 / LON:-103.72560095

FTP (NAD83)
X:728790.45' / Y:493982.30'
LAT:32.35656683 / LON:-103.72626691

FTP (NAD27)
X:687607.79' / Y:493922.15'
LAT:32.35644402 / LON:-103.72577939


KOP (NAD83)
X:728791.27' / Y:493593.24'
LAT:32.35549741 / LON:-103.72627140

KOP (NAD27)
X:687608.60' / Y:493533.10'
LAT:32.35537460 / LON:-103.72578392

SHL (NAD83)
X:728702.76' / Y:494132.82'
LAT:32.35698192 / LON:-103.72654813

SHL (NAD27)
X:687520.10' / Y:494072.66'
LAT:32.35685912 / LON:-103.72606058

CORNER COORDINATES NAD 83, SPCS NM EAST	CORNER COORDINATES NAD 27, SPCS NM EAST
A - X: 729757.89' / Y: 504056.71'	A - X: 688575.51' / Y: 503996.29'
B - X: 729772.30' / Y: 501414.79'	B - X: 688589.85' / Y: 501354.44'
C - X: 729786.86' / Y: 498775.98'	C - X: 688604.33' / Y: 498715.70'
D - X: 729824.17' / Y: 493482.52'	D - X: 688641.49' / Y: 493422.39'
E - X: 728503.11' / Y: 493480.62'	E - X: 687320.44' / Y: 493420.48'
F - X: 728466.38' / Y: 498770.37'	F - X: 687283.86' / Y: 498710.09'
G - X: 728436.32' / Y: 504049.62'	G - X: 687253.96' / Y: 503989.20'

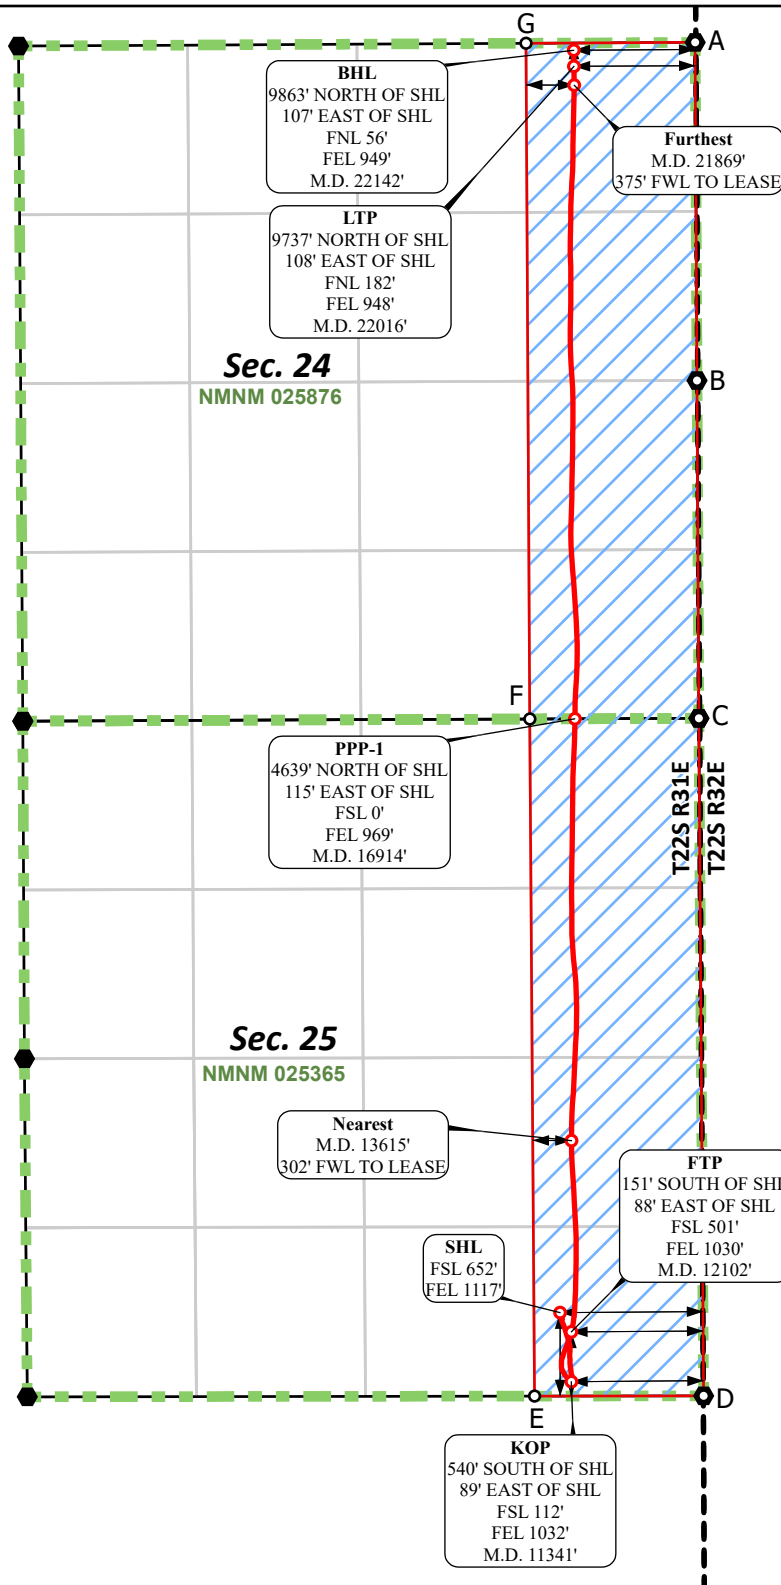

*FTP TO LTP LEASE DISTANCES

FEDERAL LEASE ID	LENGTH
NMNM025365	4795.70'
NMNM025876	5101.08'
TOTAL	9896.78'



○ Drill Line Events ● Section Corners — Drill Line — Dimension Lines — Federal Leases — HSU ○ HSU Corners

All bearings and coordinates refer to New Mexico State Plane Coordinate System, East Zone, U.S. Survey Feet.


JOB No. OXY_0008_NW01
REV 1 NDS 8/6/2024

Distances/areas relative to NAD 83 grid measurements. Combined Scale Factor: 0.99978405 and a Convergence Angle: 0.31759444°





Project: Eddy County, NM (NAD83-NME)
Site: Now I Won 25_24
Well: Now I Won 25_24 Fed Com 35H
Wellbore: OH / 74282
Design: Plan 3 04-25-24
Rig: Citadel 3

PHOENIX
TECHNOLOGY SERVICES

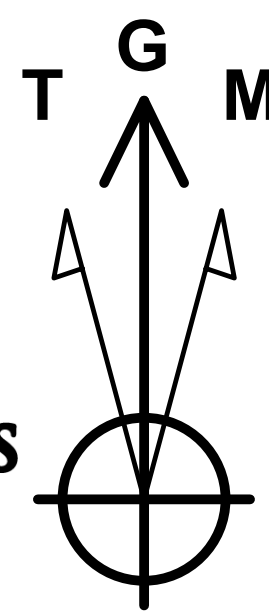

Azimuths to Grid North
True North: -0.32°
Magnetic North: 6.25°

Magnetic Field
Strength: 47601.7nT
Dip Angle: 60.00°
Date: 3/28/2024
Model: IFR

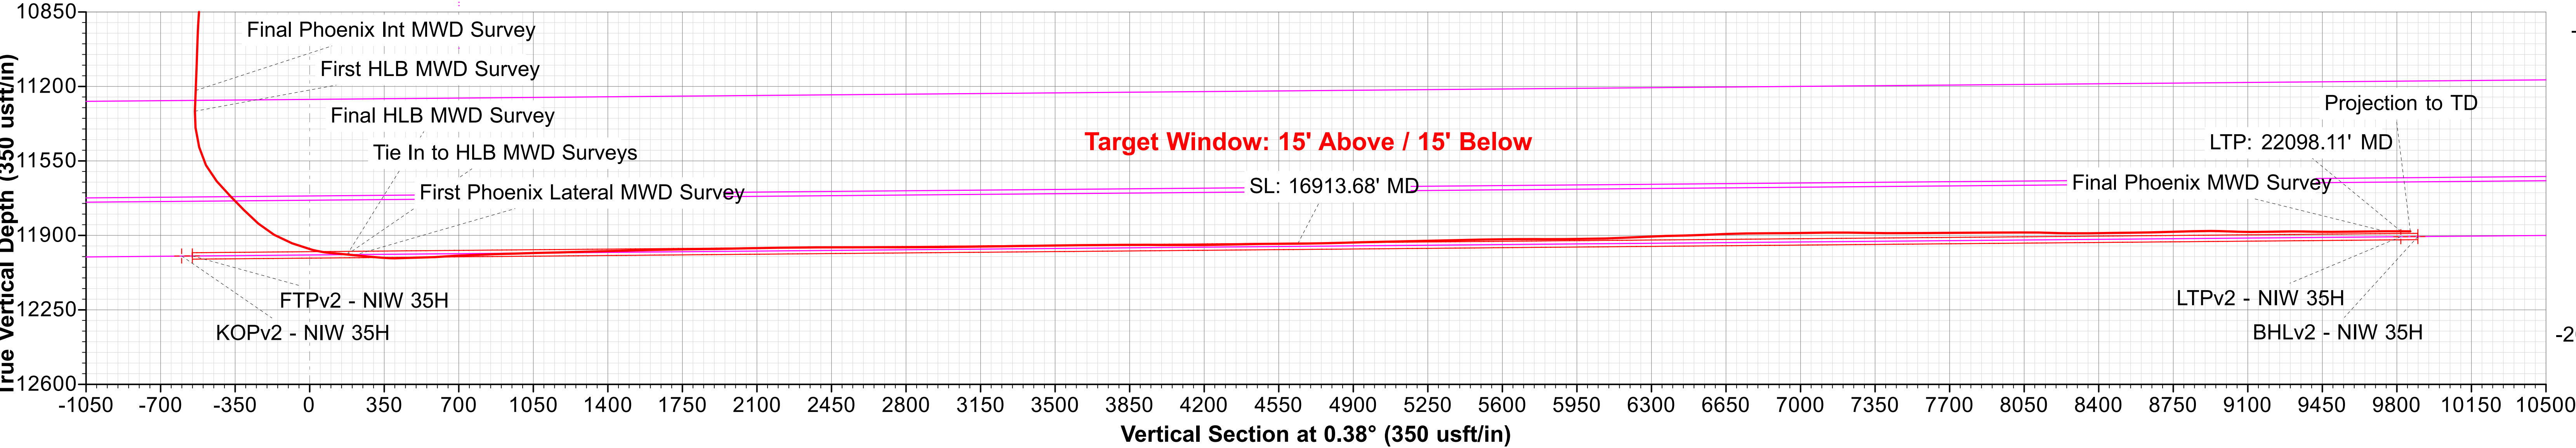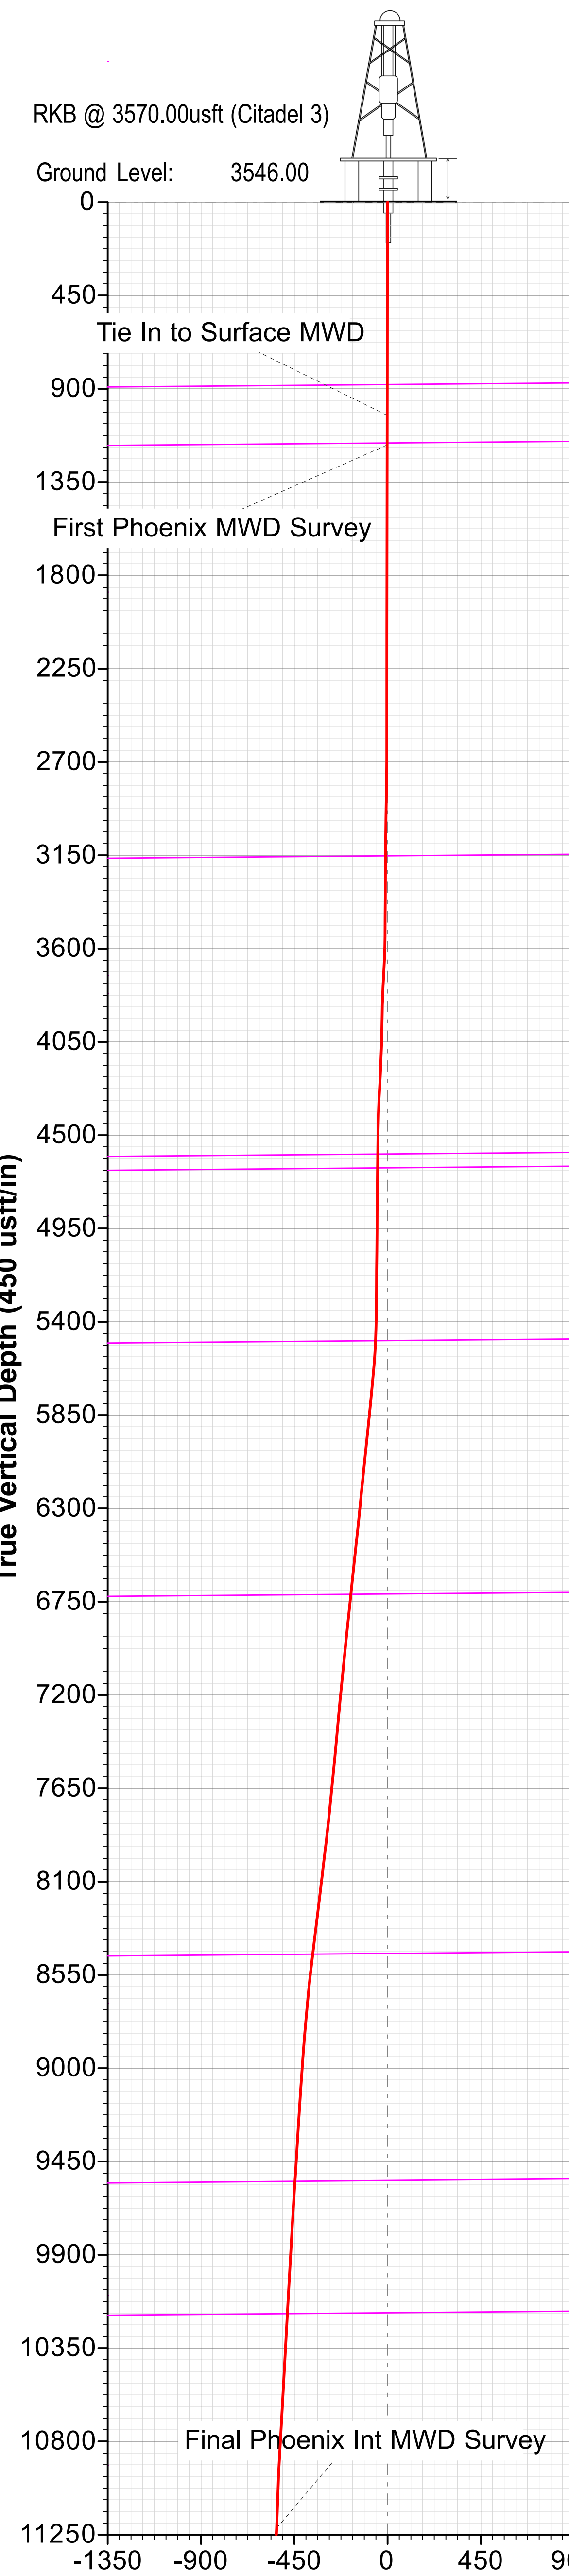

WELL DETAILS									
		Ground Level:		3546.00					
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude				
0.00	0.00	494132.82	728702.76	32° 21' 25.134946 N	103° 43' 35.573227 W				

SECTION DETAILS									
MD	Inc	Azi	TVD	+N/-S	+E/-W	VSect	Departure	Annotation	
1028.00	0.01	294.93	1027.95	-1.72	6.31	-1.68	7.33	Tie In to Surface MWD	
1171.00	0.24	255.04	1170.95	-1.79	6.01	-1.75	7.65	First Phoenix MWD Survey	
11243.00	2.82	209.87	11218.95	-535.65	91.73	-535.04	568.80	Final Phoenix Int MWD Survey	
11341.00	3.19	227.66	11316.81	-539.58	88.51	-538.98	573.94	First HLB MWD Survey	
12444.00	84.59	1.77	11990.10	175.33	120.20	176.12	1337.25	Final HLB MWD Survey	
12444.00	84.59	1.77	11990.10	175.33	120.20	176.12	1337.25	Tie In to HLB MWD Surveys	
12477.00	84.27	1.73	11993.31	208.16	121.20	208.95	1370.09	First Phoenix Lateral MWD Survey	
16913.68	90.72	0.83	11939.15	4639.04	115.46	4639.70	5805.05	SL: 16913.68' MD	
22024.00	89.82	359.59	11880.93	9744.69	107.71	9745.19	10914.31	Final Phoenix MWD Survey	
22098.11	89.82	359.59	11881.17	9818.80	107.18	9819.30	10988.42	LTP: 22098.11' MD	
22142.00	89.82	359.59	11881.30	9862.69	106.86	9863.18	11032.31	Projection to TD	

FORMATION TOP DETAILS		
TVDPath	MDPath	Formation
880.01	880.06	RUSTLER
1162.02	1162.06	SALADO
3153.09	3153.21	CASTLE
4591.41	4592.46	DELAWARE
4658.42	4659.48	BELL CANYON
5491.50	5492.67	CHERRY CANYON
6714.54	6722.34	BRUSHY CANYON
8450.15	8468.12	BONE SPRING
9545.90	9567.42	BONE SPRING 1ST
10184.21	10206.79	BONE SPRING 2ND
11265.69	11289.80	BONE SPRING 3RD
11718.25	11801.60	WOLFCAMP
11738.08	11830.02	WOLFCAMP
11990.48	12445.31	11992' TVD @ 0° VS 90.5° INC

Map System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone Name: New Mexico Eastern Zone


Local Origin: Well Now I Won 25_24 Fed Com 35H, Grid North

Latitude: 32° 21' 25.134946 N
Longitude: 103° 43' 35.573227 W

Grid East: 728702.76
Grid North: 494132.82
Scale Factor: 1.000

Geomagnetic Model: IFR
Sample Date: 28-Mar-24
Magnetic Declination: 6.574°
Dip Angle from Horizontal: 60.003°
Magnetic Field Strength: 47601.70000000nT

To convert a Magnetic Direction to a Grid Direction, Add 6.249°
To convert a Magnetic Direction to a True Direction, Add 6.574° East
To convert a True Direction to a Grid Direction, Subtract 0.325°

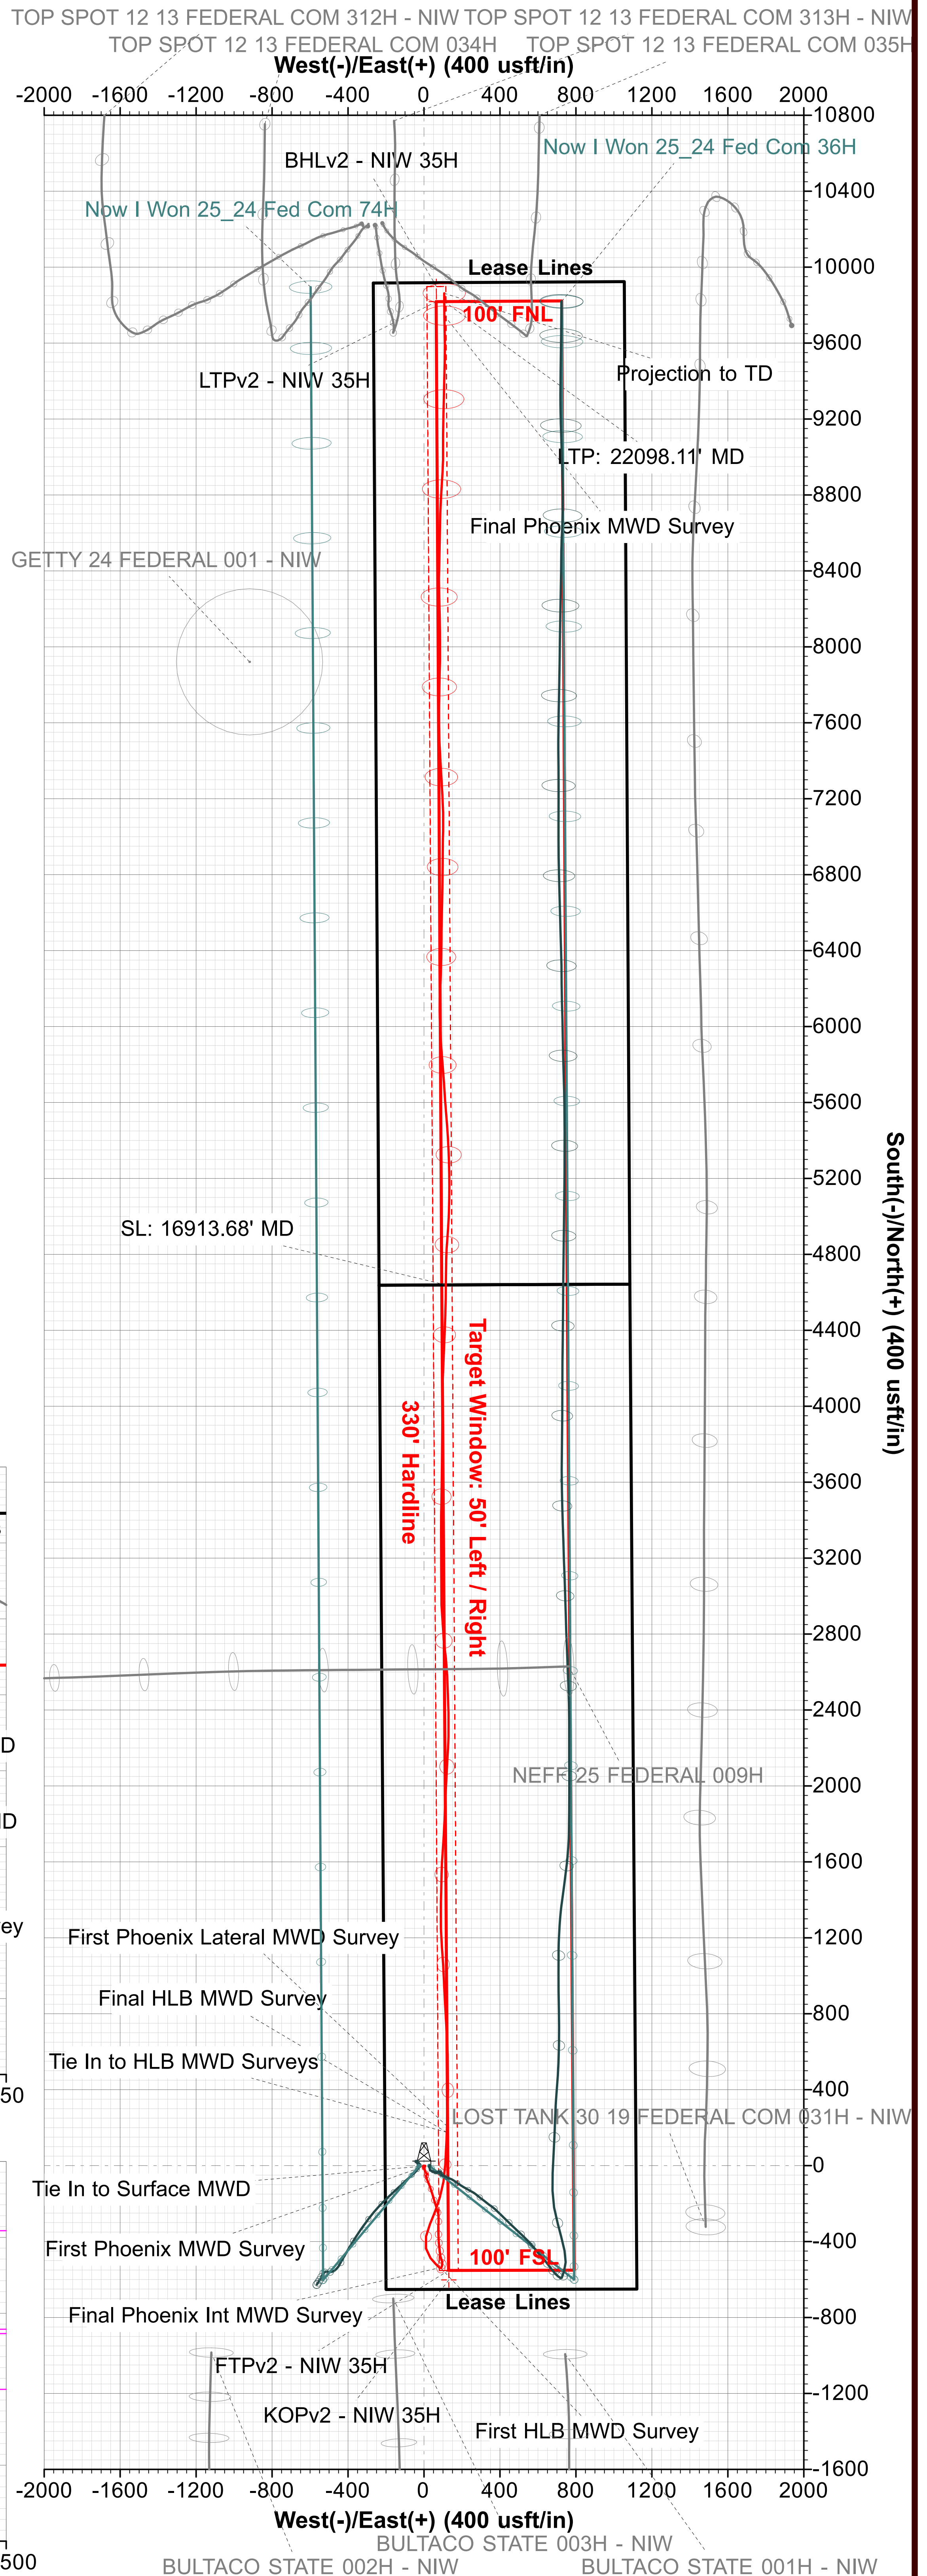



OXY USA INC.

Eddy County, NM (NAD83-NME)

Now I Won 25_24

Now I Won 25_24 Fed Com 35H

OH / 74282

Design: Surveys (Citadel 3)

Standard Survey Report

25 June, 2024





Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Now I Won 25_24 Fed Com 35H
Project:	Eddy County, NM (NAD83-NME)	TVD Reference:	RKB @ 3570.00usft (Citadel 3)
Site:	Now I Won 25_24	MD Reference:	RKB @ 3570.00usft (Citadel 3)
Well:	Now I Won 25_24 Fed Com 35H	North Reference:	Grid
Wellbore:	OH / 74282	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Citadel 3)	Database:	USAEDMDB

Project	Eddy County, NM (NAD83-NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Now I Won 25_24		
Site Position:		Northing:	494,132.79 usft
From:	Map	Easting:	726,591.88 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 21' 25.252377 N
		Longitude:	103° 44' 0.182082 W

Well	Now I Won 25_24 Fed Com 35H		
Well Position	+N/-S	0.00 usft	Northing: 494,132.82 usft
	+E/-W	0.00 usft	Easting: 728,702.76 usft
Position Uncertainty	2.00 usft	Wellhead Elevation:	usft
Grid Convergence:	0.325 °	Ground Level:	3,546.00 usft

Wellbore	OH / 74282				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IFR	3/28/2024	6.574	60.003	47,601.70000000

Design	Surveys (Citadel 3)				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	0.38	

Survey Program	Date	6/25/2024			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
24.00	1,028.00	SDT MWD Surveys - Adj Surface (OH / 74	SQC_C712Mb_MWD+HR MWD+HRGM+Sag+FDIR		
1,171.00	11,243.00	Phoenix MWD Surveys - Int - SQC (OH / 7	SQC_C705Mb_MWD+IFF MWD+IFR1+Sag+FDIR		
11,341.00	12,444.00	HLB MWD Surveys - Curve - SQC (OH / 7	SQC_C705Mb_MWD+IFF MWD+IFR1+Sag+FDIR		
12,477.00	22,142.00	Phoenix MWD Surveys - Prod - SQC (OH	SQC_C705Mb_MWD+IFF MWD+IFR1+Sag+FDIR		

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
24.00	0.00	0.00	24.00	0.00	0.00	0.00	0.00	0.00	0.00	
144.00	0.68	108.59	144.00	-0.23	0.67	-0.22	0.57	0.57	0.00	
231.00	0.84	106.15	230.99	-0.57	1.78	-0.56	0.19	0.18	-2.80	
318.00	1.02	104.59	317.98	-0.94	3.14	-0.92	0.21	0.21	-1.79	
405.00	0.93	101.52	404.97	-1.28	4.58	-1.25	0.12	-0.10	-3.53	
491.00	0.69	96.70	490.96	-1.48	5.78	-1.44	0.29	-0.28	-5.60	



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Now I Won 25_24 Fed Com 35H
Project:	Eddy County, NM (NAD83-NME)	TVD Reference:	RKB @ 3570.00usft (Citadel 3)
Site:	Now I Won 25_24	MD Reference:	RKB @ 3570.00usft (Citadel 3)
Well:	Now I Won 25_24 Fed Com 35H	North Reference:	Grid
Wellbore:	OH / 74282	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Citadel 3)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
577.00	0.05	212.88	576.95	-1.57	6.27	-1.53	0.83	-0.74	135.09
665.00	0.16	335.62	664.95	-1.49	6.20	-1.45	0.22	0.13	139.48
751.00	0.05	233.06	750.95	-1.40	6.12	-1.36	0.21	-0.13	-119.26
838.00	0.07	140.76	837.95	-1.47	6.12	-1.43	0.10	0.02	-106.09
925.00	0.10	99.20	924.95	-1.52	6.23	-1.48	0.08	0.03	-47.77
1,011.00	0.21	177.27	1,010.95	-1.69	6.31	-1.65	0.25	0.13	90.78
1,028.00	0.01	294.93	1,027.95	-1.72	6.31	-1.68	1.26	-1.18	692.12
Tie In to Surface MWD									
1,171.00	0.24	255.04	1,170.95	-1.79	6.01	-1.75	0.16	0.16	-27.90
First Phoenix MWD Survey									
1,266.00	0.14	243.87	1,265.95	-1.89	5.72	-1.86	0.11	-0.11	-11.76
1,360.00	0.12	260.29	1,359.95	-1.96	5.52	-1.93	0.04	-0.02	17.47
1,455.00	0.20	225.63	1,454.95	-2.09	5.30	-2.06	0.13	0.08	-36.48
1,550.00	0.15	236.86	1,549.95	-2.28	5.08	-2.24	0.06	-0.05	11.82
1,645.00	0.18	250.02	1,644.95	-2.40	4.83	-2.37	0.05	0.03	13.85
1,740.00	0.25	243.88	1,739.95	-2.54	4.51	-2.51	0.08	0.07	-6.46
1,835.00	0.19	239.18	1,834.95	-2.71	4.19	-2.68	0.07	-0.06	-4.95
1,929.00	0.23	247.06	1,928.95	-2.86	3.88	-2.84	0.05	0.04	8.38
2,024.00	0.30	241.44	2,023.95	-3.06	3.48	-3.04	0.08	0.07	-5.92
2,119.00	0.37	246.15	2,118.95	-3.30	2.99	-3.28	0.08	0.07	4.96
2,214.00	0.37	256.41	2,213.95	-3.50	2.41	-3.48	0.07	0.00	10.80
2,309.00	0.56	262.40	2,308.94	-3.63	1.65	-3.62	0.21	0.20	6.31
2,403.00	0.55	269.30	2,402.94	-3.70	0.74	-3.69	0.07	-0.01	7.34
2,498.00	0.49	280.99	2,497.93	-3.62	-0.11	-3.63	0.13	-0.06	12.31
2,593.00	0.70	278.64	2,592.93	-3.46	-1.09	-3.47	0.22	0.22	-2.47
2,688.00	0.41	242.28	2,687.92	-3.53	-1.96	-3.54	0.47	-0.31	-38.27
2,783.00	0.93	167.41	2,782.92	-4.44	-2.09	-4.46	0.96	0.55	-78.81
2,878.00	1.02	163.59	2,877.91	-6.01	-1.69	-6.02	0.12	0.09	-4.02
2,973.00	0.98	166.18	2,972.89	-7.61	-1.25	-7.61	0.06	-0.04	2.73
3,068.00	0.74	167.43	3,067.88	-8.99	-0.93	-9.00	0.25	-0.25	1.32
3,163.00	0.53	184.42	3,162.87	-10.03	-0.83	-10.04	0.29	-0.22	17.88
3,257.00	0.30	171.15	3,256.87	-10.71	-0.82	-10.71	0.26	-0.24	-14.12
3,352.00	0.11	143.98	3,351.87	-11.03	-0.73	-11.03	0.22	-0.20	-28.60
3,447.00	0.22	184.87	3,446.87	-11.28	-0.69	-11.29	0.16	0.12	43.04
3,542.00	0.55	181.20	3,541.87	-11.92	-0.72	-11.92	0.35	0.35	-3.86
3,637.00	2.38	159.29	3,636.83	-14.22	-0.03	-14.22	1.98	1.93	-23.06
3,731.00	3.96	148.26	3,730.69	-18.81	2.37	-18.79	1.79	1.68	-11.73
3,921.00	1.00	182.78	3,920.50	-26.04	5.74	-26.01	1.68	-1.56	18.17
4,016.00	1.24	171.68	4,015.48	-27.89	5.85	-27.85	0.34	0.25	-11.68
4,111.00	2.37	154.32	4,110.43	-30.68	6.85	-30.63	1.31	1.19	-18.27
4,300.00	4.11	142.86	4,299.12	-39.60	12.63	-39.51	0.98	0.92	-6.06
4,395.00	1.98	151.01	4,393.98	-43.75	15.48	-43.65	2.28	-2.24	8.58
4,490.00	0.78	195.81	4,488.96	-45.81	16.10	-45.70	1.61	-1.26	47.16
4,584.00	0.78	216.85	4,582.95	-46.93	15.55	-46.83	0.30	0.00	22.38



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Now I Won 25_24 Fed Com 35H
Project:	Eddy County, NM (NAD83-NME)	TVD Reference:	RKB @ 3570.00usft (Citadel 3)
Site:	Now I Won 25_24	MD Reference:	RKB @ 3570.00usft (Citadel 3)
Well:	Now I Won 25_24 Fed Com 35H	North Reference:	Grid
Wellbore:	OH / 74282	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Citadel 3)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,679.00	0.77	214.17	4,677.94	-47.98	14.80	-47.88	0.04	-0.01	-2.82
4,774.00	0.74	211.95	4,772.93	-49.03	14.12	-48.93	0.04	-0.03	-2.34
4,869.00	0.67	205.86	4,867.92	-50.05	13.55	-49.96	0.11	-0.07	-6.41
4,963.00	0.57	219.14	4,961.92	-50.91	13.01	-50.82	0.19	-0.11	14.13
5,058.00	0.52	210.96	5,056.91	-51.64	12.49	-51.56	0.10	-0.05	-8.61
5,153.00	0.56	228.48	5,151.91	-52.32	11.92	-52.24	0.18	0.04	18.44
5,248.00	0.66	226.13	5,246.90	-53.01	11.18	-52.93	0.11	0.11	-2.47
5,342.00	0.72	178.19	5,340.90	-53.97	10.81	-53.90	0.60	0.06	-51.00
5,437.00	1.70	168.17	5,435.88	-55.95	11.12	-55.87	1.05	1.03	-10.55
5,532.00	2.89	167.41	5,530.80	-59.66	11.93	-59.58	1.25	1.25	-0.80
5,627.00	5.52	159.41	5,625.53	-66.28	14.06	-66.19	2.83	2.77	-8.42
5,722.00	5.77	158.57	5,720.07	-75.00	17.41	-74.89	0.28	0.26	-0.88
5,817.00	6.08	157.94	5,814.57	-84.11	21.05	-83.97	0.33	0.33	-0.66
5,911.00	6.34	159.23	5,908.01	-93.58	24.76	-93.41	0.31	0.28	1.37
6,006.00	6.35	158.96	6,002.43	-103.38	28.50	-103.19	0.03	0.01	-0.28
6,101.00	6.24	159.98	6,096.86	-113.14	32.16	-112.92	0.17	-0.12	1.07
6,196.00	6.16	161.18	6,191.30	-122.81	35.57	-122.58	0.16	-0.08	1.26
6,291.00	6.01	162.01	6,285.77	-132.37	38.75	-132.11	0.18	-0.16	0.87
6,386.00	6.13	161.97	6,380.24	-141.92	41.85	-141.64	0.13	0.13	-0.04
6,480.00	6.36	162.44	6,473.68	-151.66	44.98	-151.36	0.25	0.24	0.50
6,670.00	6.29	163.39	6,662.52	-171.67	51.13	-171.33	0.07	-0.04	0.50
6,765.00	6.26	164.50	6,756.95	-181.64	54.00	-181.28	0.13	-0.03	1.17
6,955.00	6.19	162.53	6,945.83	-201.40	59.84	-201.00	0.12	-0.04	-1.04
7,144.00	5.89	163.04	7,133.78	-220.39	65.73	-219.95	0.16	-0.16	0.27
7,239.00	5.77	163.78	7,228.29	-229.64	68.49	-229.18	0.15	-0.13	0.78
7,334.00	5.42	162.96	7,322.84	-238.52	71.14	-238.04	0.38	-0.37	-0.86
7,429.00	5.27	164.49	7,417.43	-247.01	73.62	-246.52	0.22	-0.16	1.61
7,523.00	5.52	170.13	7,511.01	-255.62	75.55	-255.12	0.62	0.27	6.00
7,618.00	5.77	178.51	7,605.55	-264.90	76.45	-264.39	0.91	0.26	8.82
7,713.00	5.75	178.38	7,700.07	-274.43	76.71	-273.92	0.03	-0.02	-0.14
7,808.00	5.80	177.54	7,794.59	-283.98	77.05	-283.47	0.10	0.05	-0.88
7,903.00	6.70	180.84	7,889.02	-294.32	77.18	-293.80	1.02	0.95	3.47
7,997.00	6.70	184.09	7,982.38	-305.27	76.71	-304.76	0.40	0.00	3.46
8,092.00	6.72	184.56	8,076.73	-316.34	75.87	-315.83	0.06	0.02	0.49
8,282.00	6.94	178.15	8,265.39	-338.90	75.36	-338.39	0.42	0.12	-3.37
8,377.00	6.92	177.55	8,359.69	-350.35	75.79	-349.84	0.08	-0.02	-0.63
8,472.00	6.95	177.68	8,454.00	-361.81	76.26	-361.30	0.04	0.03	0.14
8,567.00	6.38	178.86	8,548.35	-372.83	76.60	-372.32	0.62	-0.60	1.24
8,661.00	5.67	177.39	8,641.83	-382.69	76.92	-382.18	0.77	-0.76	-1.56
8,756.00	4.93	177.88	8,736.43	-391.46	77.28	-390.94	0.78	-0.78	0.52
8,851.00	4.79	175.42	8,831.09	-399.49	77.75	-398.97	0.26	-0.15	-2.59
8,946.00	4.24	175.96	8,925.79	-406.95	78.31	-406.42	0.58	-0.58	0.57
9,136.00	3.88	170.55	9,115.31	-420.30	79.86	-419.76	0.28	-0.19	-2.85



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Now I Won 25_24 Fed Com 35H
Project:	Eddy County, NM (NAD83-NME)	TVD Reference:	RKB @ 3570.00usft (Citadel 3)
Site:	Now I Won 25_24	MD Reference:	RKB @ 3570.00usft (Citadel 3)
Well:	Now I Won 25_24 Fed Com 35H	North Reference:	Grid
Wellbore:	OH / 74282	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Citadel 3)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,325.00	3.49	175.52	9,303.92	-432.34	81.36	-431.79	0.27	-0.21	2.63
9,420.00	3.21	174.75	9,398.76	-437.87	81.83	-437.32	0.30	-0.29	-0.81
9,515.00	3.68	173.38	9,493.59	-443.55	82.43	-442.99	0.50	0.49	-1.44
9,610.00	3.78	172.50	9,588.39	-449.68	83.19	-449.12	0.12	0.11	-0.93
9,800.00	3.28	172.12	9,778.03	-461.27	84.75	-460.71	0.26	-0.26	-0.20
9,894.00	3.32	173.64	9,871.87	-466.64	85.42	-466.07	0.10	0.04	1.62
9,989.00	3.34	176.34	9,966.71	-472.14	85.90	-471.56	0.17	0.02	2.84
10,084.00	2.71	170.87	10,061.58	-477.12	86.43	-476.54	0.73	-0.66	-5.76
10,274.00	3.34	158.09	10,251.31	-486.69	89.21	-486.09	0.48	0.33	-6.73
10,369.00	3.53	160.11	10,346.14	-492.01	91.24	-491.39	0.24	0.20	2.13
10,464.00	3.50	162.46	10,440.97	-497.52	93.11	-496.90	0.15	-0.03	2.47
10,558.00	3.39	162.02	10,534.80	-502.90	94.83	-502.26	0.12	-0.12	-0.47
10,748.00	3.25	184.95	10,724.48	-513.61	96.10	-512.96	0.70	-0.07	12.07
10,843.00	3.15	181.32	10,819.34	-518.90	95.81	-518.26	0.24	-0.11	-3.82
10,938.00	3.03	187.22	10,914.20	-524.00	95.43	-523.36	0.36	-0.13	6.21
11,033.00	1.92	195.06	11,009.11	-528.03	94.70	-527.39	1.22	-1.17	8.25
11,128.00	2.08	197.61	11,104.05	-531.21	93.77	-530.58	0.19	0.17	2.68
11,243.00	2.82	209.87	11,218.95	-535.65	91.73	-535.04	0.79	0.64	10.66
Final Phoenix Int MWD Survey									
11,341.00	3.19	227.66	11,316.81	-539.58	88.51	-538.98	1.02	0.38	18.15
First HLB MWD Survey									
11,419.00	11.41	307.47	11,394.23	-536.34	80.76	-535.79	14.47	10.54	102.32
11,514.00	19.42	316.78	11,485.75	-519.08	62.45	-518.66	8.80	8.43	9.80
11,609.00	33.92	320.95	11,570.43	-486.81	34.79	-486.57	15.38	15.26	4.39
11,703.00	40.44	346.16	11,645.72	-436.50	10.81	-436.41	17.50	6.94	26.82
11,798.00	45.85	12.68	11,715.58	-372.75	10.92	-372.67	19.80	5.69	27.92
11,893.00	46.00	23.20	11,781.76	-308.00	31.89	-307.79	7.95	0.16	11.07
11,988.00	51.50	20.76	11,844.38	-241.78	58.55	-241.39	6.10	5.79	-2.57
12,083.00	60.55	16.97	11,897.43	-167.29	83.86	-166.73	10.08	9.53	-3.99
12,178.00	69.70	9.06	11,937.40	-83.44	103.01	-82.76	12.23	9.63	-8.33
12,273.00	74.68	2.77	11,966.47	6.45	112.26	7.19	8.20	5.24	-6.62
12,368.00	85.00	3.06	11,983.21	99.71	117.01	100.48	10.87	10.86	0.31
12,444.00	84.59	1.77	11,990.10	175.33	120.20	176.12	1.77	-0.54	-1.70
Final HLB MWD Survey - Tie In to HLB MWD Surveys									
12,477.00	84.27	1.73	11,993.31	208.16	121.20	208.95	0.98	-0.97	-0.12
First Phoenix Lateral MWD Survey									
12,572.00	84.81	1.53	12,002.34	302.69	123.89	303.50	0.61	0.57	-0.21
12,667.00	88.38	1.05	12,007.99	397.48	126.02	398.30	3.79	3.76	-0.51
12,856.00	94.94	358.23	12,002.51	586.27	124.85	587.08	3.78	3.47	-1.49
12,951.00	92.96	356.56	11,995.97	680.94	120.54	681.72	2.72	-2.08	-1.76
13,141.00	91.65	357.22	11,988.33	870.50	110.24	871.21	0.77	-0.69	0.35
13,236.00	91.61	357.31	11,985.63	965.36	105.71	966.03	0.10	-0.04	0.09
13,331.00	91.69	357.17	11,982.89	1,060.21	101.13	1,060.85	0.17	0.08	-0.15
13,426.00	90.56	354.68	11,981.02	1,154.94	94.39	1,155.54	2.88	-1.19	-2.62



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Now I Won 25_24 Fed Com 35H
Project:	Eddy County, NM (NAD83-NME)	TVD Reference:	RKB @ 3570.00usft (Citadel 3)
Site:	Now I Won 25_24	MD Reference:	RKB @ 3570.00usft (Citadel 3)
Well:	Now I Won 25_24 Fed Com 35H	North Reference:	Grid
Wellbore:	OH / 74282	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Citadel 3)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,520.00	92.43	359.19	11,978.57	1,248.75	89.36	1,249.31	5.19	1.99	4.80
13,615.00	91.44	0.30	11,975.36	1,343.69	88.94	1,344.24	1.57	-1.04	1.17
13,710.00	92.06	1.82	11,972.46	1,438.62	90.69	1,439.19	1.73	0.65	1.60
13,805.00	90.63	0.62	11,970.23	1,533.57	92.72	1,534.15	1.96	-1.51	-1.26
13,900.00	91.59	4.42	11,968.39	1,628.44	96.89	1,629.05	4.12	1.01	4.00
13,995.00	90.73	3.46	11,966.47	1,723.20	103.42	1,723.84	1.36	-0.91	-1.01
14,185.00	90.93	1.78	11,963.71	1,912.97	112.10	1,913.67	0.89	0.11	-0.88
14,279.00	91.38	3.62	11,961.82	2,006.84	116.53	2,007.57	2.01	0.48	1.96
14,374.00	90.94	2.32	11,959.90	2,101.70	121.45	2,102.45	1.44	-0.46	-1.37
14,469.00	91.17	3.63	11,958.15	2,196.55	126.38	2,197.33	1.40	0.24	1.38
14,659.00	89.78	358.21	11,956.57	2,386.44	129.43	2,387.24	2.94	-0.73	-2.85
14,849.00	90.47	357.65	11,956.16	2,576.32	122.56	2,577.07	0.47	0.36	-0.29
14,944.00	90.01	353.99	11,955.76	2,671.05	115.64	2,671.75	3.88	-0.48	-3.85
15,039.00	89.51	352.60	11,956.16	2,765.39	104.55	2,766.02	1.55	-0.53	-1.46
15,229.00	90.99	0.05	11,955.33	2,954.86	92.38	2,955.41	4.00	0.78	3.92
15,418.00	90.69	359.23	11,952.56	3,143.84	91.19	3,144.37	0.46	-0.16	-0.43
15,513.00	90.62	359.87	11,951.47	3,238.83	90.45	3,239.35	0.68	-0.07	0.67
15,608.00	90.96	359.92	11,950.16	3,333.82	90.27	3,334.34	0.36	0.36	0.05
15,798.00	90.76	1.40	11,947.31	3,523.78	92.46	3,524.31	0.79	-0.11	0.78
15,893.00	90.25	0.19	11,946.47	3,618.76	93.78	3,619.30	1.38	-0.54	-1.27
16,082.00	90.67	1.12	11,944.95	3,807.74	95.94	3,808.29	0.54	0.22	0.49
16,272.00	89.10	359.74	11,945.33	3,997.73	97.36	3,998.28	1.10	-0.83	-0.73
16,462.00	90.94	2.34	11,945.27	4,187.67	100.81	4,188.24	1.68	0.97	1.37
16,651.00	91.12	2.33	11,941.87	4,376.48	108.51	4,377.10	0.10	0.10	-0.01
16,746.00	90.85	2.00	11,940.24	4,471.40	112.10	4,472.04	0.45	-0.28	-0.35
16,841.00	89.95	0.80	11,939.57	4,566.37	114.42	4,567.02	1.58	-0.95	-1.26
16,913.68	90.72	0.83	11,939.15	4,639.04	115.46	4,639.70	1.06	1.06	0.04
SL: 16913.68' MD									
16,936.00	90.96	0.84	11,938.82	4,661.35	115.78	4,662.01	1.06	1.06	0.04
17,031.00	90.92	0.57	11,937.26	4,756.33	116.95	4,757.00	0.29	-0.04	-0.28
17,126.00	91.93	4.38	11,934.90	4,851.20	121.05	4,851.89	4.15	1.06	4.01
17,221.00	91.13	3.54	11,932.36	4,945.93	127.61	4,946.67	1.22	-0.84	-0.88
17,315.00	91.39	1.90	11,930.29	5,039.80	132.07	5,040.56	1.77	0.28	-1.74
17,410.00	91.15	359.80	11,928.19	5,134.76	133.48	5,135.53	2.22	-0.25	-2.21
17,505.00	91.27	358.99	11,926.18	5,229.74	132.47	5,230.50	0.86	0.13	-0.85
17,600.00	91.55	358.16	11,923.84	5,324.68	130.11	5,325.42	0.92	0.29	-0.87
17,695.00	91.41	356.91	11,921.39	5,419.56	126.03	5,420.27	1.32	-0.15	-1.32
17,790.00	90.38	354.66	11,919.91	5,514.28	119.05	5,514.94	2.60	-1.08	-2.37
17,884.00	91.07	356.54	11,918.72	5,607.99	111.83	5,608.61	2.13	0.73	2.00
17,979.00	90.33	355.97	11,917.56	5,702.78	105.63	5,703.35	0.98	-0.78	-0.60
18,074.00	89.31	355.10	11,917.86	5,797.49	98.23	5,798.01	1.41	-1.07	-0.92
18,169.00	91.04	356.40	11,917.56	5,892.22	91.19	5,892.69	2.28	1.82	1.37
18,264.00	90.51	357.18	11,916.28	5,987.06	85.88	5,987.50	0.99	-0.56	0.82
18,359.00	91.29	359.57	11,914.79	6,082.00	83.18	6,082.42	2.65	0.82	2.52



Phoenix Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Now I Won 25_24 Fed Com 35H
Project:	Eddy County, NM (NAD83-NME)	TVD Reference:	RKB @ 3570.00usft (Citadel 3)
Site:	Now I Won 25_24	MD Reference:	RKB @ 3570.00usft (Citadel 3)
Well:	Now I Won 25_24 Fed Com 35H	North Reference:	Grid
Wellbore:	OH / 74282	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Citadel 3)	Database:	USAEDMDB

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
18,454.00	93.07	2.77	11,911.17	6,176.90	85.12	6,177.33	3.85	1.87	3.37
18,644.00	91.84	0.94	11,903.03	6,366.61	91.26	6,367.08	1.16	-0.65	-0.96
18,738.00	90.90	359.97	11,900.79	6,460.58	92.01	6,461.05	1.44	-1.00	-1.03
18,833.00	92.63	1.63	11,897.86	6,555.52	93.33	6,555.99	2.52	1.82	1.75
18,928.00	92.57	1.42	11,893.55	6,650.39	95.86	6,650.88	0.23	-0.06	-0.22
19,023.00	90.43	0.49	11,891.06	6,745.34	97.44	6,745.83	2.46	-2.25	-0.98
19,118.00	90.28	0.71	11,890.48	6,840.33	98.44	6,840.83	0.28	-0.16	0.23
19,213.00	90.58	0.38	11,889.76	6,935.32	99.34	6,935.83	0.47	0.32	-0.35
19,308.00	90.87	1.40	11,888.56	7,030.30	100.81	7,030.81	1.12	0.31	1.07
19,403.00	90.68	358.76	11,887.28	7,125.29	100.95	7,125.80	2.79	-0.20	-2.78
19,498.00	89.25	356.62	11,887.33	7,220.20	97.12	7,220.68	2.71	-1.51	-2.25
19,592.00	89.30	356.75	11,888.52	7,314.03	91.68	7,314.48	0.15	0.05	0.14
19,687.00	89.41	356.55	11,889.59	7,408.87	86.13	7,409.27	0.24	0.12	-0.21
19,782.00	90.32	357.67	11,889.82	7,503.74	81.34	7,504.12	1.52	0.96	1.18
19,877.00	90.62	359.88	11,889.04	7,598.71	79.31	7,599.07	2.35	0.32	2.33
19,972.00	90.35	0.58	11,888.23	7,693.71	79.69	7,694.07	0.79	-0.28	0.74
20,067.00	90.21	1.36	11,887.77	7,788.69	81.30	7,789.06	0.83	-0.15	0.82
20,162.00	90.82	1.38	11,886.91	7,883.66	83.57	7,884.04	0.64	0.64	0.02
20,256.00	89.33	359.73	11,886.79	7,977.65	84.48	7,978.03	2.37	-1.59	-1.76
20,351.00	90.54	0.16	11,886.90	8,072.65	84.39	8,073.03	1.35	1.27	0.45
20,446.00	87.86	358.20	11,888.23	8,167.62	83.03	8,167.99	3.49	-2.82	-2.06
20,541.00	89.47	358.19	11,890.44	8,262.54	80.04	8,262.89	1.69	1.69	-0.01
20,636.00	90.68	0.76	11,890.31	8,357.53	79.17	8,357.87	2.99	1.27	2.71
20,731.00	90.74	1.52	11,889.14	8,452.50	81.06	8,452.85	0.80	0.06	0.80
20,826.00	91.01	0.69	11,887.69	8,547.47	82.89	8,547.83	0.92	0.28	-0.87
20,920.00	90.91	1.18	11,886.11	8,641.44	84.43	8,641.81	0.53	-0.11	0.52
21,110.00	92.13	3.59	11,881.07	8,831.19	92.33	8,831.61	1.42	0.64	1.27
21,205.00	89.62	3.47	11,879.62	8,926.00	98.18	8,926.45	2.65	-2.64	-0.13
21,300.00	87.66	359.48	11,881.88	9,020.91	100.62	9,021.38	4.68	-2.06	-4.20
21,395.00	89.89	0.57	11,883.91	9,115.88	100.66	9,116.35	2.61	2.35	1.15
21,490.00	91.34	1.44	11,882.89	9,210.86	102.33	9,211.34	1.78	1.53	0.92
21,584.00	90.18	1.50	11,881.64	9,304.82	104.74	9,305.31	1.24	-1.23	0.06
21,679.00	88.43	1.31	11,882.79	9,399.78	107.07	9,400.28	1.85	-1.84	-0.20
21,774.00	90.61	1.60	11,883.59	9,494.74	109.48	9,495.26	2.31	2.29	0.31
21,869.00	90.30	359.14	11,882.83	9,589.73	110.10	9,590.25	2.61	-0.33	-2.59
21,964.00	91.29	358.92	11,881.52	9,684.70	108.49	9,685.21	1.07	1.04	-0.23
22,024.00	89.82	359.59	11,880.93	9,744.69	107.71	9,745.19	2.69	-2.45	1.12
Final Phoenix MWD Survey									
22,098.11	89.82	359.59	11,881.17	9,818.80	107.18	9,819.30	0.00	0.00	0.00
LTP: 22098.11' MD									
22,142.00	89.82	359.59	11,881.31	9,862.69	106.86	9,863.18	0.00	0.00	0.00
Projection to TD									



Phoenix
Survey Report



Company:	OXY USA INC.	Local Co-ordinate Reference:	Well Now I Won 25_24 Fed Com 35H
Project:	Eddy County, NM (NAD83-NME)	TVD Reference:	RKB @ 3570.00usft (Citadel 3)
Site:	Now I Won 25_24	MD Reference:	RKB @ 3570.00usft (Citadel 3)
Well:	Now I Won 25_24 Fed Com 35H	North Reference:	Grid
Wellbore:	OH / 74282	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Citadel 3)	Database:	USAEDMDB

Design Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,028.00	1,027.95	-1.72	6.31	Tie In to Surface MWD
1,171.00	1,170.95	-1.79	6.01	First Phoenix MWD Survey
11,243.00	11,218.95	-535.65	91.73	Final Phoenix Int MWD Survey
11,341.00	11,316.81	-539.58	88.51	First HLB MWD Survey
12,444.00	11,990.10	175.33	120.20	Final HLB MWD Survey
12,444.00	11,990.10	175.33	120.20	Tie In to HLB MWD Surveys
12,477.00	11,993.31	208.16	121.20	First Phoenix Lateral MWD Survey
16,913.68	11,939.15	4,639.04	115.46	SL: 16913.68' MD
22,024.00	11,880.93	9,744.69	107.71	Final Phoenix MWD Survey
22,098.11	11,881.17	9,818.80	107.18	LTP: 22098.11' MD
22,142.00	11,881.31	9,862.69	106.86	Projection to TD

C-105	State of New Mexico	Revised July 9, 2024
Submit Electronically Via OCD Permitting	Energy, Minerals & Natural Resources Department	
OIL CONSERVATION DIVISION		

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

Section 1 - Operator and Well Information

Submittal Type: ☒ New Well ☐ Workover ☐ Deepening ☐ Plugback ☐ Different Reservoir ☐ C-144 Closure Attachment ☐ Other	
Operator Name: OXY USA INC	OGRID: 16696
Property Name and Well Number: OLIVE WON UNIT 135H	Property Code: 336102
Mineral Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal	API Number: 30-0 15-54755
Pool Name: WC 22S31E13; Wolfcamp	Pool Code: 98351

Section 2 – Well Location

	UI or lot no.	Section	Township	Range	Lot Id	Feet from	N/S Line	Feet from	E/W Line	County
SHL:	P	25	22S	31E		652'	S	1117'	E	EDDY
BHL	A	24	22S	31E		56'	N	949'	E	EDDY

Section 3 – Completion Information

Date T.D. Reached 04/30/24	Total Measured Depth of Well 22142'MD	Acid Volume (bbls)	☒ Directional Survey Submitted ☐ Deviation Survey Submitted
Date Rig Released 05/02/24	Plug-Back Measured Depth 22097'MD	Completion Fluid Used (bbls) 346602 bbls	Were Logs Ran (Y/N) Y
Completion Date 06/24/24	Perforations (MD and TVD) 12102-22016'MD/11907-11881'TVD	Completion Proppant Used (lbs) 24796274#	List Type of Logs Ran if applicable: CBL

Section 4 – Action IDs for Submissions and Order Numbers

Surface Casing Action ID: 348958	UIC Permit/Order (UIC wells only) ☐ Yes ☒ No, Order No.
Intermediate 1 Casing Action ID: 348958	NOI Recomplete Action ID (if applicable):
Intermediate 2 Casing Action ID:	NOI Plugback Action ID (if applicable):
Production Casing Action ID: 348958	Cement Squeeze Action ID (if applicable):
Tubing Action ID:	All casing was pressure tested in accordance with NMAC ☒ Yes ☐ No
Liner 1 Action ID:	Casing was installed prior to Action ID system (Y/N): N

Section 5 – Test Data

Date First Production 06/27/24	Production Method Gas lift	Well Status Producing	Gas – Oil Ratio 1752
Date of Test 07/07/24	Choke Size 43	Flowing Tubing Pressure	Casing Pressure 2079
24 hr Oil (bbls) 3843	24 hr Gas (MCF) 6732	24 hr Water (bbls) 4875	Oil Gravity - API
Disposition of Gas: sold			

Section 6 – Pits


☐ A temporary pit was used at the well. If so, attach a plat with the location of the temporary pit.
☒ A Closed Loop System was used.
☐ If an on-site burial was used at the well, report the exact location of the on-site burial: LAT: LONG:

Section 7 - Operator Signature and Certification

☒ I hereby certify that the required Water Use Report has been, or will be, submitted for this well’s completion.	
☒ I hereby certify that the required Fracfocus disclosure has been, or will be, submitted for this well’s completion.	
☒ I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.	
Name Jana Mendiola	<i>Jana Mendiola</i>
Title Regulatory Advisor	Date 09/10/24

South Formations				North Formations			
Formation/Zone	MD	TVD	W/O/G	Formation/Zone	MD	TVD	W/O/G
T. Anhy	851'	851'	W	T. San Jose			
T. Salt	1128'	1128'		T. Nacimiento			
B. Salt	3136'	3136'		T. Ojo Alamo			
T. Yates				T. Kirtland			
T. 7 Rivers				T. Fruitland			
T. Queen				T. Pictured Cliffs			
T. Grayburg				T. Lewis Shale			
T. San Andres				T. Chacra			
T. Glorieta				T. Cliff House			
T. Yeso				T. Menefee			
T. Paddock				T. Point Lookout			
T. Blinebry				T. Mancos			
T.Tubb				T. Gallup			
T. Drinkard				T. Greenhorn			
T. Abo				T. Graneros			
T. Wolfcamp	11776'	11700'	o/g	T. Dakota			
T. Penn				T. Morrison			
T. Cisco				T. Bluff			
T. Canyon				T.Todilto			
T. Strawn				T. Entrada			
T. Atoka				T. Wingate			
T. Morrow				T. Chinle			
T. Barnett Shale				T. Permian			
T. Miss				T. Penn A"			
T. Woodford Shale				T. Penn. "B"			
T. Devonian				T. Penn. "C"			
T. Silurian				T. Penn. "D"			
T. Fusselman				T. Leadville			
T. Montoya				T. Madison			
T. Simpson				T. Elbert			
T. McKee				T. McCracken			
T. Waddell				T. Ignacio Otzte			
T. Connel				T. Granite			
T. Ellenburger				T. Hermosa			
T. Gr. Wash				T. De Chelly			
T. Delaware Sand				T. Pinkerton			
T. Lamar Lime	4559'	4558'	o/g				
T. Bell Canyon	4601'	4600'	o/g				
T. Cherry Canyon	5460'	5459'	o/g				
T. Brushy Canyon	6668'	6661'	o/g				
T. Bone Springs	8434'	8416'	o/g				
T. 1st BS Sand	9506'	9485'	o/g				
T. 2nd BS Carbonate							
T. 2nd BS Sand	10222'	10199'	o/g				
T. 3rd BS Carbonate							
T. 3rd BS Sand	11305'	11281'	o/g				

OXY USA Inc.
OLIVE WON UNIT 135H
API No. 30-015-54755

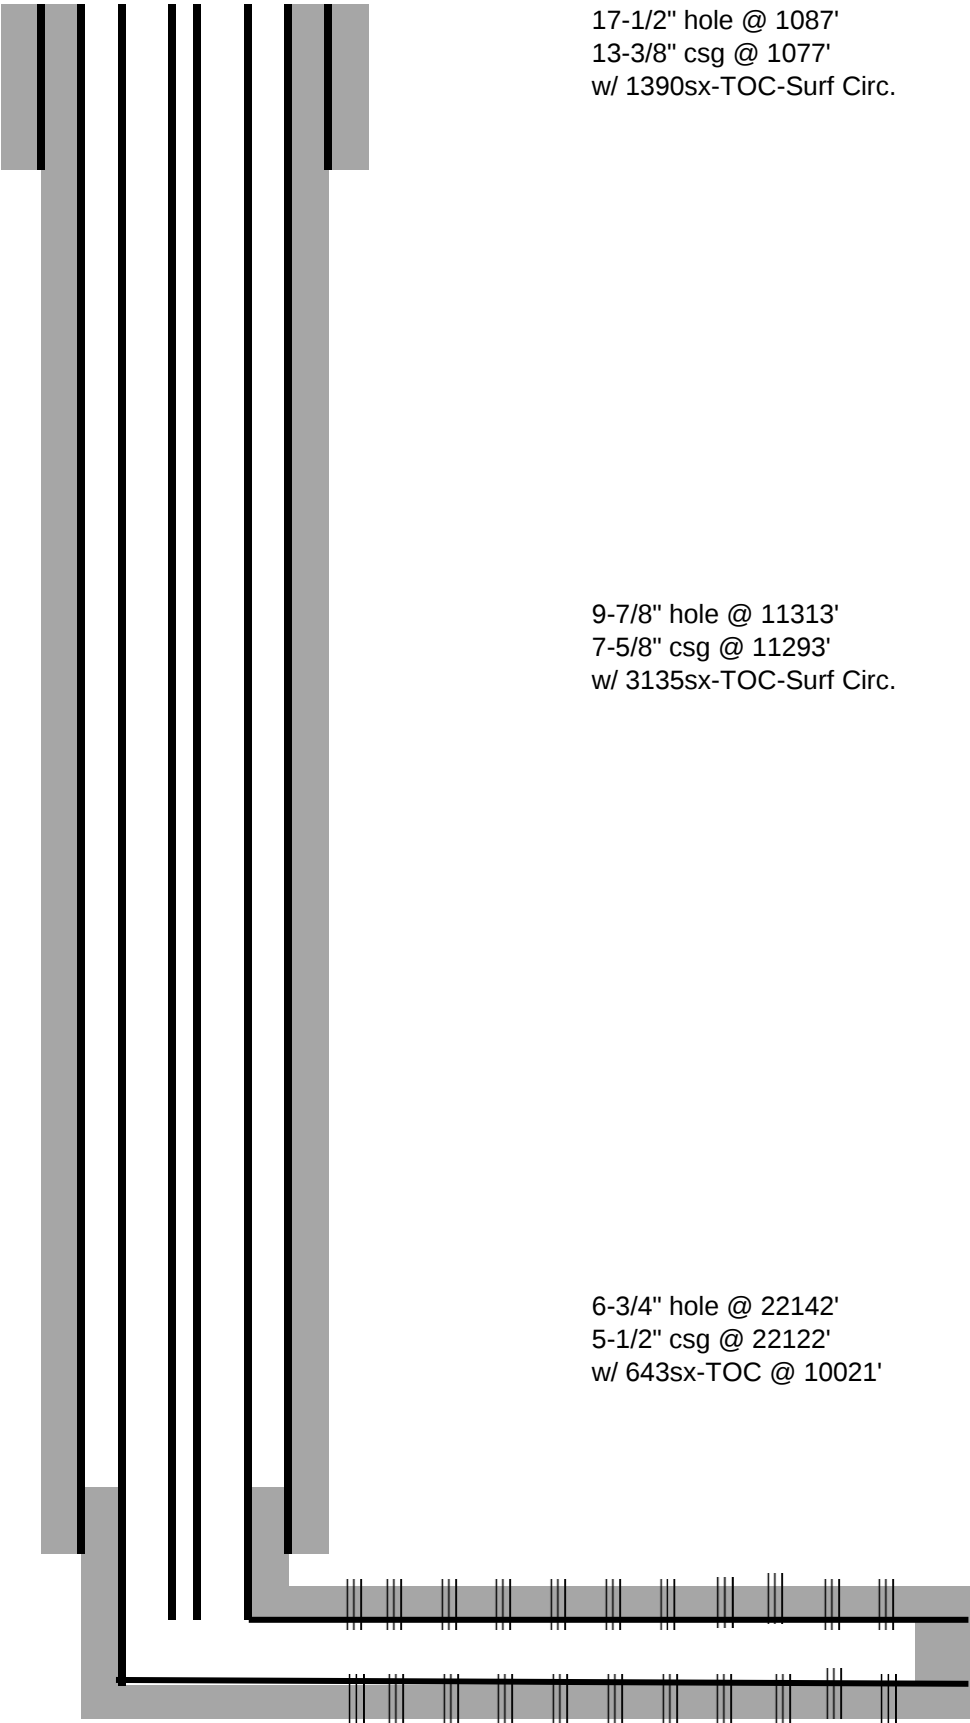

17-1/2" hole @ 1087'
13-3/8" csg @ 1077'
w/ 1390sx-TOC-Surf Circ.

9-7/8" hole @ 11313'
7-5/8" csg @ 11293'
w/ 3135sx-TOC-Surf Circ.

6-3/4" hole @ 22142'
5-1/2" csg @ 22122'
w/ 643sx-TOC @ 10021'

2-3/8" tbg & gas lift @ 11610'

Perfs @ 12102-22016' TD- 22142'M 9863'V

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 383268

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 383268
	Action Type: [C-104] Completion Packet - New Well (C-104NW)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.
☒	I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 383268

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 383268
	Action Type: [C-104] Completion Packet - New Well (C-104NW)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	File 3160-4 within 10 days of BLM Approval.	12/3/2024