# Sundry Print Report

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Well Name: BURCH KEELY UNIT Well Location: T17S / R29E / SEC 26 / County or Parish/State: EDDY /

SWNE / 32.8069534 / -104.0432892

Well Number: 665 Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMLC028784B Unit or CA Name: BURCH KEELY UNIT Unit or CA Number:

NMNM88525X

LLC

#### **Notice of Intent**

**Sundry ID: 2824003** 

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 11/22/2024 Time Sundry Submitted: 07:29

Date proposed operation will begin: 02/09/2025

Procedure Description: Please find proposed P&A procedure, current wellbore diagram and proposed diagram

attached for your review.

### **Surface Disturbance**

Is any additional surface disturbance proposed?: No

# **NOI Attachments**

#### **Procedure Description**

BKU\_665\_\_\_WBD\_\_\_CURRENT\_20241122072941.pdf

BKU\_665\_\_\_WBD\_\_\_PROPOSED\_P\_A\_20241122072941.pdf

BKU\_665\_P\_A\_PROCEDURE\_20241122072925.pdf

eceived by OCD: 1/26/2025 6:55:25 PM Well Name: BURCH KEELY UNIT

Well Location: T17S / R29E / SEC 26 /

SWNE / 32.8069534 / -104.0432892

County or Parish/State: Page 2 of

NM

Zip:

Well Number: 665

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMLC028784B

Unit or CA Name: BURCH KEELY UNIT

NMNM88525X

**Unit or CA Number:** 

**US Well Number:** 3001538538

**Operator: SPUR ENERGY PARTNERS** 

LLC

# **Conditions of Approval**

#### **Specialist Review**

BKU\_665\_BLM\_Revised\_P\_A\_Procedure\_and\_COA\_20250125110055.pdf

# **Operator**

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SARAH CHAPMAN Signed on: NOV 22, 2024 07:29 AM

Name: SPUR ENERGY PARTNERS LLC

Title: Regulatory Director

Street Address: 9655 KATY FREEWAY SUITE 500

City: HOUSTON State: TX

Phone: (281) 642-5503

Email address: SCHAPMAN@SPURENERGY.COM

#### **Field**

**Representative Name:** 

**Street Address:** 

City: State:

Phone:

**Email address:** 

## **BLM Point of Contact**

Signature: Zota Stevens

BLM POC Name: ZOTA M STEVENS BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752345998 BLM POC Email Address: ZSTEVENS@BLM.GOV

**Disposition:** Approved **Disposition Date:** 01/25/2025

Disposition: Approved

Page 2 of 2

Form 3160-5 (June 2019)

# UNITED STATES DEPARTMENT OF THE INTERIOR

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 202

BUREAU OF LAND MANAGEMENT			5. Lease Serial No.			
Do not use this t	NOTICES AND REPO form for proposals t Use Form 3160-3 (A	o drill or to re-	enter an	6. If Indian, Allottee or Tribe	Name	
SUBMIT IN	TRIPLICATE - Other instru	uctions on page 2		7. If Unit of CA/Agreement,	Name and/or No.	
1. Type of Well Gas V	Vell Other			8. Well Name and No.		
2. Name of Operator	ven outer			9. API Well No.		
3a. Address		3b. Phone No. (include	de area code)	10. Field and Pool or Explora	atory Area	
4. Location of Well (Footage, Sec., T.,F	R.,M., or Survey Description)			11. Country or Parish, State		
12. CHE	CK THE APPROPRIATE B	OX(ES) TO INDICAT	TE NATURE (	OF NOTICE, REPORT OR OT	HER DATA	
TYPE OF SUBMISSION			TYPI	E OF ACTION		
Notice of Intent	Acidize Alter Casing	Deepen Hydraulic F	Fracturing	Production (Start/Resume) Reclamation	Water Shut-Off Well Integrity	
Subsequent Report	Casing Repair Change Plans	New Constr		Recomplete Temporarily Abandon	Other	
Final Abandonment Notice	Convert to Injection	Plug Back		Water Disposal		
is ready for final inspection.)  14. I hereby certify that the foregoing is			uding reciama	nion, nave been completed and	the operator has detennined that the	site
14. I hereby certify that the foregoing is	true and correct. Name (Pri	nted/Iyped) Title				
Signature		Date				
	THE SPACE	FOR FEDERA	L OR STA	TE OFICE USE		
Approved by			Title		Data	
Conditions of approval, if any, are attactions of approval, if any, are attactions that the applicant holds legal or which would entitle the applicant to con	equitable title to those rights		Office		Date	
Title 18 U.S.C Section 1001 and Title 4	3 U.S.C Section 1212, make	it a crime for any pers	son knowingly	and willfully to make to any c	lepartment or agency of the United S	States

any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

#### **GENERAL INSTRUCTIONS**

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

#### SPECIFIC INSTRUCTIONS

*Item 4* - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

#### **NOTICES**

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

(Form 3160-5, page 2)

#### **Additional Information**

#### **Location of Well**

 $0. \ SHL: \ SWNE \ / \ 2130 \ FNL \ / \ 1980 \ FEL \ / \ TWSP: \ 17S \ / \ RANGE: \ 29E \ / \ SECTION: \ 26 \ / \ LAT: \ 32.8069534 \ / \ LONG: \ -104.0432892 \ ( \ TVD: \ 0 \ feet, \ MD: \ 5100 \ feet \ )$   $BHL: \ SWNE \ / \ 2130 \ FNL \ / \ 1980 \ FEL \ / \ TWSP: \ 17S \ / \ SECTION: \ / \ LAT: \ 0.0 \ / \ LONG: \ 0.0 \ ( \ TVD: \ 0 \ feet, \ MD: \ 5100 \ feet \ )$ 

API#	30-015-38538
Operator	Spur Energy Partners
Field	BURCH KEELY; GLORIETA-UPPER YESO
Spud Date	7/11/2011

#### **BURCH KEELY UNIT 665**

County, ST	Eddy County, NM
Sec-Twn-Rng	26-17S-29E
Footage	2130 FNL, 1980 FEL
Survey	32.8069534,-104.0432892

Formation (MD)		
TOP OF SALT	352	
BASE OF SALT	800	
YATES	948	
QUEEN	1,891	
GRAYBURG	2,286	
SAN ANDRES	2,631	
GLORIETA	4,172	
YESO	4280.2	

RKB	
GL	3576

Hole Size	17 1/2"
TOC	SURF
Method	CIRC

Csg Depth	307'
Size	13 3/8"
Weight	48
Grade	
Connections	
Cement	1062 SX

Hole Size	11"
TOC	SURF
Method	CIRC

Csg Depth	875'
Size	8 5/8"
Weight	24#
Grade	
Connections	
Cement	400 SX

|--|

2 7/8" 6.5# J55 TBG

TAC @ 4119'

Hole Size	7 7/8"
TOC	SURF
Method	CIRC

Csg Depth	4806'
Size	5 1/2"
Weight	17#
Grade	
Connections	
Cement	900 SX

PBTD	4,759
TD MD	4,810
TD TVD	4,810

SN @ 4530' EOT @ 4549'

8/11/2011: PERFS @ 4252' - 4510'

Last Update By 11/21/2024 WSC

API#	30-015-38538			
Operator	Spur Energy Partners			
Field	BURCH KEELY; GLORIETA-UPPER YESO			ER YESO
Spud Date	7/11/2011			
Forma	tion (N	ЛD)		RKB
TOD OF S	ALT	25.2		CI

# PROPOSED P&A BURCH KEELY UNIT 665

	County, ST	Eddy County, NM
	Sec-Twn-Rng	26-17S-29E
	Footage	2130 FNL, 1980 FEL
	Survey	32.8069534,-104.0432892
1	,	

Formation (MD)	
TOP OF SALT	352
BASE OF SALT	800
YATES	948
QUEEN	1,891
GRAYBURG	2,286
SAN ANDRES	2,631
GLORIETA	4,172
YESO	4,280

RKB	
GL	3583
	-
Hole Size	17 1/2"
TOC	SURF
Method	CIRC

Csg Depth	307'
Size	13 3/8"
Weight	48
Grade	
Connections	
Cement	1062 SX


Hole Size	11"
TOC	SURF
Method	CIRC

Csg Depth	875'
Size	8 5/8"
Weight	24#
Grade	
Connections	
Cement	400 SX

Hole Size	7 7/8"
TOC	SURF
Method	CIRC

Csg Depth	4806'
Size	5 1/2"
Weight	17#
Grade	
Connections	
Cement	900 SX

PBTD	4,759
TD MD	4,810
TD TVD	4,810

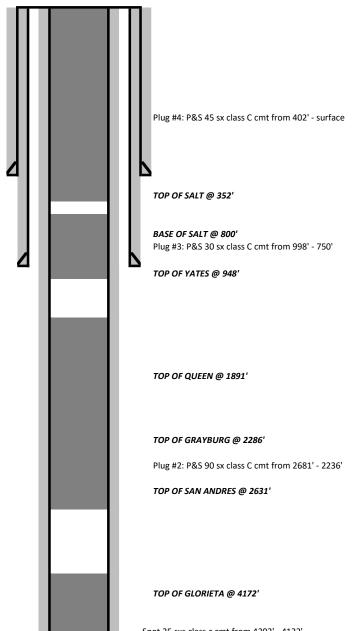

Spot 25 sxs class c cmt from 4202' - 4122' Plug #1: CIBP @ 4202'

TOP OF YESO @ 4280'

8/11/2011: PERFS @ 4252' - 4510'



Last Update

Ву

11/21/2024

WSC

#### **BKU 665 P&A Procedure**

30-015-38538 32.8069534,-104.0432892

- 1. POOH rods and tbg. Rod and tbg details unknown.
- 2. Set 5.5" CIBP @ 4202'. Circ hole w/ MLF. Pressure test csg. 500 psi, 30 min. Run CBL from TOC surface. Spot 25 sx class C cmt @ 4202' 4122' (Perfs / Yeso / Glorieta). WOC & Tag. (Plug 1)
- 3. Spot 90 sx class C cmt @ 2681' 2236' (San Andres / Grayburg / Queen). WOC & Tag. (Plug 2)
- 4. Spot 30 sx class C cmt @ 998' 750' (Yates / Base of Salt / 8 5/8" Shoe). WOC & Tag. (Plug 3)
- 5. Spot 45 sx class C cmt @ 402' Surface (13 3/8" shoe / Top of Salt). Verify Cmt to surface. (Plug 4)
- 6. Top off all annuli from back side.
- 7. Cut off Wellhead. Weld on below ground dry hole marker. Send picture to engineer.

#### **Revised P&A Procedure**

- 1. MIRU P&A unit. POOH rods and tubing string.
- 2. Set CIBP at 4202ft. Spot 25 sx of CI C cement from 4202' -4122'. WOC and Tag (Pressure Test).
- 3. Run CBL from 4122 ft to surface. Contact BLM after running CBL.
- 4. Perf and Sqz 90 sx of Cl C from 2681'-2236'. (T/ Grayburg, T/San Andres)
- 5. Perf and Sqz 30sx of Cl C from 998'- 750'. WOC and Tag (T/Yates, B/Salt, Csg Shoe)
- 6. Perf and Sqz 45 sx from 402' to surface.
- 7. Circ mud between each plug.
- 8. Cut wellhead off. Set Dry Hole marker.

# BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

## Permanent Abandonment of Federal Wells Conditions of Approval (LPC Habitat)

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.
- 5. Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours for Class C or accelerated cement (calcium chloride) and 6 hours for Class H. Tagging the plug means running in the hole with a string of tubing or drill pipe and placing sufficient weight on the plug to ensure its integrity. Other methods of tagging the plug may be approved by the BLM authorized officer or BLM field representative.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a

bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

Fluid used to mix the cement in R111Q shall be saturated with the salts common to the section penetrated, and in suitable proportions but not less than 1% and not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

6. Below Ground Level Cap (Lesser Prairie-Chicken Habitat): All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified BY PHONE (numbers listed in 2. Notifications) a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10<sup>th</sup> day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ½ inch thick and welded in place. A weep hole shall be left in the plate and/or casing. The following information shall be permanently inscribed on the plate: well name and number, name of operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

- 7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

#### Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:

From March 1<sup>st</sup> through June 15<sup>th</sup> annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted



# **United States Department of the Interior**

#### BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

#### **Reclamation Objectives and Procedures**

**Reclamation Objective:** Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines (Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure). Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- 1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well abandonment.
- The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry

Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos

Supervisory Petroleum Engineering Tech/Environmental Protection Specialist 575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Crisha Morgan Environmental Protection Specialist 575-234-5987

Jose Martinez-Colon Environmental Protection Specialist 575-234-5951

Mark Mattozzi Environmental Protection Specialist 575-234-5713

Robert Duenas Environmental Protection Specialist 575-234-2229

Doris Lauger Martinez Environmental Protection Specialist 575-234-5926

Jaden Johnston Environmental Protection Asst. (Intern) 575-234-6252 Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

# State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 424761

#### **CONDITIONS**

Operator:	OGRID:
Spur Energy Partners LLC	328947
9655 Katy Freeway	Action Number:
Houston, TX 77024	424761
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

#### CONDITIONS

Created By		Condition Date
gcordero	A Cement Bond Log (CBL) is required to be submitted to electronic permitting.	1/30/2025
gcordero	Submit Cement Bond Logs (CBL) prior to submittal of C-103P.	1/30/2025