Received by OCD: 8/6/2019 1:53:31 PM

### BEFORE THE NEW MEXICO OIL CONSERVATION DIVISION

APPLICATION OF TROVE ENERGY AND WATER, LLC FOR APPROVAL OF A SALT WATER DISPOSAL WELL, LEA COUNTY, NEW MEXICO.

Case	No.	
~		

### **APPLICATION**

Trove Energy and Water, LLC applies for an order approving a salt water disposal well, and in support thereof, states:

- 1. Applicant proposes to drill the WLC Mid Fed. SWD Well No. 4, located 1470 feet from the south line and 1170 feet from the east line of Section 17, Township 25 South, Range 33 East, N.M.P.M., Lea County, New Mexico.
- 2. Applicant proposes to dispose produced water into the Devonian formation in the well at depths of 17440 19000 feet subsurface.
  - 3. A Form C-108 for the subject well is attached hereto as Exhibit A.
  - 4. The granting of this application will prevent waste and protect correlative rights.

**WHEREFORE**, applicant requests that, after notice and hearing, the Division enter its order approving this application.

Respectfully submitted,

James Bruce

Post Office Box 1056

Santa Fe, New Mexico 87504

(505) 982-2043

Attorney for Trove Energy and Water, LLC

						Revised March 23, 2017
	RECEIVED:	F	REVIEWER:	TYPE:	APP NO:	
		122	- Geologic	D OIL CONSERVA al & Engineering Incis Drive, Santo	<b>ATION DIVISIO</b> g Bureau –	
				ATIVE APPLICATION		
λp	pplicant: <u>Tro</u>		GULATIONS WHICH REG	ADMINISTRATIVE APPLICA	DIVISION LEVEL IN SAN	IS TO DIVISION RULES AND TA FE  RID Number: 372488
	THE RESERVE TO SERVE THE PARTY OF THE PARTY	VLC-M Feder			API	30-025-xxxxx
0	ol: Proposed:	SWD; Devonia	n-Silurian		Poo	l Code: 97869
	A. Loca  B. Chec	PPLICATION tion - Spacing NSL  ck one only commingling DHC njection - D	Check those vong Unit – Simulton NSP (PRO)  for [1] or [11]  g – Storage – Me	vhich apply for [A aneous Dedication Dectarea] NS	P(PRORATION UNIT)  P(S	S THE TYPE OF APPLICATION  SD  very
2)	A.  Of B.  R. R. R. A.  R. A.  R. A.	fion requirements of the control of	DED TO: Check to bors or lease hold iding royalty ow equires published had/or concurred had/or concurred to bove, proof of	hose which apply lers ners, revenue ow	oners M	FOR OCD ONLY  Notice Complete  Application Content Complete
3)				ne information sul		

administrative approval is **accurate** and **complete** to the best of my knowledge. I also understand that **no action** will be taken on this application until the required information and notifications are submitted to the Division.

Note: Statement must be completed by an individual with managerial and/or supervisory capacity.

Ben Stone		3/22/2019 Date	
Print or Type Name	EXHIBIT	903-488-9850	
20	CONTRACTOR OF A SERVICE OF THE SERVI	Phone Number	
Sen Jone		ben@sosconsulting.us	
Signature		e-mail Address	



March 22, 2019

New Mexico Oil Conservation Division 1220 South St. Francis Drive Santa Fe, New Mexico 87505

Attn: Mr. Gabriel Wade Acting Director

Re: Application of Trove Energy and Water, LLC to permit for salt water disposal the proposed WLC Mid Federal SWD No.4, to be located in Section 17, Township 25 South, Range 33 East, NMPM, Lea County, New Mexico.

Dear Mr. Wade,

Please find the enclosed form C-108 Application for Authority to Inject, supporting the above-referenced request for salt water disposal. The well will be operated as a commercial endeavor offering operators in the area additional options for produced water disposal.

Trove Energy and Water is a developing salt water disposal services to operators in southeast New Mexico and seeks to optimize efficiency, both economically and operationally, of all its operations. Approval of this application is consistent with that goal as well as the NMOCD's mission of preventing waste and protection of correlative rights.

This application for a proposed Devonian SWD interval includes the currently mandated increased One-Mile Area of Review including pertinent and available seismic information for the area and region. Published legal notice ran March 14, 2018 in the Hobbs News-Sun and all offset operators and other interested parties have been notified individually. The legal notice affidavit is included with this application. The application also includes a wellbore schematic, area of review maps, affected party plat and other required information for a complete Form C-108. The well is located on federal surface and minerals and the Bureau of Land Management CFO and offset operators have been notified of this application. State minerals offset as well and the Oil and Gas Division of the State land Office were noticed.

I respectfully request that the approval of this salt water disposal well proceed swiftly and if you or your staff requires additional information or has any questions, please do not hesitate to call or email me.

Best regards,

Ben Stone, Partner SOS Consulting, LLC

Agent for Trove Energy and Water, LLC

Cc: Application attachment and file

STATE OF NEW MEXICO ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT

### Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, New Mexico 87505

FORM C-108 Revised June 10, 2003

### **APPLICATION FOR AUTHORIZATION TO INJECT**

		-	I LIOATION I	OKAOIIIO	MEATION	JINDLOT			
l.	PURPOSE:	Salt Water Dis	sposal and the a	application Q	UALIFIES for a	administrative	approval.		
II.	OPERATOR: ADDRESS:		and Water, LLO urner, Hobbs, N						
	CONTACT PARTY:	Agent: SOS C	onsulting, LLC	– Ben Stone	903) 488-98	50			
III.	WELL DATA: All w	ell data and app	olicable wellbor	re diagrams	are ATTACHE	D.			
IV.	This is not an expa	ansion of an exi	sting project.						
V.	A map is attached drawn around each	that identifies all proposed injection	wells and lease on well. This cire	s within two r	niles of any pro the well's area	oposed injecti of review.	on well wit	th a <i>ONE-Mile</i> ra	adius circle
*VI.	A tabulation is attact There are NO (0) W of each well's type, o NO P&A Wells pend	<i>lells in the subjection,</i> date	ect AOR which	Penetrate th	e proposed D	evonian inte	erval. The	data includes a	description
VII.	The following data	is ATTACHED	on the proposed	l operation, in	cluding:				
	<ol> <li>Proposed average</li> <li>Whether the system</li> <li>Proposed average</li> <li>Sources and an produced water;</li> <li>If injection is for chemical analys wells, etc.).</li> </ol>	stem is open or c ge and maximun appropriate ana ; and,	losed; n injection press lysis of injection es into a zone no	ure; fluid and con	npatibility with t	the receiving	mile of the	e proposed well.	attach a
*VIII.	Appropriate geolo thickness, and dep containing waters well as any such s	oth. Give the ge- with total dissol	ologic name, ar ved solids conc	nd depth to be entrations of	ottom of all ur	nderground s or less) overl	sources of	drinking water	(aquifers
IX.	Stimulation progra	m – a conventio	onal acid job m	ay be perfor	med to clean	and open the	e formatio	n.	
*X.	Attach appropriate resubmitted). Well	logging and tes I Logs will be fi	st data on the w led with OCD.	ell. (If well l	ogs have beer	n filed with th	ne Division	, they need no	t be
*XI.	There are NO wate ATTACHED.	er wells/ PODs v	within one mile	of the propo	sed salt water	r disposal w	ell. Repre	esentative analy	yses are
XII.	An affirmative state was found of open water.	tement is ATTA faults or any oth	CHED that avai ner hydrologic co	lable geolog	ic and engine ween the dispo	ering data h	as been e any under	xamined and no ground sources	o evidence of drinking
XIII.	"Proof of Notice" s and/or mineral own	section on the r	next page of this ile and federal	s form has b and state mi	een complete nerals - all ha	d and ATTA ve been noti	CHED. Th	nere are 3 offse location is Fed	t lessees deral.
XIV.	Certification: I hereb belief.	y certify that the	information sub	mitted with th	is application is	s true and co	rrect to the	best of my kno	wledge and
	NAME: Ben S	Stone	TITLE: SOS Cor	nsulting, LL(	agent for Tro	ove Energy a	and Water,	LLC	
	SIGNATURE:	Sen Xa	ec.				DATE:	3/22/2019	

If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be resubmitted. Please show the date and circumstances of the earlier submittal:

E-MAIL ADDRESS: ben@sosconsulting.us

### FORM C-108 - APPLICATION FOR AUTHORIZATION TO INJECT (cont.)

- III. WELL DATA The following information and data is included (See ATTACHED Wellbore Schematic):
- A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:
  - (1) Lease name; Well No., Location by Section, Township and Range; and footage location within the section.
  - (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
  - (3) A description of the tubing to be used including its size, lining material, and setting depth.
  - (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District Offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

- B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.
  - (1) The name of the injection formation and, if applicable, the field or pool name.
  - (2) The injection interval and whether it is perforated or open-hole.
  - (3) State if the well was drilled for injection or, if not, the original purpose of the well.
  - (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
  - (5) Give the depth to and the name of the next higher and next lower oil or gas zone in the area of the well, if any.
- XIV. PROOF OF NOTICE pursuant to the following criteria is ATTACHED.

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) The intended purpose of the injection well; with the exact location of single wells or the Section, Township, and Range location of multiple wells;
- (3) The formation name and depth with expected maximum injection rates and pressures; and,
- (4) A notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

### C-108 - Items III, IV, V

Item III - Subject Well Data

Wellbore Diagram - PROPOSED

### Item IV - Tabulation of AOR Wells

NO wells penetrate the proposed injection interval.

### Item V – Area of Review Maps

- 1. Two Mile AOR Map with One-Mile Fresh Water Well Radius
  - 2. One-Half Mile AOR Map

All Above Exhibits follow this page.


### WELL SCHEMATIC - PROPOSED WLC Mid Federal SWD Well No.4



### API 30-025-xxxxx

1470' FSL & 1170' FEL, SEC. 17-T25S-R33E LEA COUNTY, NEW MEXICO SWD; Devonian-Silurian (97869)

Spud Date: 11/01/2019 SWD Config Dt: 12/15/2019

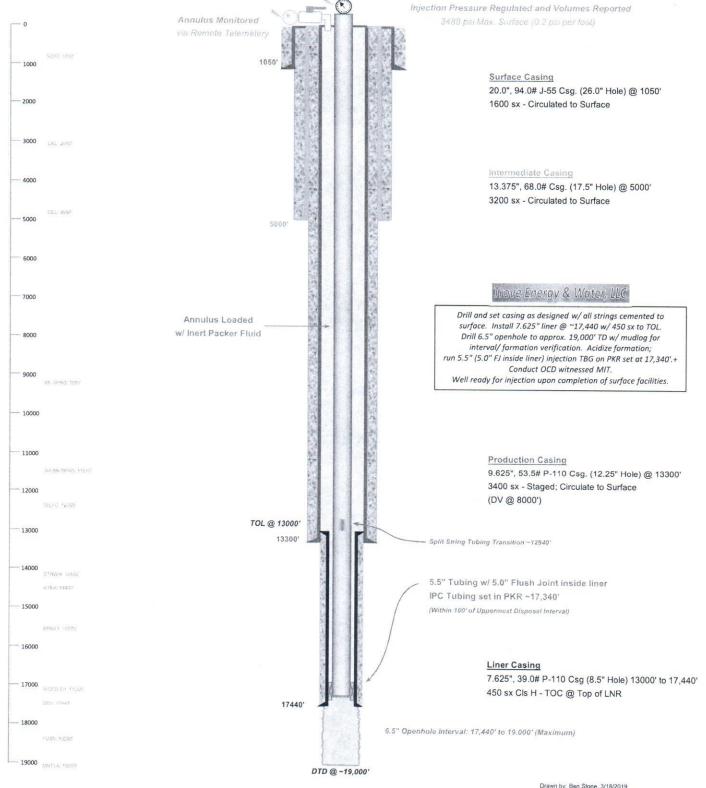

Televisia




# WLC Mid Federal SWD No.4 - Area of Review / 2 Miles

88 15 (Attachment to NMOCD Form C-108 - Item V) Brininstool SWD #1 314-Mile Radius 1 W 6 100 183 1 SANTARIA MANAGAMANA MANAGAMANA located within one mile. 181 NO Water Wells Commence School Lat. 32.127332; Long. -103.589532 WLC Mid Federal SWD No.4 1470' FSL & 1170' FEL Sec. 17, Twp 255, Rng 33E TROVE ENERGY and WATER API No. 30-025-xxxxx ( p)

# WLC Mid Federal SWD Well No.4 - One Mile Area of Review / Overview Map

(Attachment to NMOCD Form C-108, Application for Authority to Inject.)

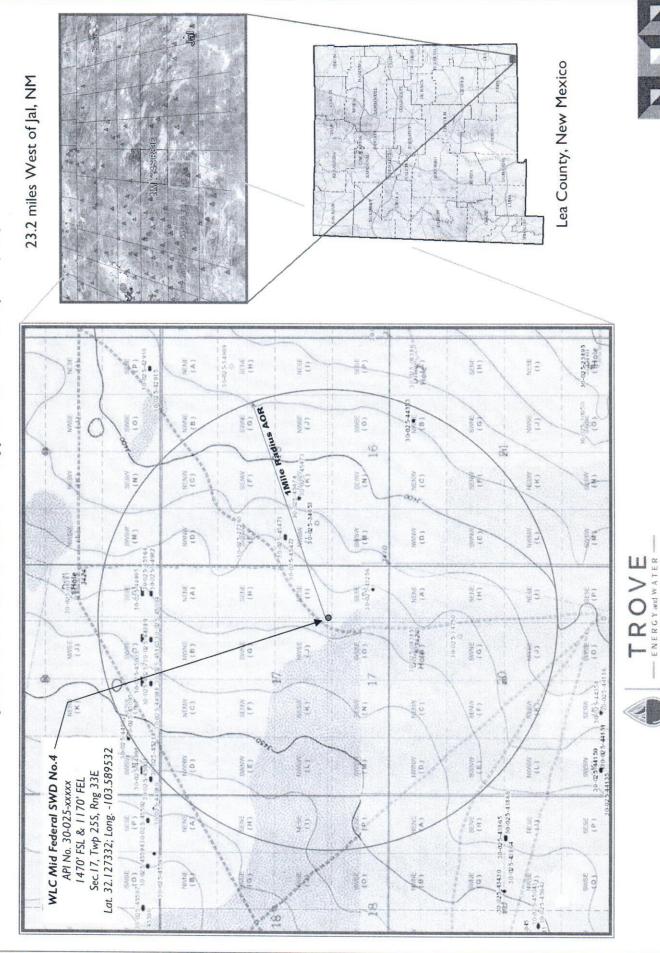



Area of Review Well Data

# THERE ARE NO WELLS WHICH PENETRATE THE PROPOSED DEVONIAN FORMATION IN THE ONE-HALF MILE AREA of REVIEW

### **C-108 ITEM X**

### LOGS and AVAILABLE TEST DATA

A Standard Suite of Logs will be run after drilling the well and submitted to the Division.

### C-108 ITEM VII - PROPOSED OPERATION

### Trove WLC Mid Federal SWD #4

### Commercial SWD Facility

Upon approval of all permits for SWD, operations would begin within 30 days. Completion of the well operations will take approximately 6-8 weeks. Facility construction including installation of the tank battery, berms, plumbing and other and associated equipment would be occurring during the same interval but at a different location from the well. In any event, it is not expected for the construction phase of the project to last more than 60 days, depending on availability of contractors and equipment.

### Configure for Salt Water Disposal

Prior to commencing any work, an NOI sundry(ies) will be submitted to configure the well for SWD and will detail the completion workover including all work otherwise described above, any change to the procedure noted herein and to perform mechanical integrity pressure test per OCD test procedures. (Notify NMOCD 24 hours prior.) The casing/tubing annulus will be monitored for communication with injection fluid or loss of casing integrity.

### **Operational Summary**

The SWD facility will not be fenced so that trucks may access for load disposal 24/7.

Future plans would include tying the SWD into a pipeline so the well and injection equipment will be a closed system and equipped with pressure limiting devices and volume meters. The annulus, loaded with an inert, anti-corrosion packer fluid, will be monitored for pressure.

The facility and tanks will be equipped with telemetry devices and visual alarms to alert the operator and customers of full tanks or an overflow situation.

Anticipated daily maximum volume is 30,000 bpd and an average of 17,500 bpd at a maximum surface injection pressure of 3488 psi (.2 psi/ft gradient – maximum pressure will be adjusted If the top of interval is modified after well logs are run).

Potential releases will be contained and cleaned up immediately. The operator shall repair or otherwise correct the situation within 48 hours before resuming operations. OCD will be notified within 24 hours of any release greater than 5 bbls. If required, remediation will start as soon as practicable. Operator shall comply with 19.15.29 NMAC and 19.15.30 NMAC; as necessary and appropriate and OCD form C-141 will be submitted promptly.

### C-108 ITEM VII - PRODUCED WATER ANAYLSES

**Item VII.4 – Water Analysis of Source Zone Water** 

Delaware Bone Spring Wolfcamp

Item VII.5 - Water Analysis of Disposal Zone Water

Devonian

Water Analyses follow this page.

# C-108 Item VII.5 - Produced Water Data Trove Energy & Water, LLC - WLC Mid Federal Project Area

### SOURCE ZONE

DELAWARE	Lab ID
	Lab ID

API No 3001510181 Sample ID 5532
Sample No

Well Name SUPERIOR STATE 002

Location ULSTR 08 25 S 30 E Lat / Long 32.14281 -103.89616

1980 S 660 E County Eddy

Operator (when sampled)

Field CORRAL CANYON Unit I

Sample Date Analysis Date

Sample Source SWAB Depth (if known)
Water Typ

ph alkalinity\_as\_caco3\_mgL

ph\_temp\_F hardness\_as\_caco3\_mgL

specificgravity hardness\_mgL
specificgravity\_temp\_F resistivity\_ohm\_cm

tds\_mgL 155173 resistivity\_ohm\_cm\_temp

tds\_mgL\_180C conductivity

chloride\_mgL 92820 conductivity\_temp\_F

sodium\_mgL carbonate\_mgL

calcium\_mgL bicarbonate\_mgL 122
iron\_mgL sulfate\_mgL 133

barium\_mgL hydroxide\_mgL

 magnesium\_mgL
 h2s\_mgL

 potassium\_mgL
 co2\_mgL

 strontium\_mgL
 o2\_mgL

manganese\_mgL anionremarks

Remarks

(Produced water data courtesy of NMT Octane NM WAIDS database.)



# C-108 Item VII.5 - Produced Water Data Trove Energy & Water, LLC - WLC Mid Federal Project Area

### **SOURCE ZONE**

BON	NE SPRING	3						Lab ID		
	API No	30025335	29					Sample	) ID	6681
	Well Name	THYME A		ERAL	002			Sample	No	
	Location	ULSTR	01 23	S 32	Е	Lat / Long	32.33657	-103	3.62470	
		16	50 N	1650	E			County	Lea	
	Operator	(when san	npled)							
			Field	RED T	ANK			Unit G		
	Sar	mple Date		11/27/200	01	Analysis Date				
			Sample	Source			Depth	(if known)		
			Water T					,		
	ph				6.1	alkalir	nity_as_caco3	_mgL		
	ph_ter	mp_F				hardn	ess_as_caco3	3_mgL		
	specif	icgravity			1.15	hardn	ess_mgL			
	specif	icgravity_te	mp_F			resisti	vity_ohm_cm			
	tds_m	igL			172896	resisti	vity_ohm_cm	_temp_		
	tds_m	gL_180C				condu	ctivity			
	chloric	de_mgL			104976	condu	ctivity_temp_	F		
	sodiur	m_mgL				carbo	nate_mgL			
	calciu	m_mgL			0	bicarb	onate_mgL		7	81
	iron_n	ngL			0	sulfate	e_mgL		11	50
	bariun	n_mgL			0	hydro	xide_mgL			
	magn	esium_mgL	•		2025	h2s_r	ngL			0
	potass	sium_mgL				co2_r	ngL			
	stront	ium_mgL				o2_m	gL			
	mang	anese_mgL				anion	remarks			

(Produced water data courtesy of NMT Octane NM WAIDS database.)

Remarks



### C-108 Item VII.5 - Produced Water Data Trove Energy & Water, LLC - WLC Mid Federal Project Area

### SOURCE ZONE

W	0	C	Δ	M	P

API No

**Well Name** 

Lab ID

Sample ID

5096

LAGUNA PLATA FEDERAL UNIT 001

710

E

46915

27270

Sample No

Location ULSTR 22 19 S 33 E

1980

-103.64461

County Lea

Operator (when sampled)

3002501678

Field

S

TONTO

Unit I

Sample Date

Analysis Date

Sample Source DST

Depth (if known)

Water Typ

ph

alkalinity\_as\_caco3\_mgL

ph\_temp\_F

hardness\_as\_caco3\_mgL

specificgravity

hardness\_mgL

Lat / Long 32.64341

specificgravity\_temp\_F

resistivity\_ohm\_cm

tds\_mgL

resistivity\_ohm\_cm\_temp\_

tds\_mgL\_180C

conductivity

chloride\_mgL

conductivity\_temp\_F

sodium\_mgL

carbonate mgL

calcium\_mgL

bicarbonate\_mgL

714 1116

iron\_mgL barium\_mgL

sulfate\_mgL

hydroxide\_mgL

magnesium\_mgL

h2s\_mgL

potassium\_mgL

co2\_mgL

strontium\_mgL

o2 mgL

manganese\_mgL

anionremarks

Remarks

(Produced water data courtesy of NMT Octane NM WAIDS database.)



# C-108 Item VII.5 - Produced Water Data Trove Energy Water, LLC - WLC Mid Federal Project Area

### **DISPOSAL ZONE**

DEVONIAN							Lab ID		
API No Well Name	30025210 ANTELOF	)82 PE RIDGE	UNIT	003			Sample Sample		5720
Location	ULSTR	34 23 980 S	S 34	E W	Lat / Long	32.25922	-103	3.46068 Lea	
Operator	(when sam	npled)							
Sar	mple Date	Field	ANTELC 11/14/1967	PE RIDG	E Analysis Date		Unit K		
		Sample S Water Ty	Source UN p	KNOWN		Depth (if	known)		
ph				6.9	alkalinit	y_as_caco3_m	ngL		
ph_ter	mp_F				hardnes	s_as_caco3_r	ngL		
specif	icgravity				hardnes	s_mgL			
specif	icgravity_ter	mp_F			resistivi	ty_ohm_cm			
tds_m	gL			80187	resistivi	ty_ohm_cm_te	mp_		
tds_m	gL_180C				conduct	ivity			
	de_mgL			47900	conduct	ivity_temp_F			
	n_mgL				carbona	ite_mgL			
	m_mgL				bicarbo	nate_mgL		476	
iron_n					sulfate_	mgL		900	
barium	n_mgL				hydroxid	de_mgL			
magne	esium_mgL				h2s_mg	L			
potass	sium_mgL				co2_mg	L			

(Produced water data courtesy of NMT Octane NM WAIDS database.)

o2\_mgL

anionremarks

strontium\_mgL

Remarks

manganese\_mgL



### **Geologic Information**

The Devonian and Silurian consist of carbonates including light colored dolomite and chert intervals interspersed with some tight limestone intervals. Several thick sections of porous dolomite capable of taking water are believed present within the subject formations in the area. Depth control data was inferred from deep wells to the south and east. If the base of Devonian and top of Silurian rocks come in as expected the well will only be drilled deep enough for adequate logging rathole.

At a proposed depth of 19,000' BGL (Below Ground Level) the well will TD approximately 1,560' below the estimated top of the Devonian. Mud logging through the interval will ensure the target interval remains in Devonian and Silurian. Once Devonian is determined, the casing shoe depth will be set at an approximate maximum upper depth of 17,440' BGL. Injection will occur through the resulting openhole interval. Should mud or other logs indicate depth adjustment is required to exploit the desired formation as described; sundries with appropriate data will be filed with the OCD.

The Devonian is overlain by the Woodford Shale and Mississippian Lime and underlain by the Middle and Lower Ordovician; Simpson, McKee and Ellenburger.


Fresh water in the area is generally available from the Rustler and Santa Rosa formations. State Engineer's records show water wells in the area with a depth to groundwater of 90 to 185 feet and an average depth of 142 feet.

There are NO water wells located within one mile of the proposed SWD however; a representative analysis of area fresh water is included in this application.

Geological Data

### EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT

Map Source: <u>State of stress in the Permian Basin, Texas and New Mexico: Implications for induced seismicity (Figure 1)</u>; Jens-Erik Lund Snee/ Mark Zoback, February 2018

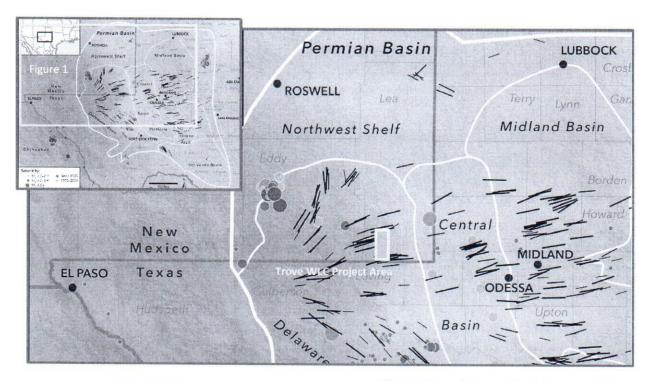

TROVE PSE PROJECT VICINITY

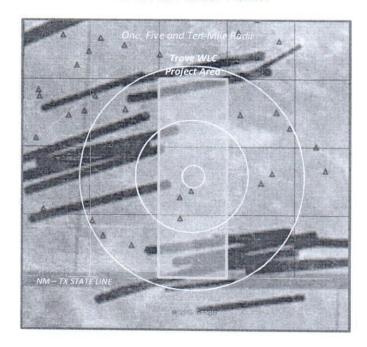


Figure 1. State of stress in the Permian Basin, Texas and New Mexico. Black lines are the measured orientations of the maximum horizontal stress (SHmax), with line length scaled by data quality. The colored background is an interpolation of measured relative principal stress magnitudes (faulting regime) expressed using the Aφ parameter (see text for details) of Simpson (1997). Blue lines are fault traces known to have experienced normalsense offset within the past 1.6 Ma, from the USGS Quaternary Faults and Folds Database (Crone and Wheeler, 2000). The boundary between the Shawnee and Mazatzal basement domains is from Lund et al. (2015), and the Precambrian Grenville Front is from Thomas (2006). The Permian Basin boundary is from the U.S. Energy Information Administration, and the subbasin boundaries are from the Texas Bureau of Economic Geology Permian Basin Geological Synthesis Project. Earthquakes are from the USGS National Earthquake Information Center, the TexNet Seismic Monitoring Program, and Gan and Frohlich (2013). Focal mechanisms are from Saint Louis University (Herrmann et al., 2011).


Geological Data

### EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

In the following map, a layer with USGS historical earthquake data is overlaid and, a layer showing lines to represent Precambrian faults as documented by Ruppel, et al. (2005). Finally, a layer showing all currently permitted SWDs completed or proposed to be completed in the Devonian (Silurian) formation.

The USGS earthquakes shown are well known to the area. The 2012 quake located approximately 13 miles due east of Loving is also shown (22.4 miles). This was perhaps the most significant of the area in recent years but was determined to not be related to oil and gas activity. The best known and largest in recent history was the 1992, 4.6 magnitude quake centered south of Eunice, NM (29.5 miles).

The Precambrian faults and existing Devonian SWDs are discussed in more detail on the next page.

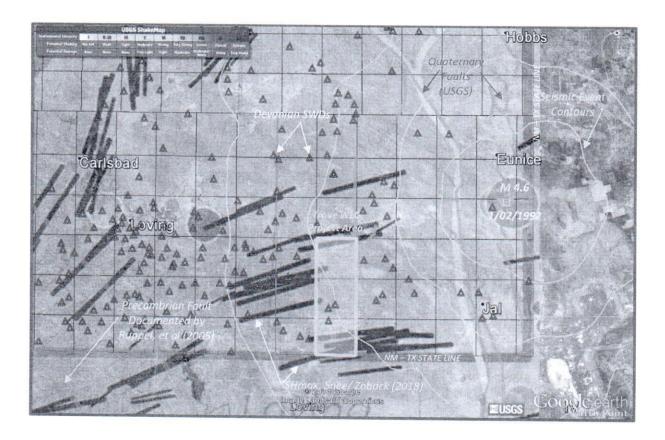


REGIONAL VIEW - DEVONIAN SWD LOCATIONS, PRECAMBRIAN FAULTS, SHMAX, USGS MAGNITUDE

Geological Data

### EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

The primary Precambrian faults in the area as documented by Ruppel, et al. (2005) is represented on this map by the thick, pink colored lines. The most significant of these is the fault associated with the Rio Grande Rift, running southeast to northwest and, runs adjacent to a portion of Hwy 285 however; only a small portion the associated fault which runs parallel approximately 15 miles northeast is depicted below. The Trove WLC Project SWD Area is located some 30 miles from the fault. Other documented faults (USGS, 2000) are shown for eastern Lea County and extending into west Texas. Other Devonian SWDs in the area are also shown (small purple triangles) completed or proposed to be completed in the Devonian (Silurian) formation.


The previously referenced study by Snee and Zoback (shown on previous exhibits) evaluated the strike-slip probability using probabilistic FSP (Fault Slip Potential) analysis of known faults in the Permian Basin. The study predicts that the Precambrian fault shown here has less than a 10% probability of being critically stressed to the point of creating an induced seismicity event. The main reason for the low probability is due to the relationship of the strike of the fault to the regional S<sub>Hmax</sub> orientation; the proposed SWD being well removed from the area.

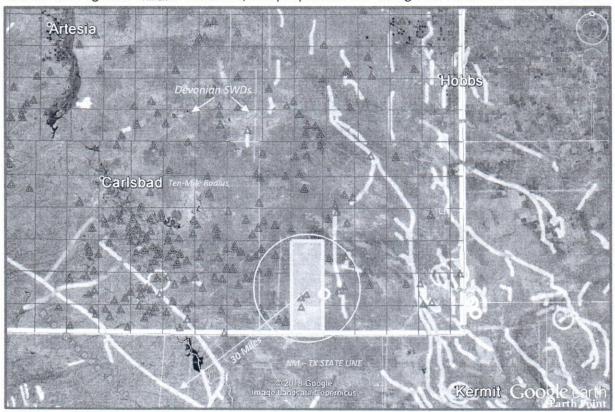

VICINITY - PERMITTED DEVONIAN SWDs, COMPOSITE FAULTS

**Geological Data** 

### EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

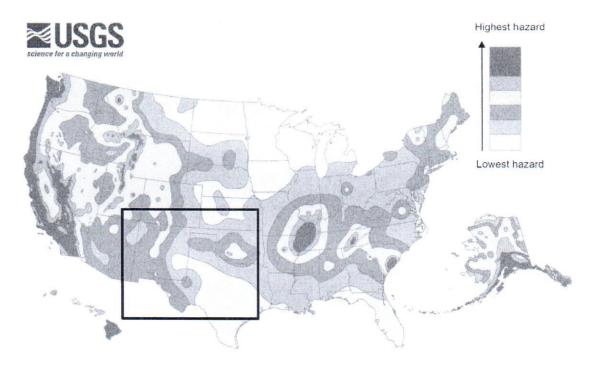


**2014 map data:** The USGS notes in its report that <u>fracking</u> may be to blame for a sizeable uptick in earthquakes in places like <u>Oklahoma</u>. "Some states have experienced increased seismicity in the past few years that may be associated with human activities such as the disposal of wastewater in deep wells," the report says. USGS hopes to use that data in future maps but it isn't included in this one. "Injection-induced earthquakes are challenging to incorporate into hazard models because they may not behave like natural earthquakes and their rates change based on man-made activities," the report says.



Geological Data

EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)



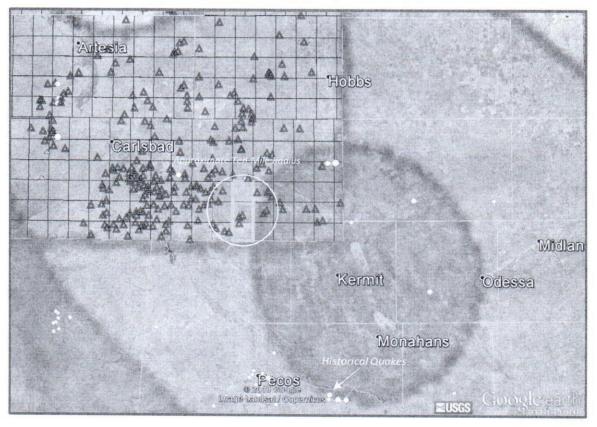


An updated USGS map for 2018 is on the next page. While methodology remained essentially the same according to USGS, the interpreted results and color-coding did have some modification. However, the subject area in southeast New Mexico on both maps remains very low and on the 2018 map, the area is assigned a value of <1% of "potentially minor-damage ground shaking".

Geological Data

### EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

### USGS 2018 ONE-YEAR MODEL

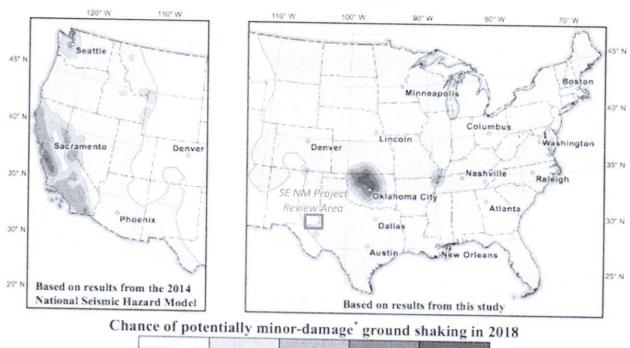

2% - 5%5% - 10%

Map showing chance of damage from an earthquake in the Central and Eastern United States during 2018. Percent chances are represented as follows: pale yellow, less than 1 percent; dark yellow, 1 to 2 percent; orange, 2 to 5 percent; red, 5 to 10 percent; dark red, 10 to 12 percent. See Hazard from the western United States from the 2014 National Seismic Hazard Maps (Petersen et al., 2014) for comparison.


The USGS has produced the 2018 one-year probabilistic seismic hazard forecast for the central and eastern United States from induced and natural earthquakes. For consistency, the updated 2018 forecast is developed using the same probabilistic seismicity-based methodology as applied in the two previous forecasts.

Based on publicly available data for the subject area, it is reasonable to believe the risk of induced seismic activity due to disposal injection into this well is extremely low.

equivalent to Modified Mercalli Intensity VI, which is defined as: "Felt by all, many frightened. Some heavy furniture moved; a few instances of fallen plaster. Damage slight."

### C-108 - Item XI

Groundwater Basins - Water Column / Depth to Groundwater

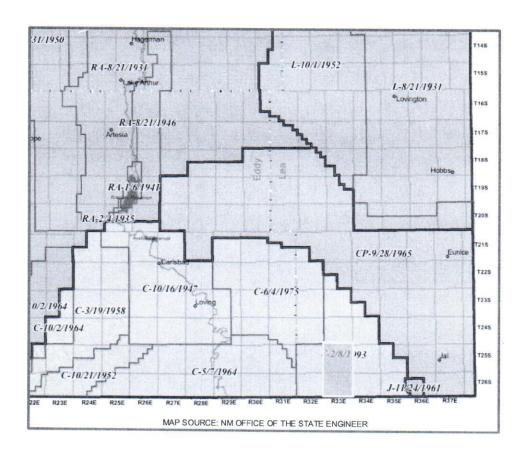

The subject well is located within the Carlsbad Basin.

Fresh water in the area is generally available from the Rustler and Santa Rosa formations. State Engineer's records show water wells in the area with a depth to groundwater of 90 to 185 feet and an average depth of 142 feet.

There are NO water wells located within one mile of the proposed SWD.




### C-108 Item XI

### Water Wells Within One Mile

### WLC Mid Federal SWD No.4 - Water Well Locator Map

There are NO water wells/PODs within a one-mile radius of the proposed SWD.

Representative analyses of wells with similar depth are included.

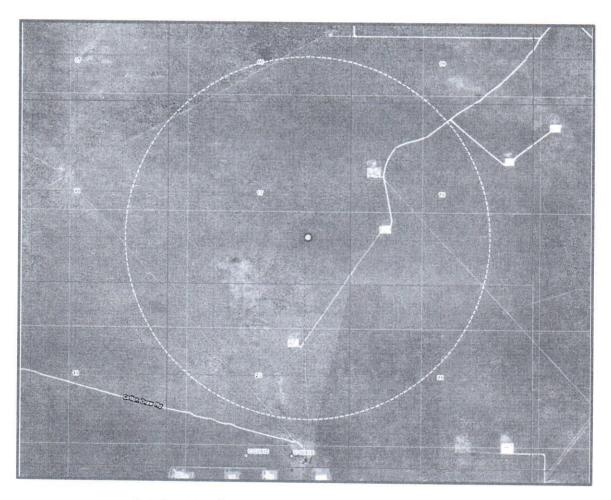

 ${\it Data from NM Office of the State Engineer displayed in OSE-GIS System}.$ 



### C-108 ITEM XII

### Geologic Affirmation

We have examined available geologic and engineering data and have found no evidence of open faults or other hydrologic connection between the disposal interval and any underground sources of drinking water.

Ben Stone, Partner SOS Consulting, LLC


Project:

Trove Energy and Water, LLC

WLC Mid Project Area Reviewed 3/5/2019

### WLC Mid Federal SWD Well No.4 - Affected Parties Plat

(Attachment to NMOCD Form C-108, Application for Authority to Inject.)

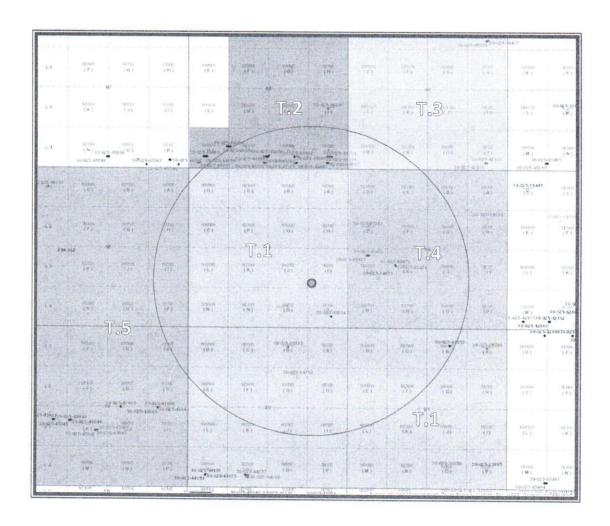



### LEGEND -

T.1 - NMNM-026394 - EOG Resources, Inc.

T.2 - NMNM-097151 - Devon Energy Prod. Co., LP

T.3 - NMNM-118726 - EOG Resources, Inc.

T.4 - VB-4422-0001 - Energen Resources, Inc.

T.5 - NMNM-110838 - EOG Resources, Inc.



### C-108 ITEM XIII - PROOF OF NOTIFICATION

### **IDENTIFICATION AND NOTIFICATION OF INTERESTED PARTIES**

### **Exhibits for Section**

Affected Parties Map

List of Interested Parties

Notification Letter to Interested Parties

**Proof of Certified Mailing** 

**Published Legal Notice** 

# C-108 ITEM XIII – PROOF OF NOTIFICATION AFFECTED PARTIES LIST

SOS Consulting is providing electronic delivery of C-108 applications.

ALL APPLICABLE AFFECTED PARTIES ARE PROVIDED A LINK IN THE NOTICE LETTER

TO A SECURE SOS/ CITRIX SHAREFILE® SITE TO VIEW AND DOWNLOAD

A FULL COPY OF THE SUBJECT C-108 APPLICATION IN PDF FORMAT.

"AFFECTED PERSON" MEANS THE DIVISION DESIGNATED OPERATOR; IN THE ABSENCE OF AN OPERATOR, A LESSEE WHOSE INTEREST IS EVIDENCE BY A WRITTEN CONVEYANCE DOCUMENT EITHER OF RECORD OR KNOWN TO THE APPLICANT AS OF THE DATE THE APPLICANT FILES THE APPLICATION; OR IN THE ABSENCE OF AN OPERATOR OR LESSEE, A MINERAL INTEREST OWNER WHOSE INTEREST IS EVIDENCED BY A WRITTEN CONVEYANCE DOCUMENT EITHER OF RECORD OR KNOWN TO THE APPLICANT AS OF THE DATE THE APPLICANT FILED THE APPLICATION FOR PERMIT TO INJECT.; PER OCD RULES NMAC 19.15.26.7, A. AND 19.15.26.8, B.2.

### SURFACE OWNER

U.S. DEPARTMENT OF INTERIOR
Bureau of Land Management
Oil & Gas Division
620 E. Greene St.
Carlsbad, NM 88220
Certified: 7018 0360 0001 8569 7023

OFFSET MINERALS LESSEES and OPERATORS (All Notified via USPS Certified Mail)

### BLM Lease NMNM-026394, 118729, 110838 (T.1, T.3 and T.5 on Map) Lessee & Operator

EOG RESOURCES, INC. 105 S. 4th St. Artesia, NM 88210 Certified: 7018 0360 0001 8569 7016

### BLM Lease NMNM-019859 (T.2 on Map) Lessee & Operator

DEVON ENERGY PRODUCTION CO., LP 333 W. Sheridan Avenue OKC, OK 73102-5010 Certified: 7018 0360 0001 8569 7009

### State Lease VB-4422-0002 (T.4 on Map)

DIAMONDBACK ENERGY, INC. ENERGEN RESOURCES, INC. 500 West Texas Ave, Suite 1200 Midland, TX 79701

Operator EOG RESOURCES, INC. 105 S. 4th St. Artesia, NM 88210

# C-108 ITEM XIII - PROOF OF NOTIFICATION AFFECTED PARTIES LIST (cont.)

### OFFSET MINERALS OWNERS (Notified via USPS Certified Mail)

U.S. DEPARTMENT OF INTERIOR Bureau of Land Management Oil & Gas Division 620 E. Greene St. Carlsbad, NM 88220

STATE OF NEW MEXICO
Oil, Gas and Minerals Division
310 Old Santa Fe Trail
Santa Fe, NM 87504
Certified: 7018 0360 0001 8569 6996

### REGULATORY

NEW MEXICO OIL CONSERVATION DIVISION (FedEx'ed original and copy) 1220 S. St. Francis Dr. Santa Fe, NM 87505

NEW MEXICO OIL CONSERVATION DIVISION (FedEx'ed copy) 1625 N. French Drive Hobbs, NM 88240

WLC-M#3



Years of Quality Service

March 18, 2019

## NOTIFICATION TO INTERESTED PARTIES via U.S. Certified Mail – Return Receipt Requested

To Whom It May Concern:

Trove Energy and Water, LLC, Hobbs, New Mexico, is preparing applications to the New Mexico Oil Conservation Division to drill and complete for salt water disposal the WLC Mid Federal SWD Well No.4. The proposed commercial operation will be for produced water disposal from area operators. As indicated in the notice below, the well will be located in Section 17, Township 25 South, Range 33 East in Lea County, New Mexico.

The published notice states that the interval will be from 17,440 feet to 19,000 feet into the Devonian, Silurian and Fusselman formations.

Following is the notice published in the Hobbs News-Sun, Hobbs, New Mexico on or about March 14, 2018.

### LEGAL NOTICE

Trove Energy and Water, LLC, 1919 North Turner, Hobbs, NM 88240, is filing Form C-108 (Application for Authority to Inject) with the New Mexico Oil Conservation Division seeking administrative approval for a salt water disposal well. The proposed well, the WLC Mid Federal SWD Well No.4 will be located 1470' FSL & 1170' FEL, Section 17, Township 25 South, Range 33 East, Lea County, New Mexico; approximately 23.2 miles west of Jal, NM.

Produced water from area production will be commercially disposed into the Devonian, Silurian and Fusselman formations at a maximum interval depth of 17,440' to 19,000' at a maximum surface pressure of 3488 psi and a rate limited only by such pressure. Mudlogging and e-logs will confirm final interval depths.

Interested parties wishing to object to the proposed application must file with the New Mexico Oil Conservation Division, 1220 St. Francis Dr., Santa Fe, NM 87505, (505)476-3460 within 15 days of the date of this notice. Additional information may be obtained from the applicant's agent, SOS Consulting, LLC, (903)488-9850 or, email info@sosconsulting.us.

You have been identified as a party who may be interested as an offset lessee or operator.

<u>You are entitled to a full copy of the application</u>. A full copy in PDF format will be posted on the SOS Consulting *ShareFile* site and available for future download (posting may lag behind the notice effort).

Use the URL link: <a href="https://sosconsulting.sharefile.com/d-s8b8f4ec6aae4fc29">https://sosconsulting.sharefile.com/d-s8b8f4ec6aae4fc29</a> (Please Note: The ShareFile service is powered by Citrix Systems and is completely secure.\*)

The link to this file will be active for 60 days from the date of this letter. Your company can access and download the file a maximum of five (5) times. (One copy may be downloaded and shared as needed among your company.)

If preferred, you may call SOS Consulting, LLC at 903-488-9850, or email info@sosconsulting.us, and the same PDF file copy will be expedited to you via email.

Please use a subject like "WLC Mid Fed SWD #4 March 2019 PDF Copy Request".

Thank you for your attention in this matter.

Best regards,

Ben Stone, SOS Consulting, LLC

Agent for Trove Energy and Water, LLC

Cc: Application File

SOS Consulting is committed to providing superior quality work using technology to assist clients and affected parties in obtaining the documentation required. SOS will continue to utilize methods which are less energy and resource intensive including, the reduction of paper copies.

We hope you'll partner with us and appreciate these efforts.

\* You will be asked for your email, name and company.
This will not be used by anyone except keeping track of the file downloads.
You will not be solicited by SOS or anyone else. Data is stored on Citrix Systems servers only.

CITRIX



### C-108 - Item XIV

Proof of Notice (Certified Mail Receipts)



### Affidavit of Publication

STATE OF NEW MEXICO COUNTY OF LEA

I. Daniel Russell, Publisher of the Hobbs News-Sun, a newspaper published at Hobbs, New Mexico, solemnly swear that the clipping attached hereto was published in the regular and entire issue of said newspaper, and not a supplement thereof for a period of 1 issue(s).

> Beginning with the issue dated March 14, 2019 and ending with the issue dated March 14, 2019.

Publisher

Sworn and subscribed to before me this 14th day of March 2019.

Business Manager

ALEMANNA A CONTRACTOR OF THE PROPERTY OF THE P My commission expires

January 29, 2023 (Seal)

OFFICIAL SEAL **GUSSIE BLACK** Notary Public State of New Mexico My Commission Expires (-29-23

This newspaper is duly qualified to publish legal notices or advertisements within the meaning of Section 3, Chapter 167, Laws of 1937 and payment of fees for said

the test of the water management and a supplement the management of the

### LEGALS

LEGAL NOTICE MARCH 14, 2019

Trove Energy and Water, LLC, 1919 North Turner, Hobbs, NM 88240, is filing Form C-108 (Application for Form C-108 (Application for Authority to Inject) with the New Mexico Oil Conservation Division seeking administrative approval for a sail water disposal well. The proposed well, the WLC Mid Federal SWD Well No.4 will be located 1470 FSL & 1170 FEL. Section 17, Township 25 South, Range 33 East Lea County, New Mexico, approximately 23.2 miles west of Jai, NM

Produced water from area production will be commercially disposed into the Devonian. Silurian and Fusselman formations at a maximum interval depth of 17,440° to 19,000° at a maximum surface pressure of 3488 psi and a rate limited only by such pressure. only by such pressure. Mudiogging and e-logs will confirm final interval depths

Interested parties wishing to object to the proposed application must file with the N e w M e x i c o O i Conservation Division, 1220 St. Francis Dr., Santa Fe, NM 87505, (505)476-3460 within 15 days of the date of this notice. Additional information may be obtained information may be obtained from the applicant's agent. SOS Consulting, LLC (903)488-9850 or email. info@sosconsulting.us #33881

67104420

00225809

BEN STONE SOS CONSULTING, LLC P.O. BOX 300 COMO, TX 75431