

## District I

1625 French Dr., Hobbs, NM 88240

## District II

1301 W. Grand Ave., Artesia, NM 88210

## District III

1000 Rio Brazos Rd., Aztec, NM 87410

## District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103

June 19, 2008

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO.

30-015-00812

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil &amp; Gas Lease No.

7. Lease Name or Unit Agreement Name

WEST RED LAKE UNIT

8. Well Number #10

9. OGRID Number 277558

10. Pool name or Wildcat:

Wildcat San Andres

## SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

LIME ROCK RESOURCES II-A, L.P.

3. Address of Operator

c/o Mike Pippin LLC, 3104 N. Sullivan, Farmington, NM 87401

4. Well Location

Unit Letter J : 2310 feet from the SOUTH line and 1650 feet from the EAST line

Section 7 Township 18-S Range 27-E NMPM Eddy County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3368' (Top of Csg)

## 12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

## NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐TEMPORARILY ABANDON ☐ CHANGE PLANS ☐PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐DOWNHOLE COMMINGLE ☐OTHER: ☐

## SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐COMMENCE DRILLING OPNS. ☐ P AND A ☒CASING/CEMENT JOB ☐OTHER: P&A ☒

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1/17/12: MIRUSU. Tag CIBP @ 990'. Circ P&amp;A mud. Spot 25 sx cmt on CIBP @ 990'. W/tbg @ 60', circ 15 sx cmt to surface. . Cut off wellhead &amp; install P&amp;A marker. Released P&amp;A rig on 1/19/12. Cut off anchors &amp; clean &amp; restore location.

Spud Date: November 1932

Drilling Rig Release Date: 11/24/32

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE Petroleum Engineer - Agent

DATE

1/21/12

Type or print name

Mike Pippin

E-mail address:

mike@pippinllc.com

PHONE:

505-327-4573

For State Use Only

APPROVED BY:

TITLE

DATE

1/23/2012

Conditions of Approval (if any):

Approved for plugging of well bore only.  
Liability under bond is retained pending receipt  
of C-103 (Subsequent Report of Well Plugging)  
which may be found at OCD Web Page under  
Forms. www.emnrd.state.nm.us/oed.

RECEIVED

JAN 23 2012

NMOCD ARTESIA


RECEIVED

JAN 23 2012

NMOCD ARTESIA

# LIME ROCK RESOURCES - FINAL WELLBORE SCHEMATIC

WELL NAME: West Red Lake #10			FIELD: Red Lake			
LOCATION: 2310' FSL & 1650' FEL "J" of Sec. 7-18S-27E			COUNTY: Eddy			STATE: NM
ELEVATION: 3311' DF			SPUD DATE: 11/7/32		COMP DATE: 11/24/32	
API# 30-015-00812		PREPARED BY: T. Rutelonis & Mike Pippin			P&A DATE: 1/19/12	
	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 876'	7"				
CASING:	0' - 1750'	4 1/2"	9.5#	J-55		
CASING:						
TUBING:	0' - +/- 1475'	2-3/8 IPC				
TUBING:						

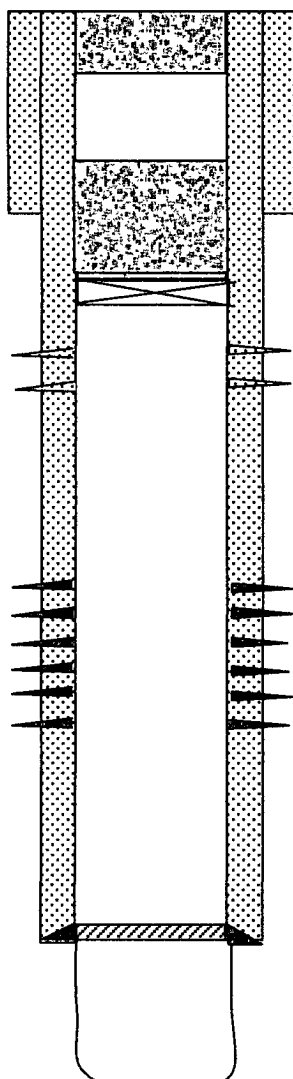

 ACTUAL

**Circ 15 sx cement from 60' back to surface.**

7" surface casing, set @ 876'

**Spot 25 sx cement from 667' to 990'**

**CIBP @ 990'**

**SAN ANDRES PERFORATIONS: 1034'-1047' (Squeezed)**

**SAN ANDRES PERFORATIONS: 1556'-1740'**

PBTD @ 1737'

4 1/2" CASING SET @ 1750' W/210 SXS CMT . TOC surface.

Open hole interval 1750'-1770'

TD @ 1770'